

Jectse M10-3

Jectse M10-3 4G Portable WiFi Router User Manual

Model: M10-3

1. PRODUCT OVERVIEW

The Jectse M10-3 is a portable 4G WiFi router designed to provide high-speed internet access on the go. With a maximum speed of 150Mbps, it supports various devices including desktops, laptops, tablets, and mobile phones. Its compact design and built-in 3000mAh lithium battery make it ideal for business, travel, and other multi-scenario applications, ensuring stable 4G internet connectivity in Europe, Southeast Asia, and Africa.



Image 1.1: Front view of the Jectse M10-3 4G Portable WiFi Router, showcasing its compact design and indicator lights.



Built-in lithium battery of 3000mah.

Scope of Application: Suitable for desktops, laptops, tablets, phones.

Image 1.2: The Jectse M10-3 router highlighting its built-in 3000mAh lithium battery, which provides extended battery life for portable use.

2. WHAT'S IN THE Box

Please verify that all items are present in the package:

- 1 x Jectse M10-3 Mobile Hotspot
- 1 x User Manual (this document)
- 1 x USB Cable



Image 2.1: Contents of the Jectse M10-3 package, including the mobile hotspot device and its USB charging cable.

3. SETUP INSTRUCTIONS

Follow these steps to set up your Jectse M10-3 Mobile Hotspot:

3.1. Inserting the SIM Card

1. Carefully remove the back cover of the mobile hotspot.
2. Locate the SIM card slot. Ensure you are inserting the SIM card into the correct slot, not the memory card slot.
3. Insert your activated 4G SIM card into the designated slot until it clicks into place.
4. Replace the back cover.



Image 3.1: Internal view of the Jectse M10-3, showing the battery compartment and the SIM card slot for network connectivity. Note the default Wi-Fi credentials printed on the label: IP: 192.168.0.1, User Name: admin, Password: admin.

3.2. Powering On

Press and hold the power button (usually located on the side or front) for a few seconds until the indicator lights illuminate.

3.3. Connecting to Wi-Fi

1. On your device (laptop, tablet, mobile phone), open the Wi-Fi settings.
2. Search for available Wi-Fi networks. The default SSID (network name) is typically printed on a label inside the device (refer to Image 3.1 for example: **SSID: 4G WIFI_XXXX**).
3. Select the network name for your Jectse M10-3.
4. Enter the Wi-Fi key (password). The default key is also printed on the label (refer to Image 3.1 for example: **KEY: 1234567890**).
5. Once connected, your device should have internet access.

4. OPERATING INSTRUCTIONS

4.1. Connecting Multiple Devices

The Jectse M10-3 can support multiple devices simultaneously, allowing you to share your 4G internet connection with laptops, tablets, and smartphones. Simply follow the Wi-Fi connection steps (Section 3.3) on each device you wish to connect.



Image 4.1: The Jectse M10-3 router demonstrating its capability to provide Wi-Fi connectivity to various devices such as tablets, laptops, and desktop computers.

4.2. Accessing the Web Management Interface

To manage advanced settings, such as changing the Wi-Fi name (SSID) or password, access the web management interface:

1. Ensure your device is connected to the Jectse M10-3's Wi-Fi network.
2. Open a web browser (e.g., Chrome, Firefox, Edge).
3. In the address bar, type the default IP address: **192.168.0.1** (as seen in Image 3.1) and press Enter.
4. Enter the default username: **admin** and password: **admin** (as seen in Image 3.1).
5. You can now configure network settings, view connected devices, and more. It is recommended to change the default password for security.

5. MAINTENANCE

To ensure optimal performance and longevity of your Jectse M10-3 Mobile Hotspot, consider the following maintenance tips:

- **Battery Care:** To prolong battery life, avoid extreme temperatures. Do not expose the device to direct sunlight for extended periods or to very cold environments. Charge the device regularly, but avoid

overcharging.

- **Cleaning:** Use a soft, dry cloth to clean the exterior of the device. Do not use liquid cleaners or aerosols, as they may damage the internal components.
- **Storage:** When not in use for extended periods, store the device in a cool, dry place. It is advisable to charge the battery to about 50% before long-term storage.
- **Software Updates:** Periodically check the manufacturer's website or the device's web management interface for any available firmware updates to ensure optimal performance and security.

6. TROUBLESHOOTING

6.1. Common Connection Issues

If you are experiencing difficulty connecting to the internet, consider the following:

- **SIM Card Activation/Traffic:** Ensure your SIM card is activated and has an active data plan. An inactive card or one without data traffic will prevent internet access.
- **Incorrect SIM Card Insertion:** Verify that the SIM card is inserted correctly into the designated SIM card slot, not into a memory card slot. Refer to Section 3.1 and Image 3.1.
- **Frequency Band Mismatch:** The frequency band of your SIM card must match the frequency bands supported by the Jectse M10-3 router. The router supports LTE bands B1 / 3 / 7 / 8 / 20 / 28AB / 38 / 40 / 41 and UMTS bands B1 / B8. If your SIM card operates on different bands (e.g., B2, B4), it will not be able to connect to the network. Contact your mobile carrier to confirm your SIM card's frequency bands.
- **Network Coverage:** Ensure you are in an area with adequate 4G network coverage from your SIM card provider.
- **Restart Device:** Try restarting the mobile hotspot and your connected device.

7. SPECIFICATIONS


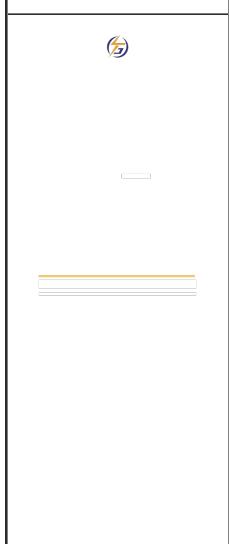

Feature	Detail
Model	M10-3 (Internal: Jectsemxpfhui9s-11)
Type	4G Mobile Hotspot
Wireless Rate	Up to 150Mbps
LTE Bands Supported	B1 / 3 / 7 / 8 / 20 / 28AB / 38 / 40 / 41
UMTS Bands Supported	B1 / B8
Battery	Built-in 3000mAh Lithium Battery
Interface Type	USB (for charging)
Applicable Devices	Desktop, Laptop, Tablet, Mobile Phone
Applicable Area	Europe / Southeast Asia / Africa
Package Dimensions	5.51 x 3.62 x 1.14 inches
Item Weight	5.3 ounces
Wireless Standard	802.11.be
Security Protocol	WPS

8. WARRANTY AND SUPPORT

The Jectse M10-3 Mobile Hotspot comes with a standard manufacturer's warranty. Please refer to the warranty card included in your product packaging for specific terms and conditions, including the warranty period and coverage details.

For technical support, troubleshooting assistance, or warranty claims, please contact Jectse customer service through the retailer where the product was purchased or visit the official Jectse website for contact information.

Related Documents - M10-3

	<p>Predator Connect W6d Dual-band WiFi 6 Router User Guide</p> <p>Comprehensive user guide for the Acer Predator Connect W6d Dual-band WiFi 6 Router, covering installation, setup, configuration, features like WiFi, LAN, WAN, security, QoS, and troubleshooting.</p>
	<p>NETGEAR AC1750 Smart WiFi Router R6400 User Manual & Setup Guide</p> <p>Comprehensive user manual for the NETGEAR AC1750 Smart WiFi Router Model R6400, detailing setup, configuration, performance optimization, and advanced features like USB storage sharing and VPN access. Learn to maximize your home network's potential.</p>
	<p>STAR-4 Kit: Easy Community Internet Service with Starlink Guest Internet Solutions</p> <p>Discover the STAR-4 kit by Guest Internet Solutions, designed for simple installation and management of community internet services using Starlink. Ideal for rural areas, it offers features like voucher access, multi-language support, and remote monitoring.</p>
	<p>RF Test Report for Botslab Battery Camera (BC-BD06-M10 Series) - FCC ID 2A22Z-W520</p> <p>Detailed RF test report for the Botslab Battery Camera, covering DFS parameters, test results, and equipment specifications according to FCC Part 15.407 and ANSI C63.10-2013 standards. Includes model numbers BC-BD06-M10 series and FCC ID 2A22Z-W520.</p>
	<p>HONOR Router 3 Quick Installation Guide</p> <p>A concise guide to installing and configuring your HONOR Router 3, including setup methods via the HUAWEI AI Life app and web browser, LED indicator explanations, and troubleshooting tips.</p>

NETGEAR®

AC1750 Smart WiFi Router
Model R6400
User Manual



Page 2/23
2021-11-09-00



[NETGEAR R6400 AC1750 Smart WiFi Router User Manual](#)

Explore the NETGEAR R6400 AC1750 Smart WiFi Router User Manual for comprehensive setup, configuration, and troubleshooting. Learn to optimize WiFi performance, utilize Gigabit Ethernet, manage USB 3.0 storage for backup and media streaming, and access advanced features like ReadySHARE Vault for Windows backups. This guide provides essential information for maximizing your home network's capabilities.