

[Manuals.plus](#) /

› [LogiLink](#) /

› LogiLink BP0169 Gas Spring Monitor Wall Mount Instruction Manual

LogiLink BP0169

LogiLink BP0169 Gas Spring Monitor Wall Mount Instruction Manual

Model: BP0169

INTRODUCTION

This manual provides comprehensive instructions for the installation, operation, and maintenance of your LogiLink BP0169 Gas Spring Monitor Wall Mount. Please read these instructions carefully before installation and retain them for future reference. This wall mount is designed to securely hold flat and curved monitors ranging from 17 to 49 inches, offering flexible positioning with its gas spring mechanism.

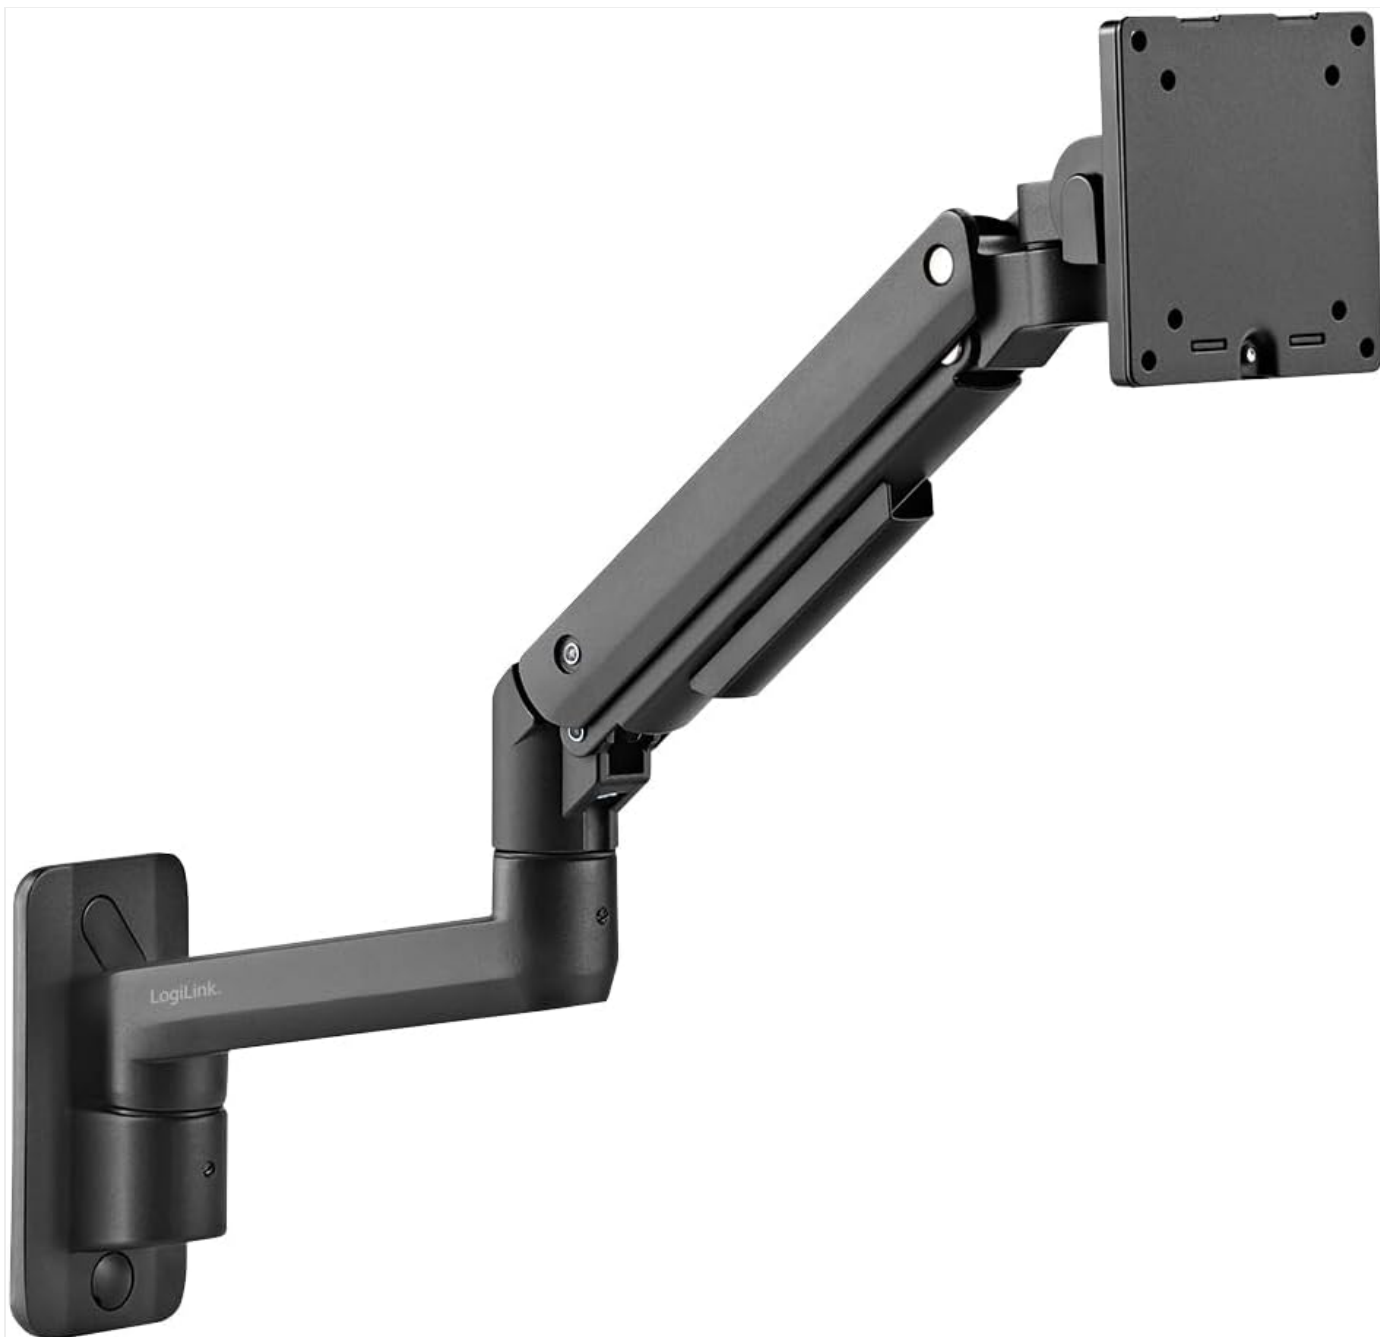


Image: The LogiLink BP0169 Gas Spring Monitor Wall Mount, showcasing its articulated arm and VESA plate.

SAFETY INFORMATION

- Ensure the mounting surface can support the combined weight of the mount and your monitor (maximum 20 kg).
- Do not exceed the maximum weight capacity of 20 kg (44 lbs).
- Use appropriate tools and follow all installation steps precisely.
- If you are unsure about any part of the installation, consult a qualified professional.
- Keep children and pets away during installation.
- Periodically check all screws and connections to ensure they remain secure.

PACKAGE CONTENTS

Please verify that all components are present before beginning installation. If any parts are missing or damaged, contact your retailer for assistance.

- Wall Mount Assembly (Main Arm with Gas Spring)
- VESA Plate
- Wall Plate
- Mounting Hardware Kit (screws, anchors, washers)
- Instruction Manual

SETUP AND INSTALLATION

This section details the steps for mounting the LogiLink BP0169 to your wall and attaching your monitor.

1. Prepare the Mounting Location

1. Identify a suitable wall stud or solid concrete wall for mounting.
2. Mark the desired height for the wall plate. Ensure it is level.

2. Install the Wall Plate

1. Drill pilot holes at the marked locations.
2. Secure the wall plate to the wall using the provided screws and anchors (if applicable for your wall type).

3. Attach the Monitor to the VESA Plate

1. Carefully place your monitor face down on a soft, clean surface.
2. Align the VESA plate with the mounting holes on the back of your monitor. The mount supports VESA patterns of 75x75mm and 100x100mm.
3. Secure the VESA plate to the monitor using the appropriate screws from the hardware kit. Do not overtighten.



Image: The LogiLink BP0169 monitor mount installed on a wall, holding a monitor above a desk, demonstrating its space-saving design.

4. Mount the Monitor Assembly to the Wall Arm

1. With assistance, carefully lift the monitor (with VESA plate attached) and slide it onto the end of the wall mount arm.
2. Ensure the monitor is securely seated and engage any locking mechanisms if present.

5. Adjust Gas Spring Tension

1. The gas spring tension needs to be adjusted to match the weight of your monitor.
2. Use the provided Allen key to turn the adjustment screw on the arm. Turn clockwise to increase tension for heavier monitors, and counter-clockwise to decrease tension for lighter monitors.
3. Adjust until the monitor stays at the desired height when moved.

OPERATING INSTRUCTIONS

The LogiLink BP0169 mount offers a wide range of motion for optimal viewing comfort.

- **Height Adjustment:** Gently push or pull the monitor to the desired vertical position. The gas spring will hold it in place.
- **Tilt:** The monitor can be tilted from -20° to $+50^{\circ}$ to reduce glare and optimize viewing angles.
- **Swivel:** The arm allows for a swivel range of -90° to $+90^{\circ}$ at the wall connection and at the monitor connection.
- **Rotation:** The VESA plate can rotate -180° to $+180^{\circ}$, allowing for portrait or landscape orientation.
- **Cable Management:** Utilize the integrated cable management channels along the arm to route and conceal monitor cables for a tidy workspace.

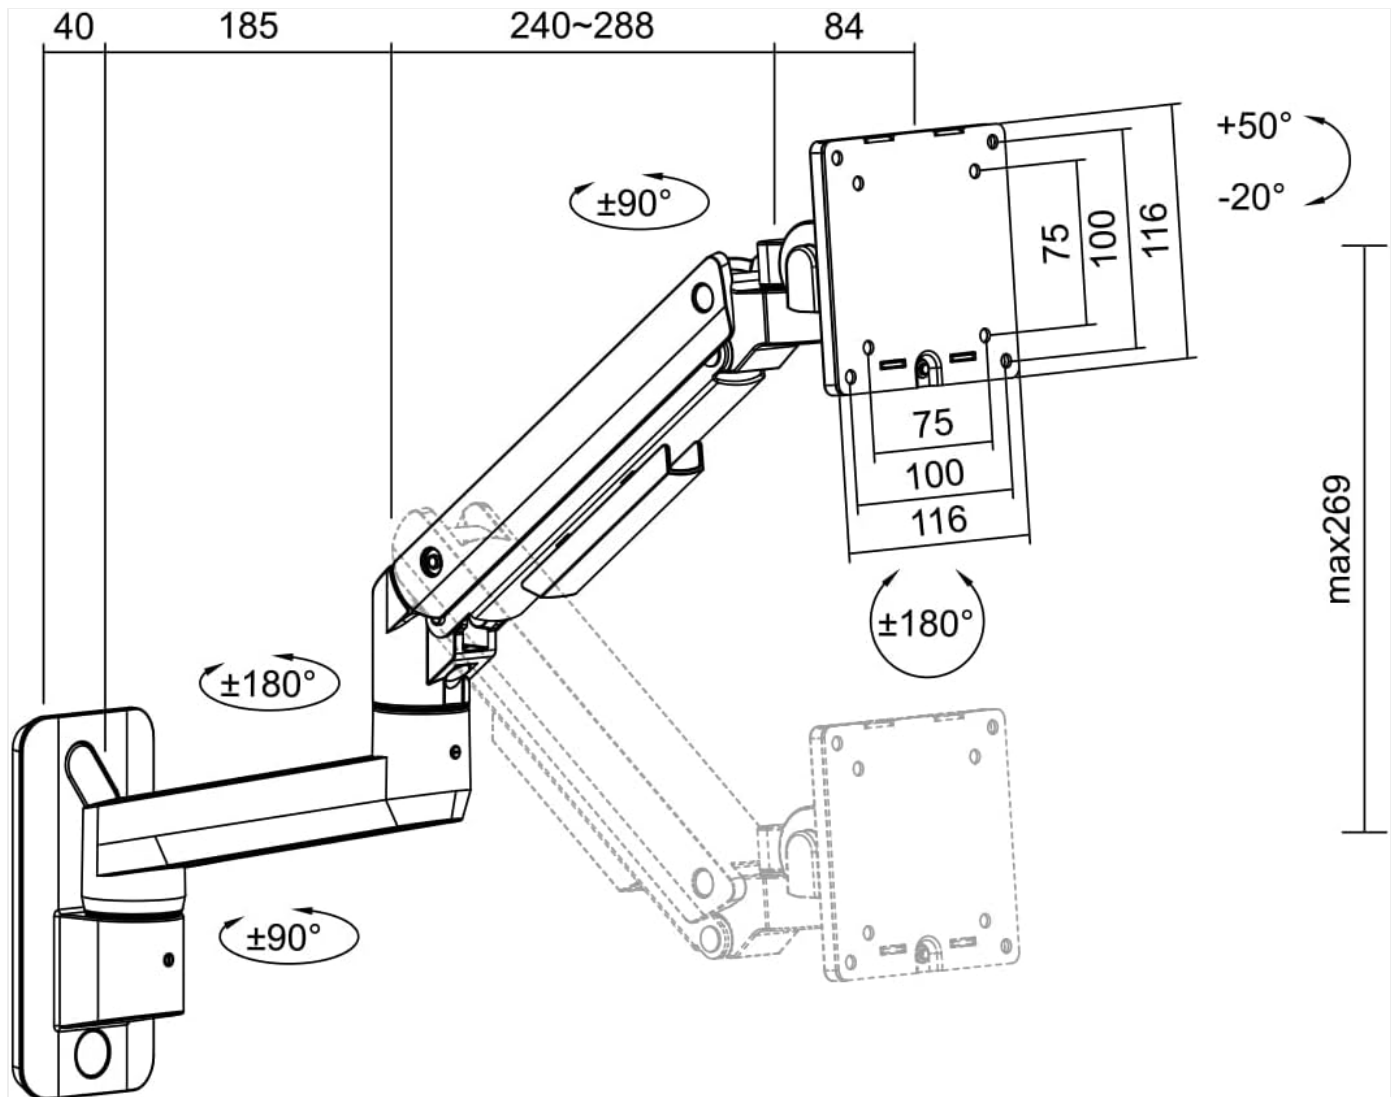


Image: A technical diagram illustrating the various dimensions and articulation ranges, including tilt, swivel, and rotation, of the LogiLink BP0169 mount.

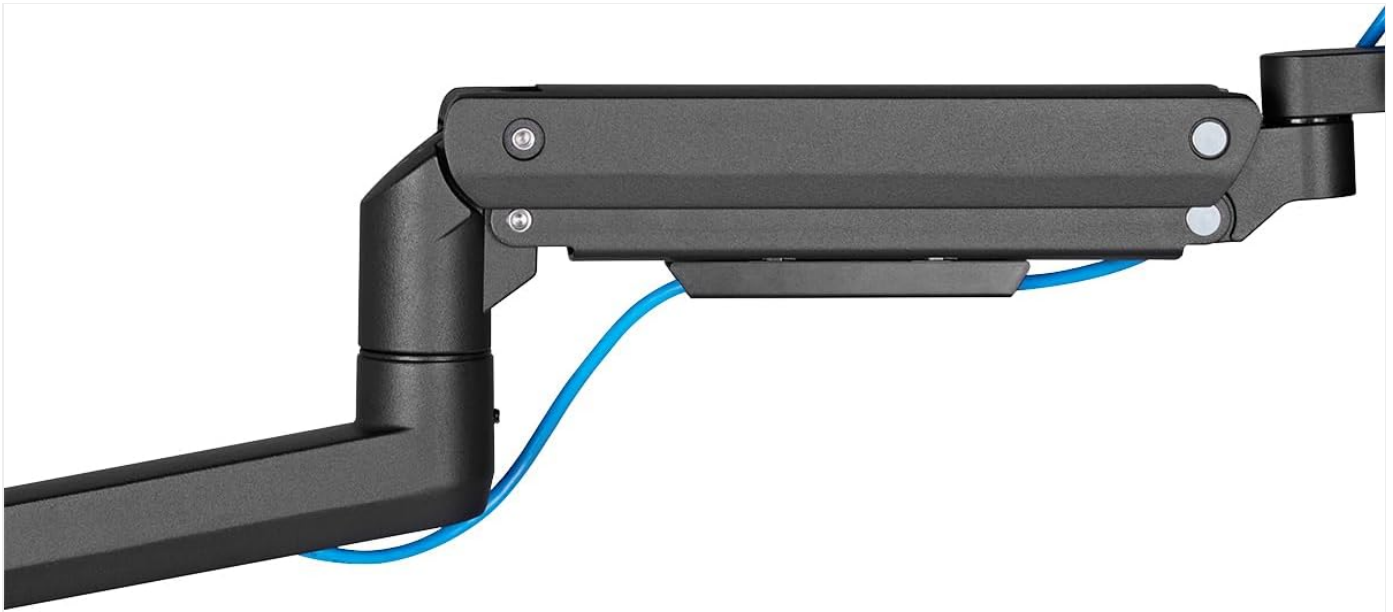


Image: A close-up view of the LogiLink BP0169 mount's arm, highlighting the integrated cable management system with a blue cable routed through it.

MAINTENANCE

- **Cleaning:** Wipe the mount with a soft, damp cloth. Avoid abrasive cleaners or solvents.
- **Periodic Checks:** Regularly inspect all mounting screws and connections to ensure they are tight and secure. Re-tighten if necessary.
- **Gas Spring Adjustment:** If the monitor does not hold its position, re-adjust the gas spring tension as described in the "Setup" section.

TROUBLESHOOTING

Problem	Possible Cause	Solution
Monitor sags or does not stay at desired height.	Gas spring tension is too low for monitor weight.	Increase gas spring tension by turning the adjustment screw clockwise.
Monitor is difficult to move up or down.	Gas spring tension is too high for monitor weight.	Decrease gas spring tension by turning the adjustment screw counter-clockwise.
Mount feels unstable after installation.	Mounting screws are loose or wall support is inadequate.	Check all mounting screws and re-tighten. Ensure the wall can support the weight.
VESA plate holes are too large for typical computer monitors.	Incorrect screws used or VESA plate design.	Ensure correct VESA screws are used. If issues persist, contact LogiLink support.

SPECIFICATIONS

Brand	LogiLink
Model Number	BP0169
Color	Black

Material	Aluminum
Mounting Type	Wall Mount
Movement Type	Tilt, Swivel, Rotate, Height Adjustment (Gas Spring)
Screen Size Compatibility	17 - 49 inches (flat and curved screens)
Maximum Load Capacity	20 kg (44 lbs)
VESA Compatibility	75x75 mm, 100x100 mm
Tilt Range	-20° to +50°
Swivel Range	-90° to +90° (at wall and monitor connection)
Rotation (VESA Plate)	-180° to +180°
Maximum Arm Extension	424 mm
Cable Management	Integrated

CONTACT AND SUPPORT

For further assistance, technical support, or warranty inquiries, please refer to the official LogiLink website or contact your retailer.

Manufacturer: 2direct GmbH

© 2025 LogiLink. All rights reserved.

ASK A QUESTION ABOUT THIS MANUAL

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page's manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. [Privacy details](#).

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question

Open the live page

<https://manuals.plus/asin/B0CHM9LK5S>

More documents and user manuals: <https://manuals.plus/>