

[Manuals.plus](#) /

› [BARNSMITH](#) /

› BARNSMITH 72x80 in 3-Panel White Primed Bypass Interior Sliding Closet Door Instruction Manual

BARNSMITH MYCD3P

BARNSMITH 72x80 in 3-Panel White Primed Bypass Interior Sliding Closet Door Instruction Manual

INTRODUCTION

This manual provides detailed instructions for the installation, operation, and maintenance of your BARNSMITH 72x80 inch 3-Panel White Primed Bypass Interior Sliding Closet Door. Please read all instructions carefully before beginning installation to ensure proper function and safety. Keep this manual for future reference.

PRODUCT FEATURES

- The sliding door comes primed and paintable, allowing for customization to match interior decor.
- Designed to fit a door opening of 72" x 80", with each door panel measuring 36 3/8" x 78 3/16" and a door thickness of 1 3/8".
- Features a stylish two-sided molded design suitable for various interior styles. Ideal for closets, pantries, and laundry rooms.
- Easy to install with preassembled doors, all required parts, and step-by-step detailed instructions included.
- Bypass closet door design moves in parallel between the opening and the wall, optimizing space compared to sliding barn doors and folding doors.

SPECIFICATIONS

BARNSMITH Sliding Closet Door Specifications

Attribute	Value
Brand	BARNSMITH
Model Number	MYCD3P
Color	White (Primed)
Material	HDF, Wood
Style	Modern
Number of Items	1
Included Components	Primed Sliding Closet Door, Top Track, Floor Guide, Rollers, Installation Hardware

Door Dimensions

Widely used



Laundry Room



Closet



Pantry



Living room

The image above displays the size chart for BARNSMITH sliding closet doors. For the 72x80 inch model, each panel measures 36 3/8 inches wide by 78 3/16 inches high, designed to fit a 72 inch by 80 inch opening. The door thickness for all sizes is 1 3/8 inches.

SETUP AND INSTALLATION

Before starting, ensure you have all components listed in the package. Refer to the detailed instructions included with your product for specific measurements and safety guidelines.

Included Components



BarnSmith Primed Sliding Closet Door



The door system includes a top track for smooth sliding, a floor guide to maintain alignment, and rollers for easy movement. All necessary hardware is provided.

Package Contents

PACKAGE LIST

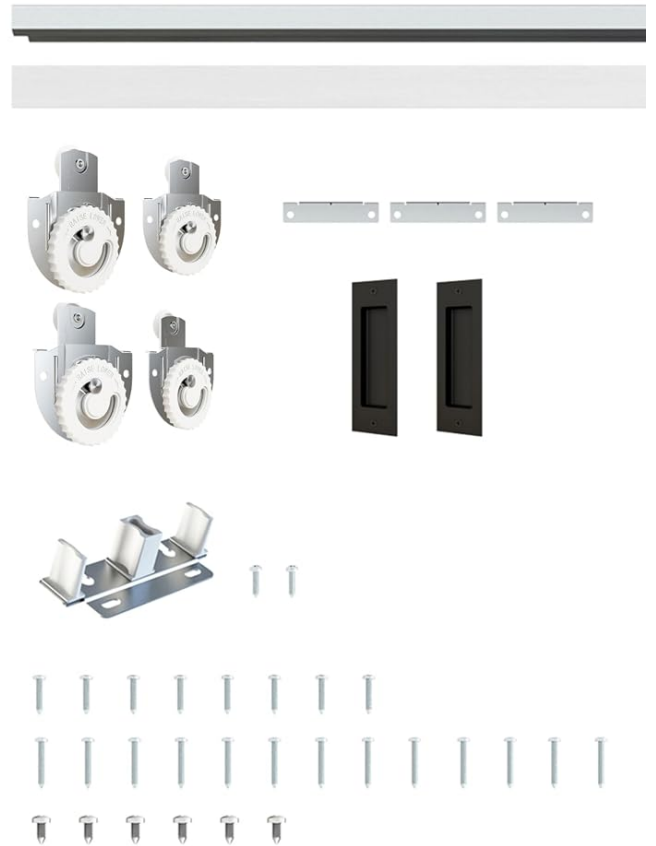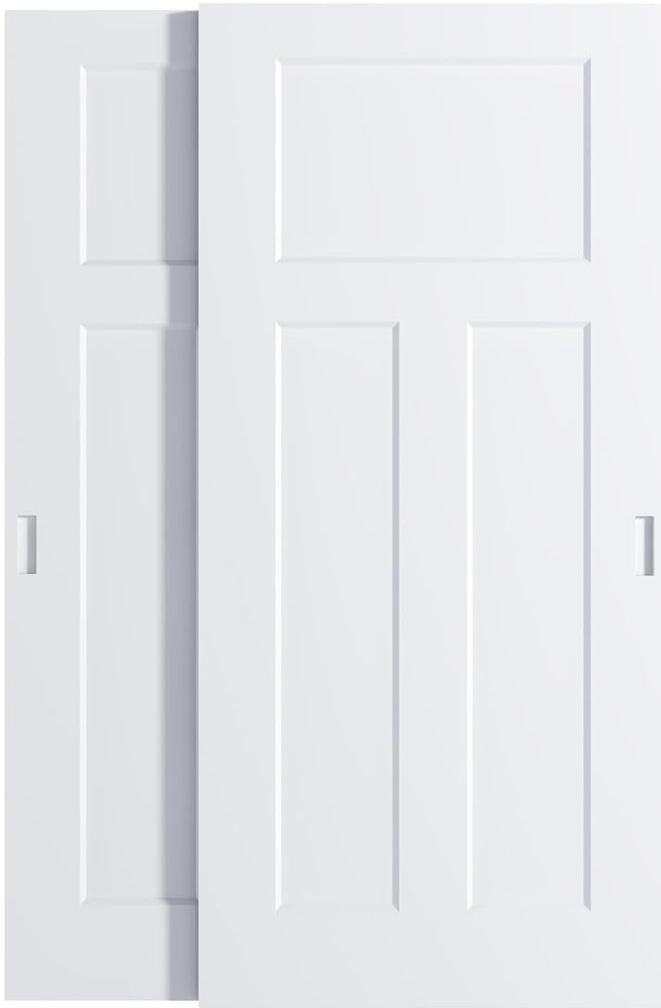

The package contains the preassembled door panels, the top track, floor guide, rollers, and all necessary screws and fasteners for installation.

Installation Steps

Easy installation



01 Install the top track



02 Install the floor guide



03 Install the Rollers



04 Hang the doors to the track

1. **Install the Top Track:** Secure the top track firmly above the door opening.
2. **Install the Floor Guide:** Position and secure the floor guide on the floor, ensuring it aligns with the top track.
3. **Install the Rollers:** Attach the rollers to the top edge of each door panel.
4. **Hang the Doors:** Carefully lift and engage the door panels onto the top track, then guide them into the floor guide.

Installation Video Guide

Your browser does not support the video tag.

This video demonstrates the process of installing the hardware kit for the BARNSMITH sliding closet door, providing a visual aid for the steps outlined above.

OPERATION

The BARNSMITH bypass sliding closet doors are designed for smooth and quiet operation. To open or close the doors, gently slide them along the top track. The floor guide ensures the doors remain aligned and stable during movement. The bypass design allows one door panel to slide in front of the other, providing access to either side of your closet space.


without requiring additional room for swinging doors.

MAINTENANCE

General Care

- Regularly clean the door panels with a soft, damp cloth to remove dust and dirt. Avoid abrasive cleaners that may damage the primed surface.
- Keep the top track and floor guide free of debris to ensure smooth sliding. Periodically vacuum or wipe down the tracks.
- Inspect rollers periodically for wear and tear. If doors become difficult to slide, check for obstructions in the track or worn rollers.

Painting and Customization

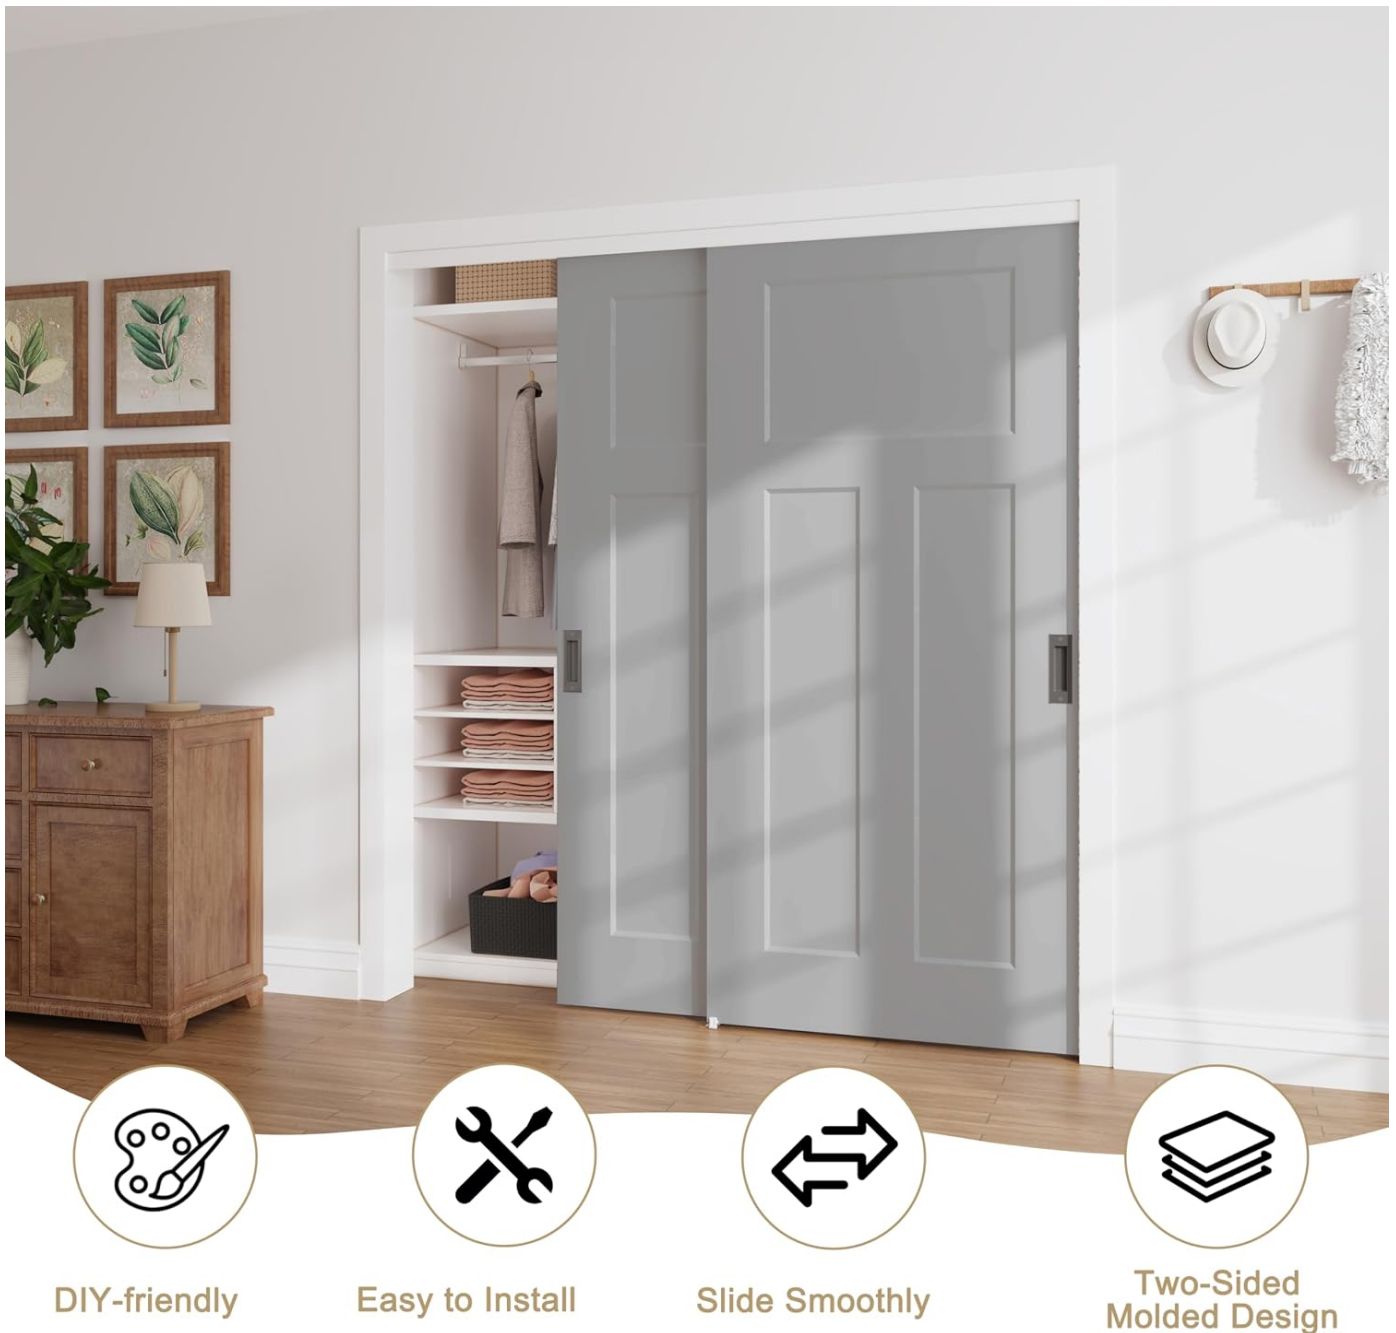

The doors are supplied primed, making them ready for painting. You can customize the color to match your room's aesthetic. Ensure the surface is clean and dry before applying paint. Follow paint manufacturer's instructions for best results.

Door Panel Construction

Two-sided Molded Design



The door panels feature a two-sided molded design with a core construction including HDF (High-Density Fiberboard), a honeycomb structure for stability, and solid pine wood framing for durability and structural integrity.

TROUBLESHOOTING

- **Doors not sliding smoothly:** Check the top track and floor guide for any obstructions (dust, debris). Ensure rollers are clean and properly seated in the track.
- **Doors wobble or derail:** Verify that the floor guide is securely installed and that the doors are correctly engaged with both the top track and floor guide. Check for any loose hardware.
- **Gap between doors or wall:** Ensure the door frame is plumb and square. Adjust rollers if necessary to achieve proper alignment.

WARRANTY AND SUPPORT

For any quality problems, missing parts, or installation issues, please contact BARNSMITH customer service. A professional customer service team is available to assist you.

ASK A QUESTION ABOUT THIS MANUAL

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page's manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. [Privacy details](#).

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question