Saved from manuals.plus.
Open the live page for links to other documents and user manuals.

BeeLinks rgb-spotlights-outdoor-4pcs

BeeLinks 12W RGBW LED Outdoor Spotlights (4-Pack) User Manual

Model: rgb-spotlights-outdoor-4pcs

Introduction

Thank you for choosing the BeeLinks 12W RGBW LED Outdoor Spotlights. This manual provides essential information for the safe and efficient installation, operation, and maintenance of your new lighting system. Please read these instructions thoroughly before use and retain them for future reference.

Safety Information

WARNING: Failure to follow these safety instructions may result in fire, electric shock, injury, or damage to the product.

- Always unplug the lights during severe weather conditions, such as heavy rain, snow, or thunderstorms.
- Be cautious of the 5ft power cord to prevent tripping hazards. Ensure the cord is routed safely and securely.
- Use mounting hardware carefully during installation to avoid personal injury or damage to property.
- Keep the spotlights away from flammable materials.
- Do not allow children to play on or near the lighting display.
- Ensure the power outlet is suitable for outdoor use and protected from moisture.

Package Contents

Verify that all components are present in your package:

- RGBW Spotlights x4
- Remote Control x1
- Mounting Hardware (stakes and screws)
- User Manual x1



Image: Contents of the BeeLinks 12W RGBW LED Outdoor Spotlights 4-pack, including four spotlights and one remote control.

Specifications

Feature	Specification
Item Weight	2.51 Pounds
Frame Material	Aluminum
Light Color	Multicolor (RGBW)
Number of Light Sources	4
Voltage	120 Volts
Wattage	12 Watts per spotlight
Product Dimensions	1 x 1 x 1 inches (each spotlight)

IP Rating	IP65 Waterproof
Special Features	16 Color Changing (including Warm White), 3 Brightness Levels, 4 Dynamic Color Changing Modes (Flash, Strobe, Fade, Smooth), Plug-In
Power Source	Corded Electric

INSTALLATION

Your BeeLinks spotlights offer two primary installation methods: ground insertion or wall mounting.

1. Attaching the Lamp Head to the Stake

1. Use a screwdriver to loosen the screw on the stake.
2. Attach the lamp head to the stake, aligning the bracket with the screw hole.
3. Use the screwdriver to tighten the screw securely.



Image: Steps for assembling the spotlight head onto the ground stake.

2. Ground Insertion

1. Once the lamp head is attached to the stake, select a desired location in your yard or garden.
2. Gently push the stake into the ground until it is firm and stable. Ensure the spotlight is angled as desired.
3. Connect the 3-prong plug to a suitable outdoor 120V power outlet.

3. Wall Mounting

1. Remove the stake from the spotlight if it is attached.
2. Choose a suitable wall location. Mark the positions for the mounting screws using the spotlight's bracket as a

template.

3. Drill pilot holes if necessary and secure the spotlight to the wall using the provided mounting hardware.
4. Adjust the angle of the spotlight as needed.
5. Connect the 3-prong plug to a suitable outdoor 120V power outlet.

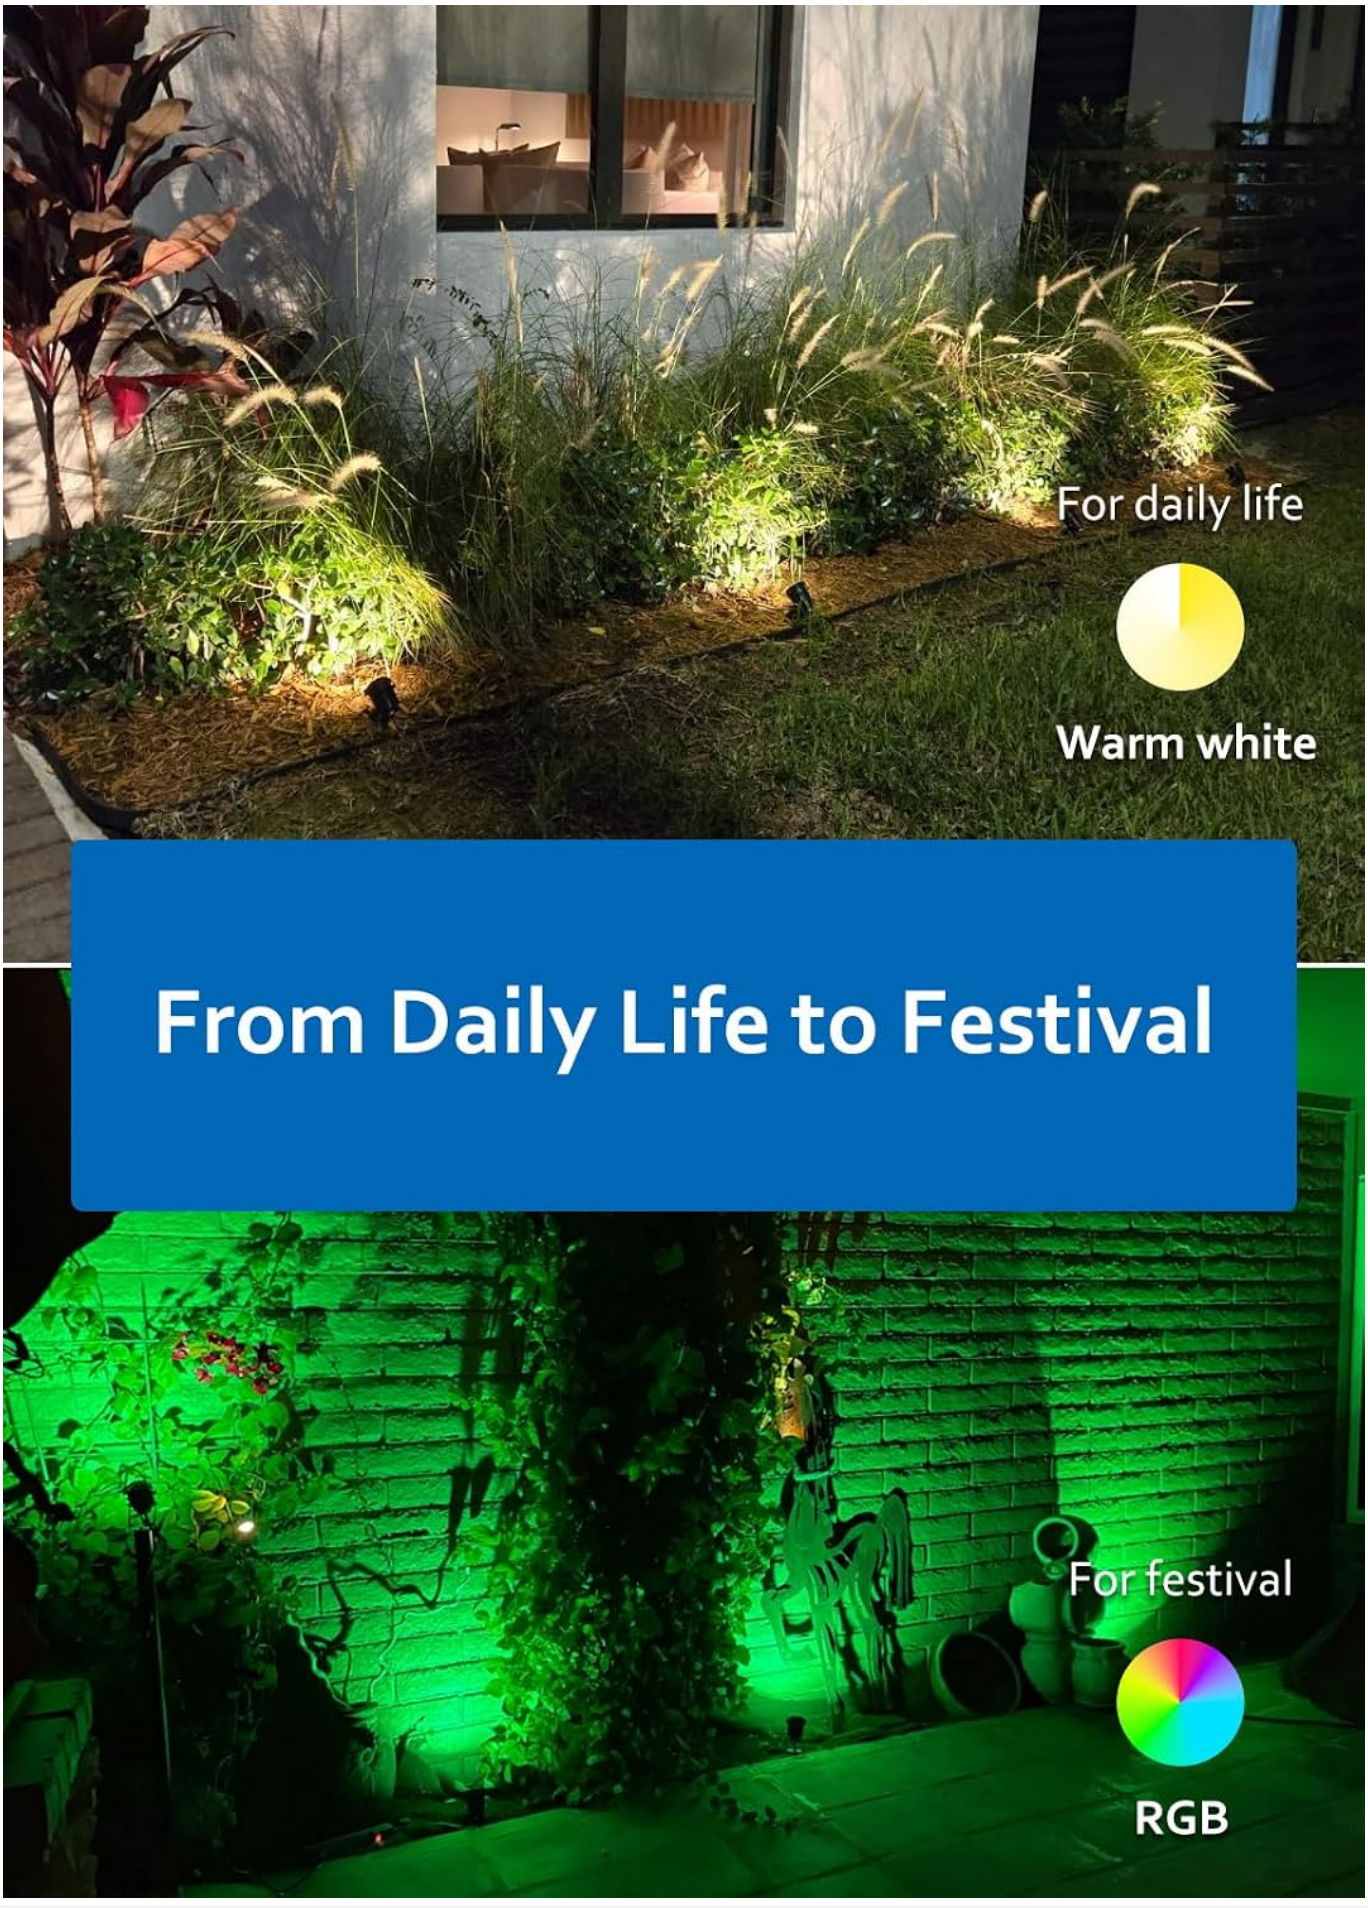


Image: Examples of wall-mounted and ground-inserted spotlight installations.

Operation

The BeeLinks RGBW LED Spotlights are controlled using the included RF remote control.

1. Remote Control Overview



Image: BeeLinks Spotlight Remote Control Layout.

- **ON/OFF Buttons:** Power the lights on or off.
- **Brightness Adjustment:** Adjust the light intensity (3 levels available).
- **16 Static Colors:** Select from a palette of 16 individual colors, including warm white.
- **4 Dynamic Modes:** Choose from Flash, Strobe, Fade, or Smooth effects for dynamic lighting.

2. Basic Operation

1. Plug the spotlights into a 120V power outlet.

2. Press the "ON" button on the remote control to turn on the lights.
3. Select your desired color from the 16 static color buttons or choose a dynamic mode.
4. Adjust brightness using the brightness control buttons.
5. The lights feature a memory function, retaining the last setting when turned off and on again.

3. Setting Individual Light Colors (for multiple lights)

If you wish to set different colors for each spotlight in a multi-pack, follow these steps:

1. Plug in only one spotlight and set its desired color using the remote. Then, unplug it.
2. Plug in another spotlight and set its desired color. Then, unplug it.
3. Repeat this process for all spotlights you wish to customize.
4. Once all spotlights have their individual colors set, plug them all back in. They will retain their programmed colors.



Image: Method for setting unique colors on multiple spotlights.

Maintenance

Proper maintenance ensures the longevity and optimal performance of your spotlights.

- **Cleaning:** Periodically wipe the spotlight lenses and housing with a soft, damp cloth to remove dirt and debris. Do not use abrasive cleaners or solvents.
- **Cable Inspection:** Regularly inspect the power cords for any signs of damage, fraying, or wear. If damage is found, discontinue use and replace the unit.
- **Weather Resistance:** These spotlights are IP65 rated for water and dust resistance. While designed to withstand various weather conditions, ensure connections are secure and avoid submerging the units in water.



Image: Spotlight demonstrating IP65 weather resistance.

TROUBLESHOOTING

If you encounter issues with your BeeLinks spotlights, refer to the following common problems and solutions:

Problem	Possible Cause	Solution
Light does not turn on.	No power, faulty connection, remote battery low.	Check power outlet, ensure plug is fully inserted. Replace remote battery if necessary.
Remote control not working.	Remote battery depleted, obstruction, out of range.	Replace remote battery. Ensure clear line of sight to the lights. Operate within the 49ft range.
One light does not change color with others.	Remote signal not received by that specific light.	Point the remote directly at the affected light and press the desired color/mode button again. Ensure no obstructions.
Lights flicker or behave erratically.	Unstable power supply, loose connection.	Check power source stability. Ensure all connections are tight.

Warranty and Support

BeeLinks provides a **365-day money-back or free-replacement warranty** for this product. If you are not satisfied for any reason, please contact us directly.

How to Contact Support:

- Navigate to "My Orders" on the platform where you purchased the product.
- Locate your order for the BeeLinks 12W RGBW LED Outdoor Spotlights.
- Click on "Contact the Seller."

Our professional and friendly customer service team is available to assist you with any questions or concerns.

Ask a question about this manual

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page's manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. Privacy details.

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question

Open the live page

https://manuals.plus/asin/B0CJNQTKBY

More documents and user manuals: **https://manuals.plus/**