Saved from manuals.plus.
Open the live page for links to other documents and user manuals.

Hugolog HU-PWR6P-W-5G

Hugolog 3K 5MP Indoor Pan/Tilt Security Camera User Manual

Model: HU-PWR6P-W-5G

Brand: Hugolog

1. Introduction

Thank you for choosing the Hugolog 3K 5MP Indoor Pan/Tilt Security Camera. This camera is designed to provide comprehensive indoor surveillance with advanced features such as 3K 5MP resolution, dual-band Wi-Fi connectivity (2.4 GHz/5 GHz), auto-focus, starlight color night vision, and AI-powered human and pet detection. This manual will guide you through the setup, operation, and maintenance of your camera to ensure optimal performance.



Image 1.1: Hugolog 3K 5MP Indoor Pan/Tilt Security Camera.

2. What's in the Box

Please check the package contents upon unboxing:

- Hugolog 3K 5MP Indoor Pan/Tilt Security Camera
- Power Adapter
- USB Cable
- Mounting Accessories (Screws, Wall Plugs)
- Quick Start Guide

3. Setup

3.1 Powering On

1. Connect the USB cable to the camera's power port.
2. Plug the power adapter into a standard electrical outlet.
3. The camera will power on, and the indicator light will begin to flash, indicating it is ready for setup.

3.2 App Download and Account Creation

1. Download the **Hugolog Connect** app from the Google Play Store (for Android) or the Apple App Store (for iOS).
2. Open the app and follow the on-screen instructions to create a new account or log in if you already have one.

3.3 Wi-Fi Connection

1. In the Hugolog Connect app, tap the "+" icon to add a new device.
2. Select your camera model and follow the in-app instructions to connect it to your Wi-Fi network.
3. The camera supports both 2.4 GHz and 5 GHz Wi-Fi bands for enhanced network performance. Ensure your router is within range.



Image 3.3: Illustration of dual-band (2.4G & 5G) Wi-Fi coverage for the camera.

3.4 Mounting the Camera

The camera can be placed on a flat surface or mounted to a wall or ceiling using the provided accessories.

1. Choose a location that provides the desired viewing angle and is within Wi-Fi range.
2. If mounting, use the included template to mark drill holes. Drill holes and insert wall plugs if necessary.

3. Secure the mounting bracket with screws.
4. Attach the camera to the mounting bracket.

4. Operating the Camera

4.1 Live View

Access the live feed from your camera anytime, anywhere through the Hugolog Connect app. You can view up to 16 live feeds simultaneously through a web browser.

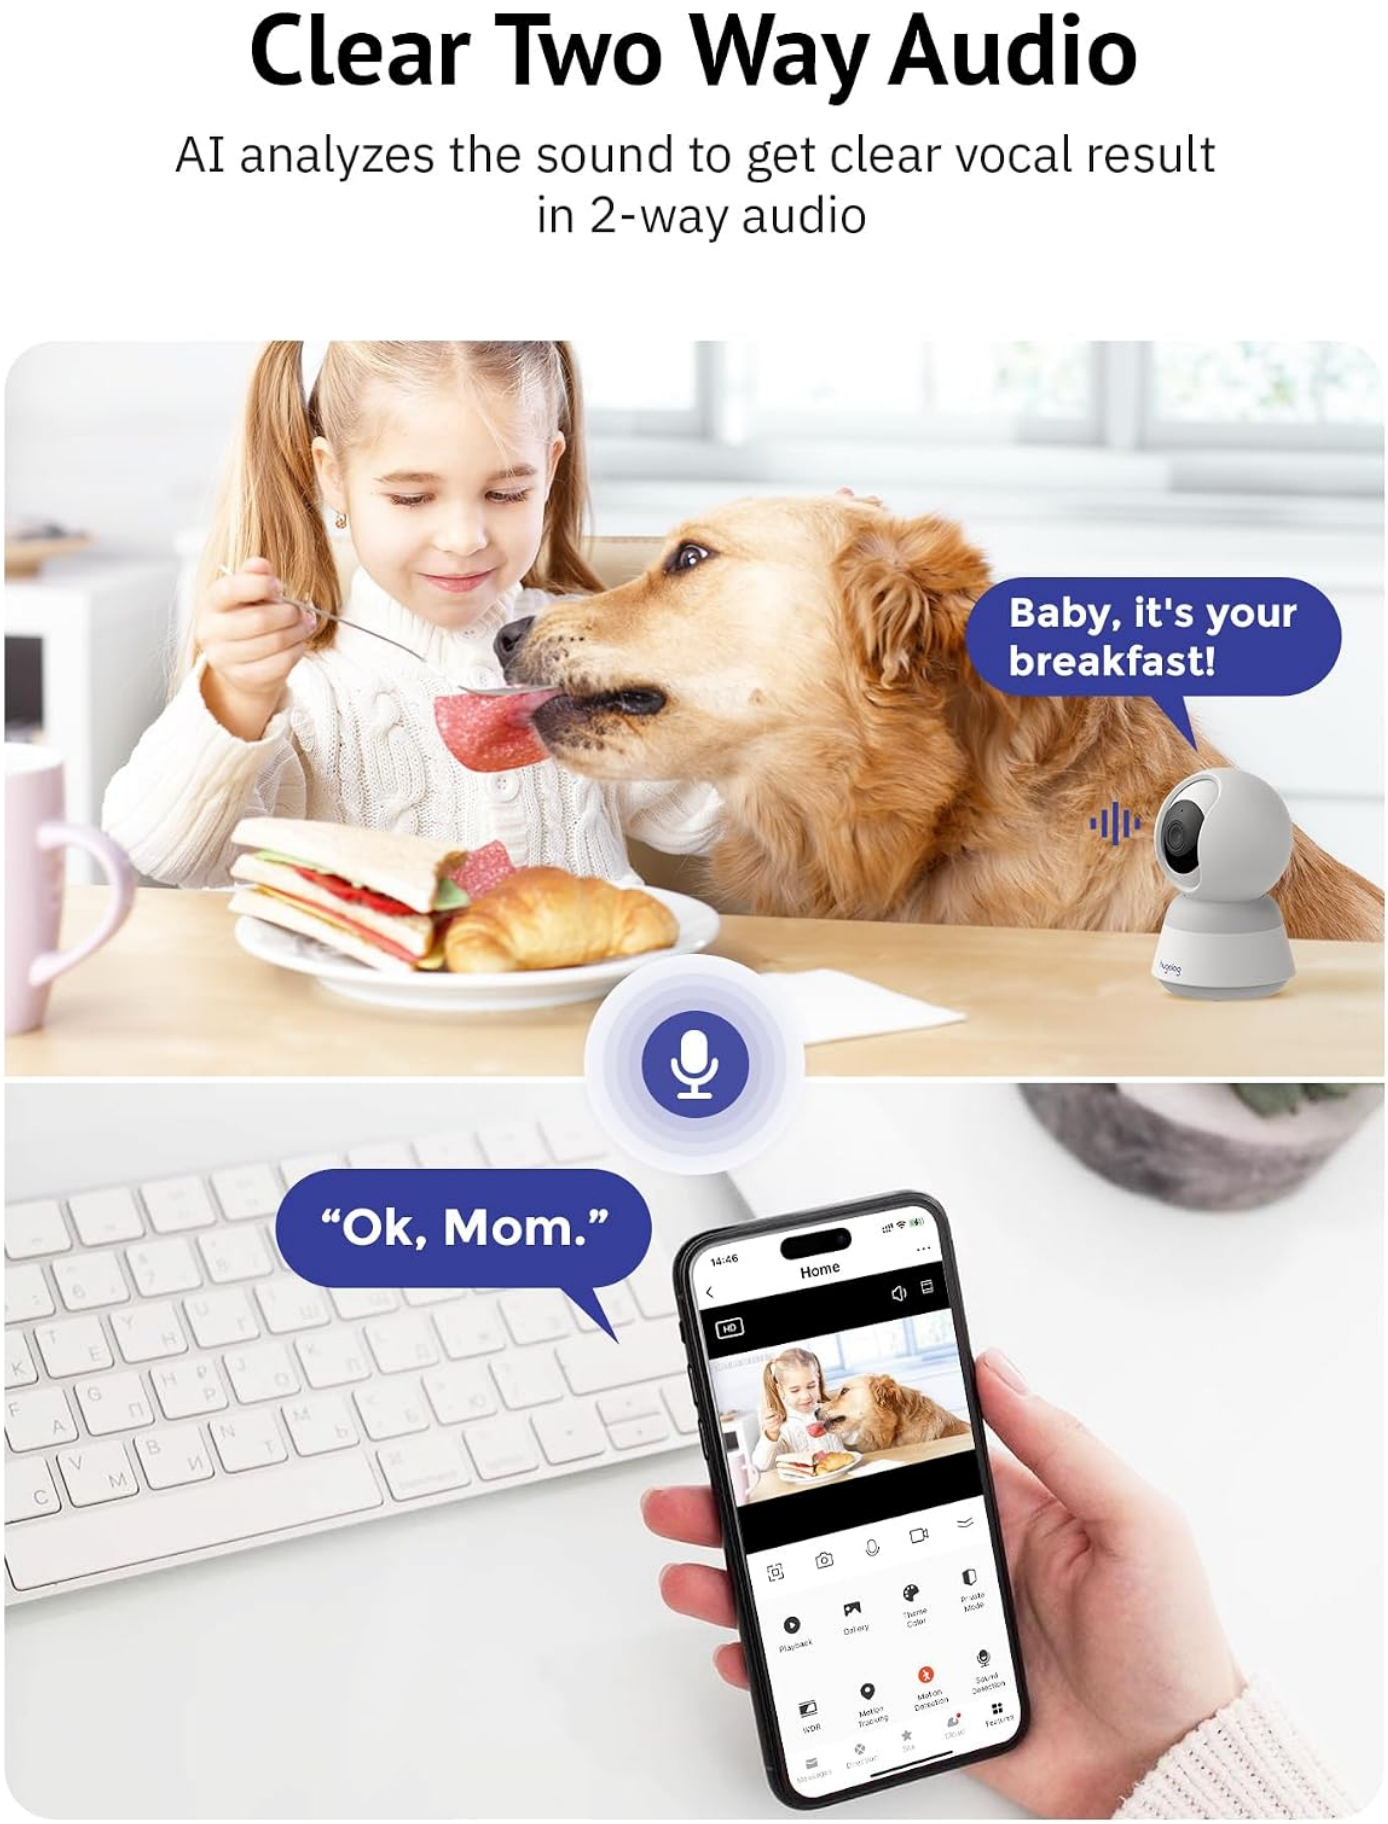


Image 4.1: Multiple users and cameras can be viewed simultaneously.

Your browser does not support the video tag.

Video 4.1: Demonstration of the camera's functionality as a baby monitor.

4.2 Pan, Tilt, and Zoom

Control the camera's viewing angle directly from the app. The camera offers 355° pan and 90° tilt capabilities. Utilize the 3X digital zoom to get a closer look at details. The auto-focus feature ensures clear images.

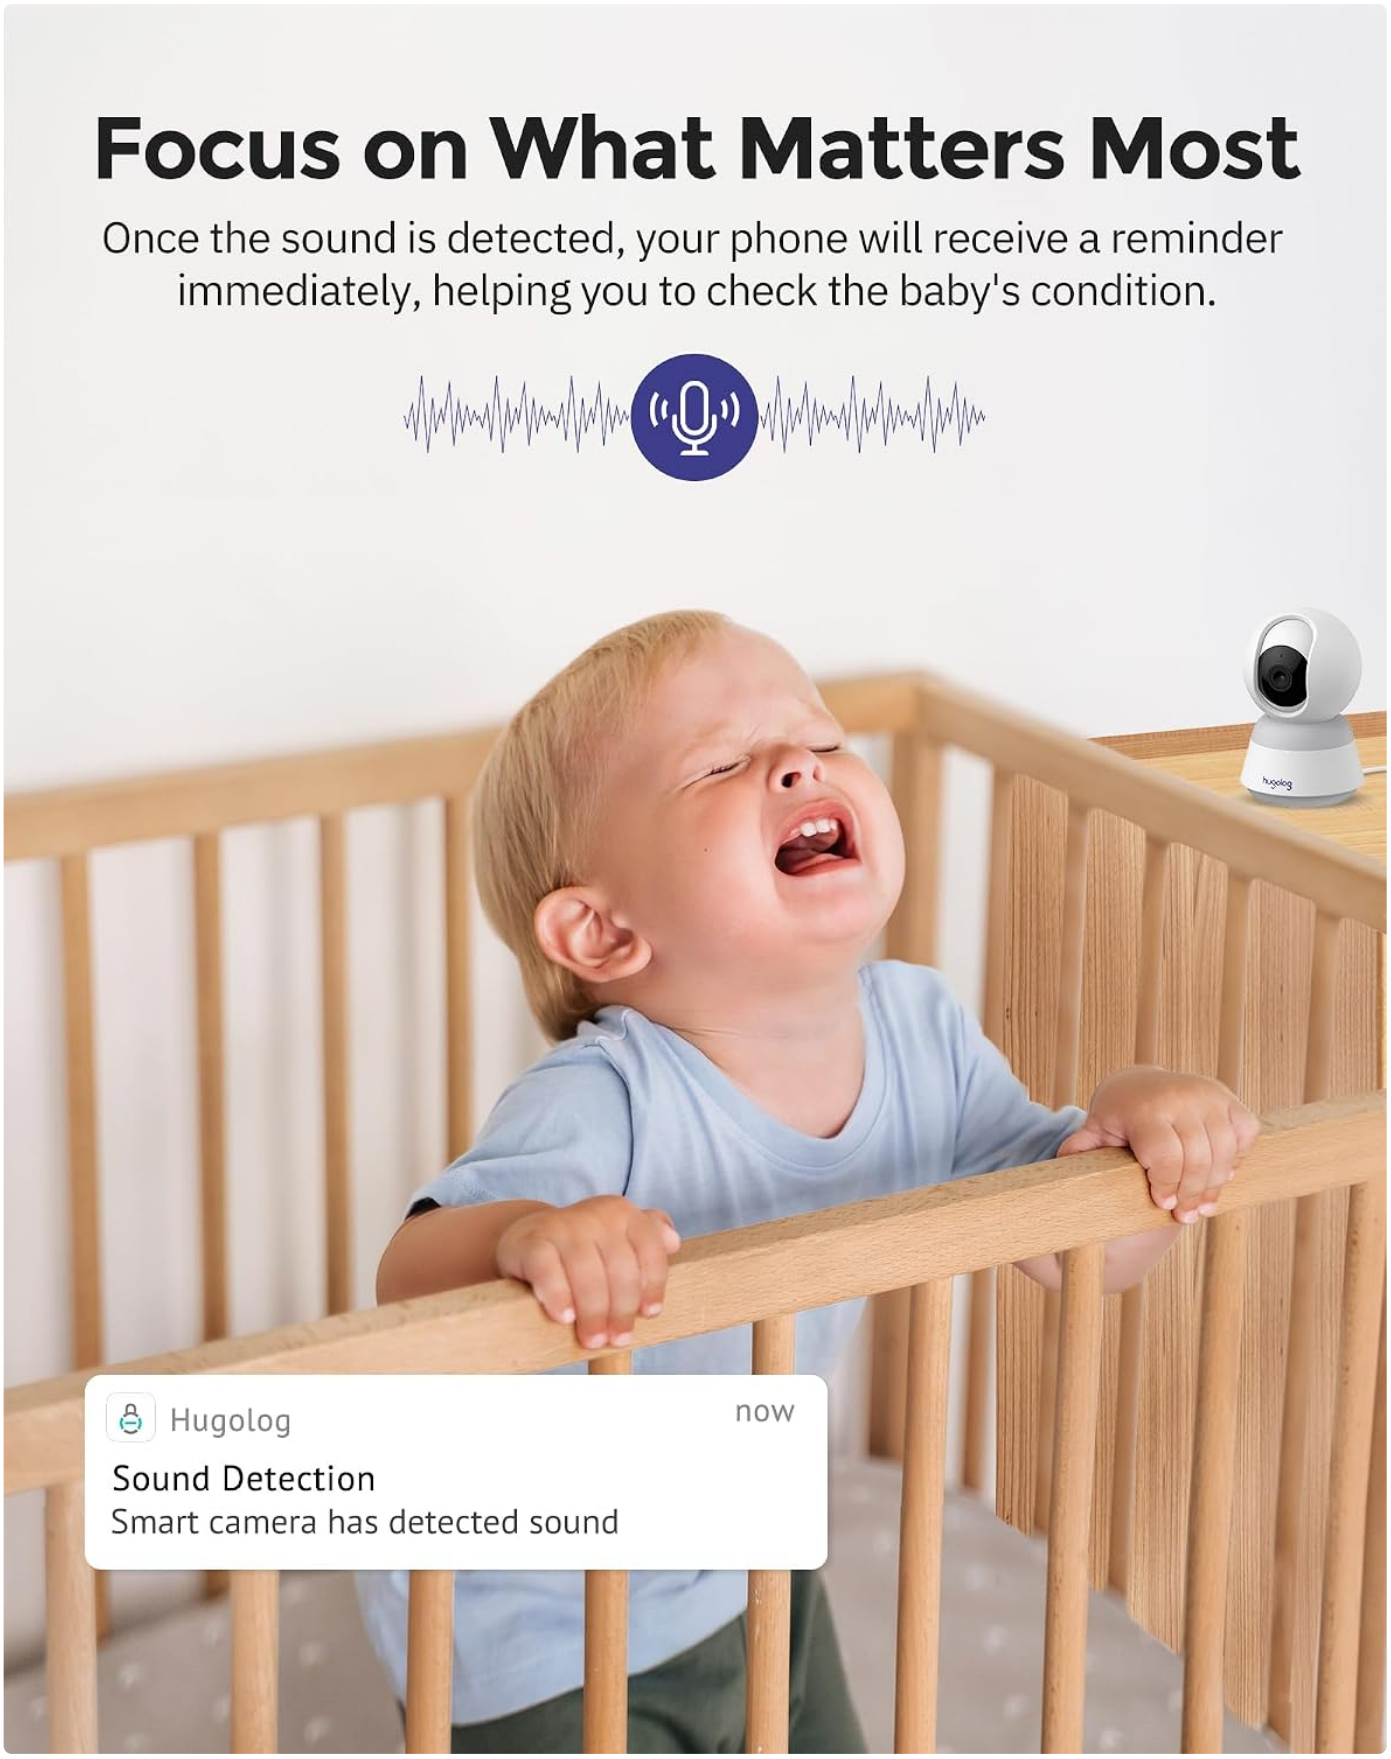


Image 4.2: High-resolution capture with zoom capabilities.

Your browser does not support the video tag.

Video 4.2: A quick overview of the camera's features and pan/tilt functionality.

4.3 Smart Motion and Sound Detection & Instant Notification

The camera features advanced AI for human and pet detection, reducing false alerts. It also detects crying babies. When motion, human presence, or a crying baby is detected, the camera records and sends instant push notifications to your phone.

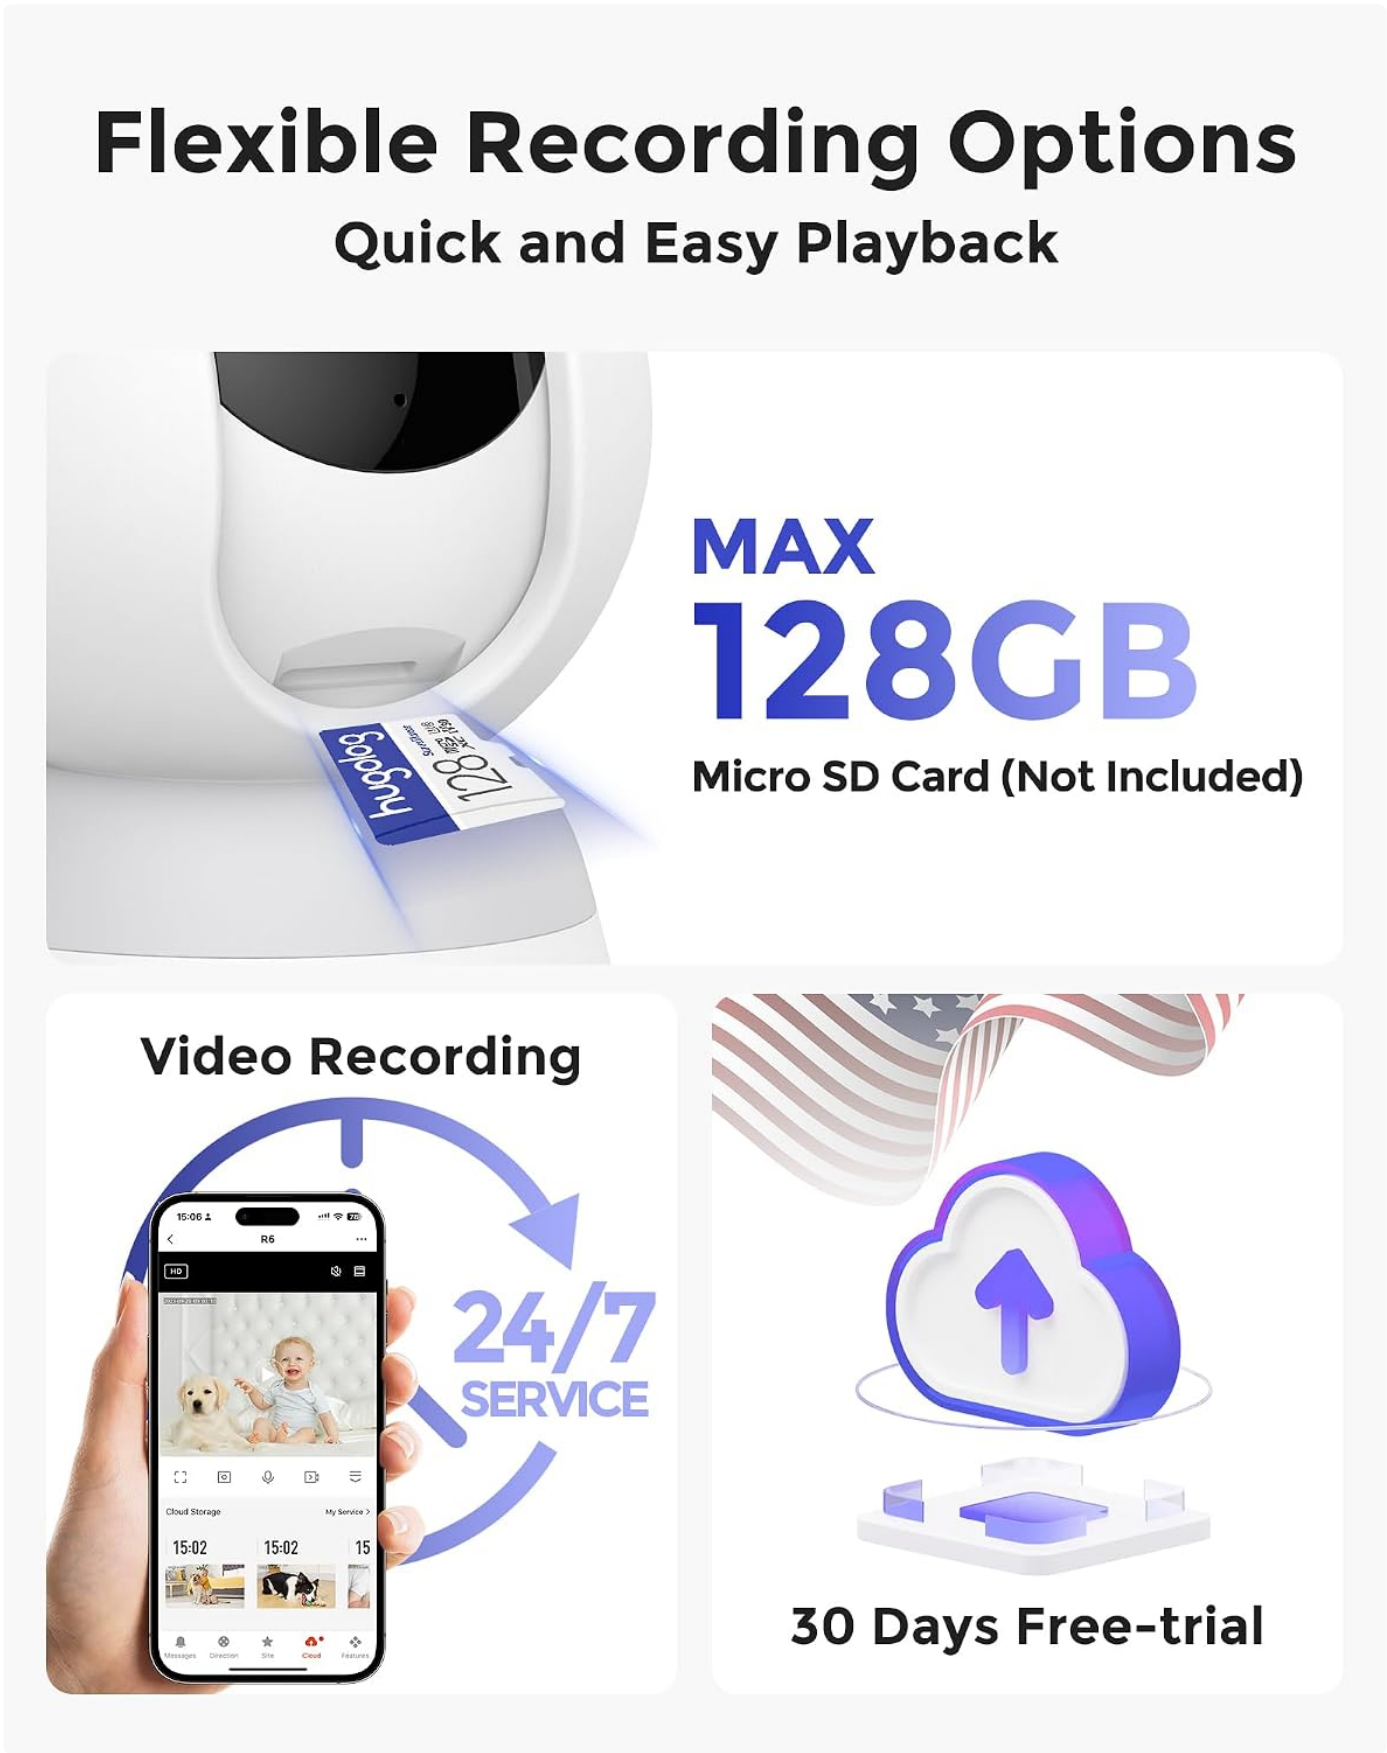


Image 4.3: Auto-tracking feature following a person and a pet.

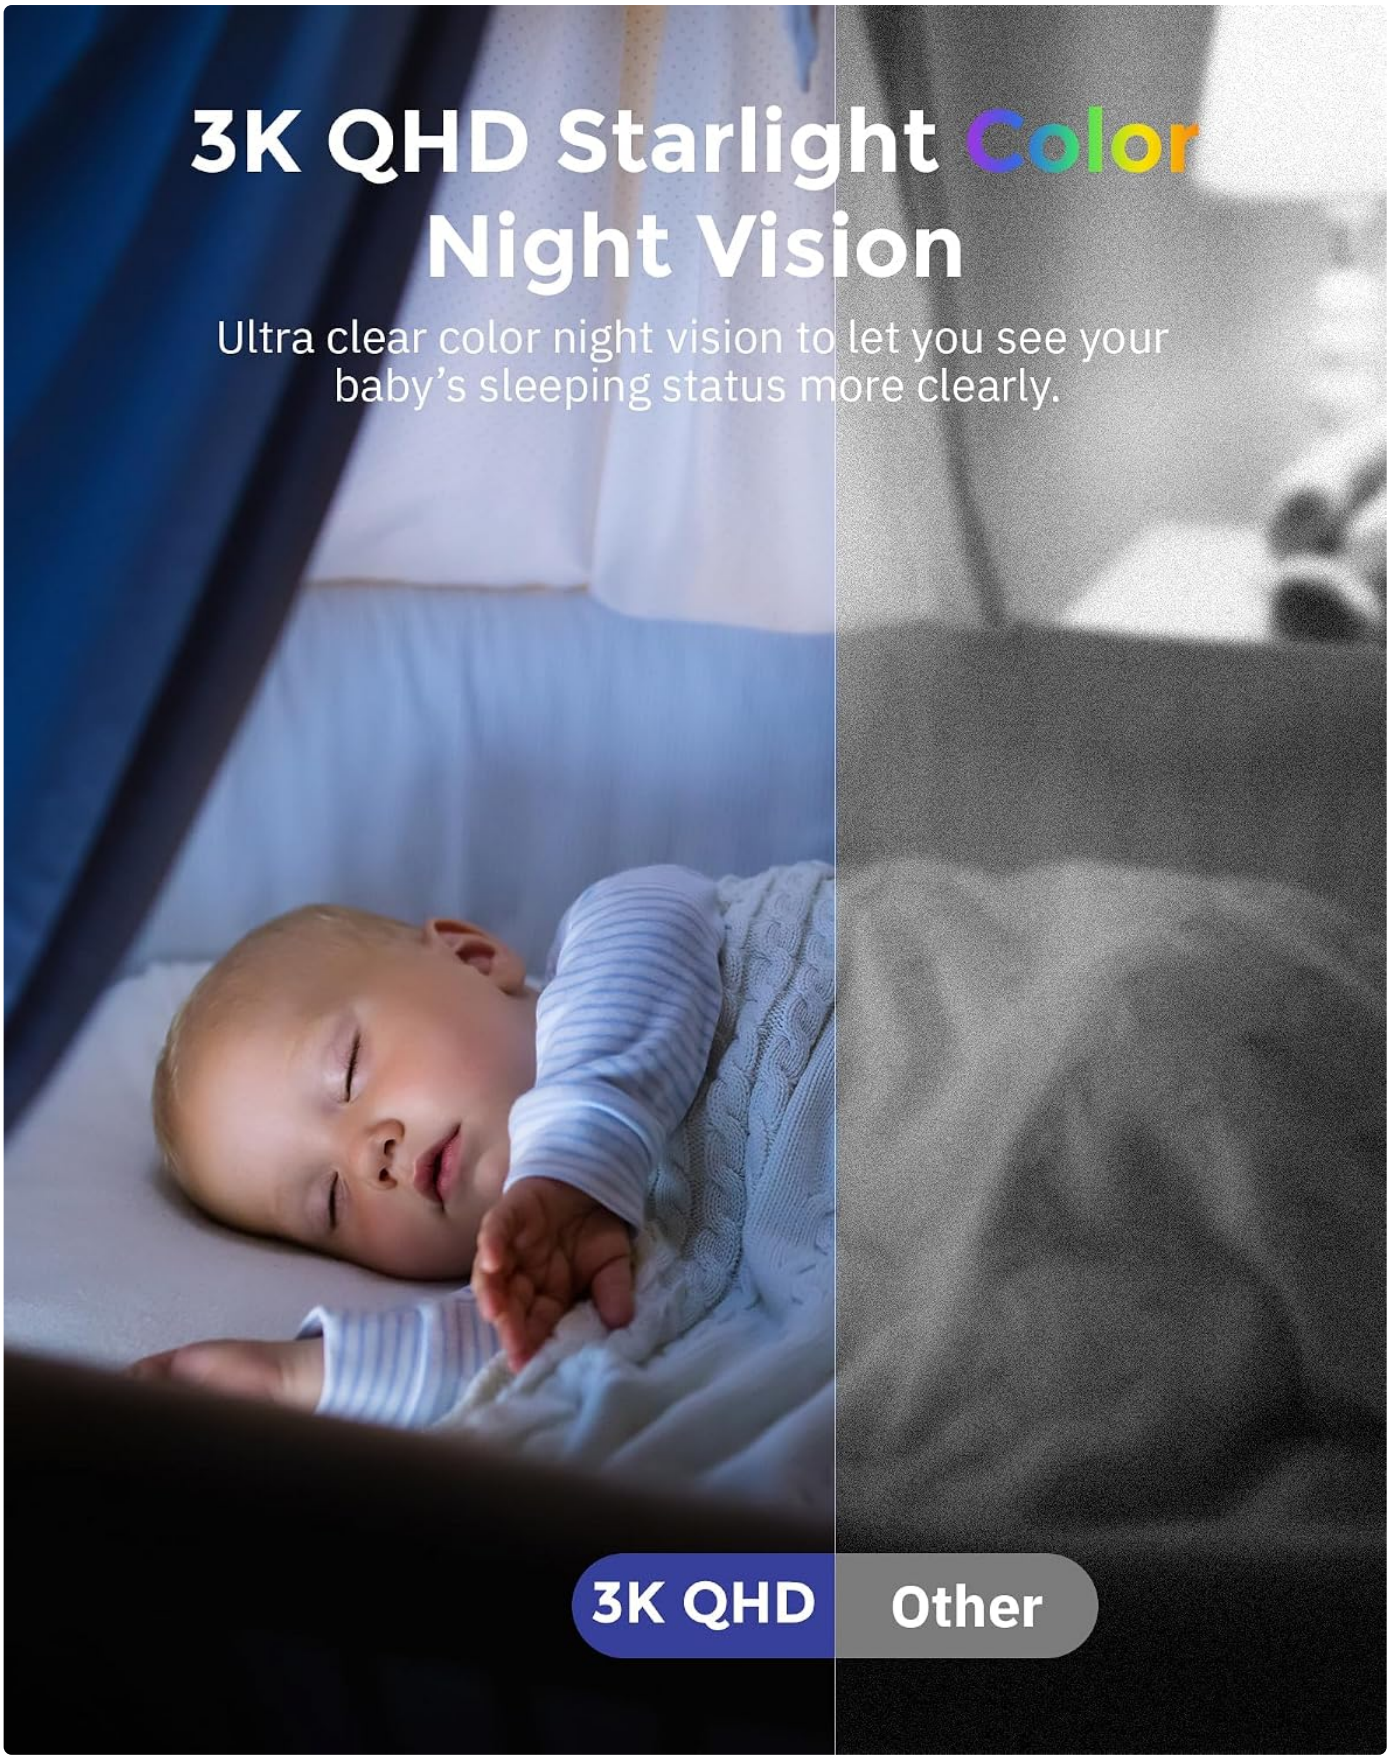


Image 4.4: Example of a sound detection notification for a crying baby.

4.4 Two-Way Audio

Engage in crystal-clear two-way communication through the camera. The advanced sound enhancement and noise reduction features ensure clear vocal results, allowing you to speak to family members or pets remotely.



Image 4.5: Two-way audio in use, showing interaction with a child and pet.

4.5 Starlight Color Night Vision

The camera's Starlight Sensor and f/1.4 aperture provide superior color night vision, capturing clear footage even in low-light conditions, offering 60 times better color night vision than standard cameras.

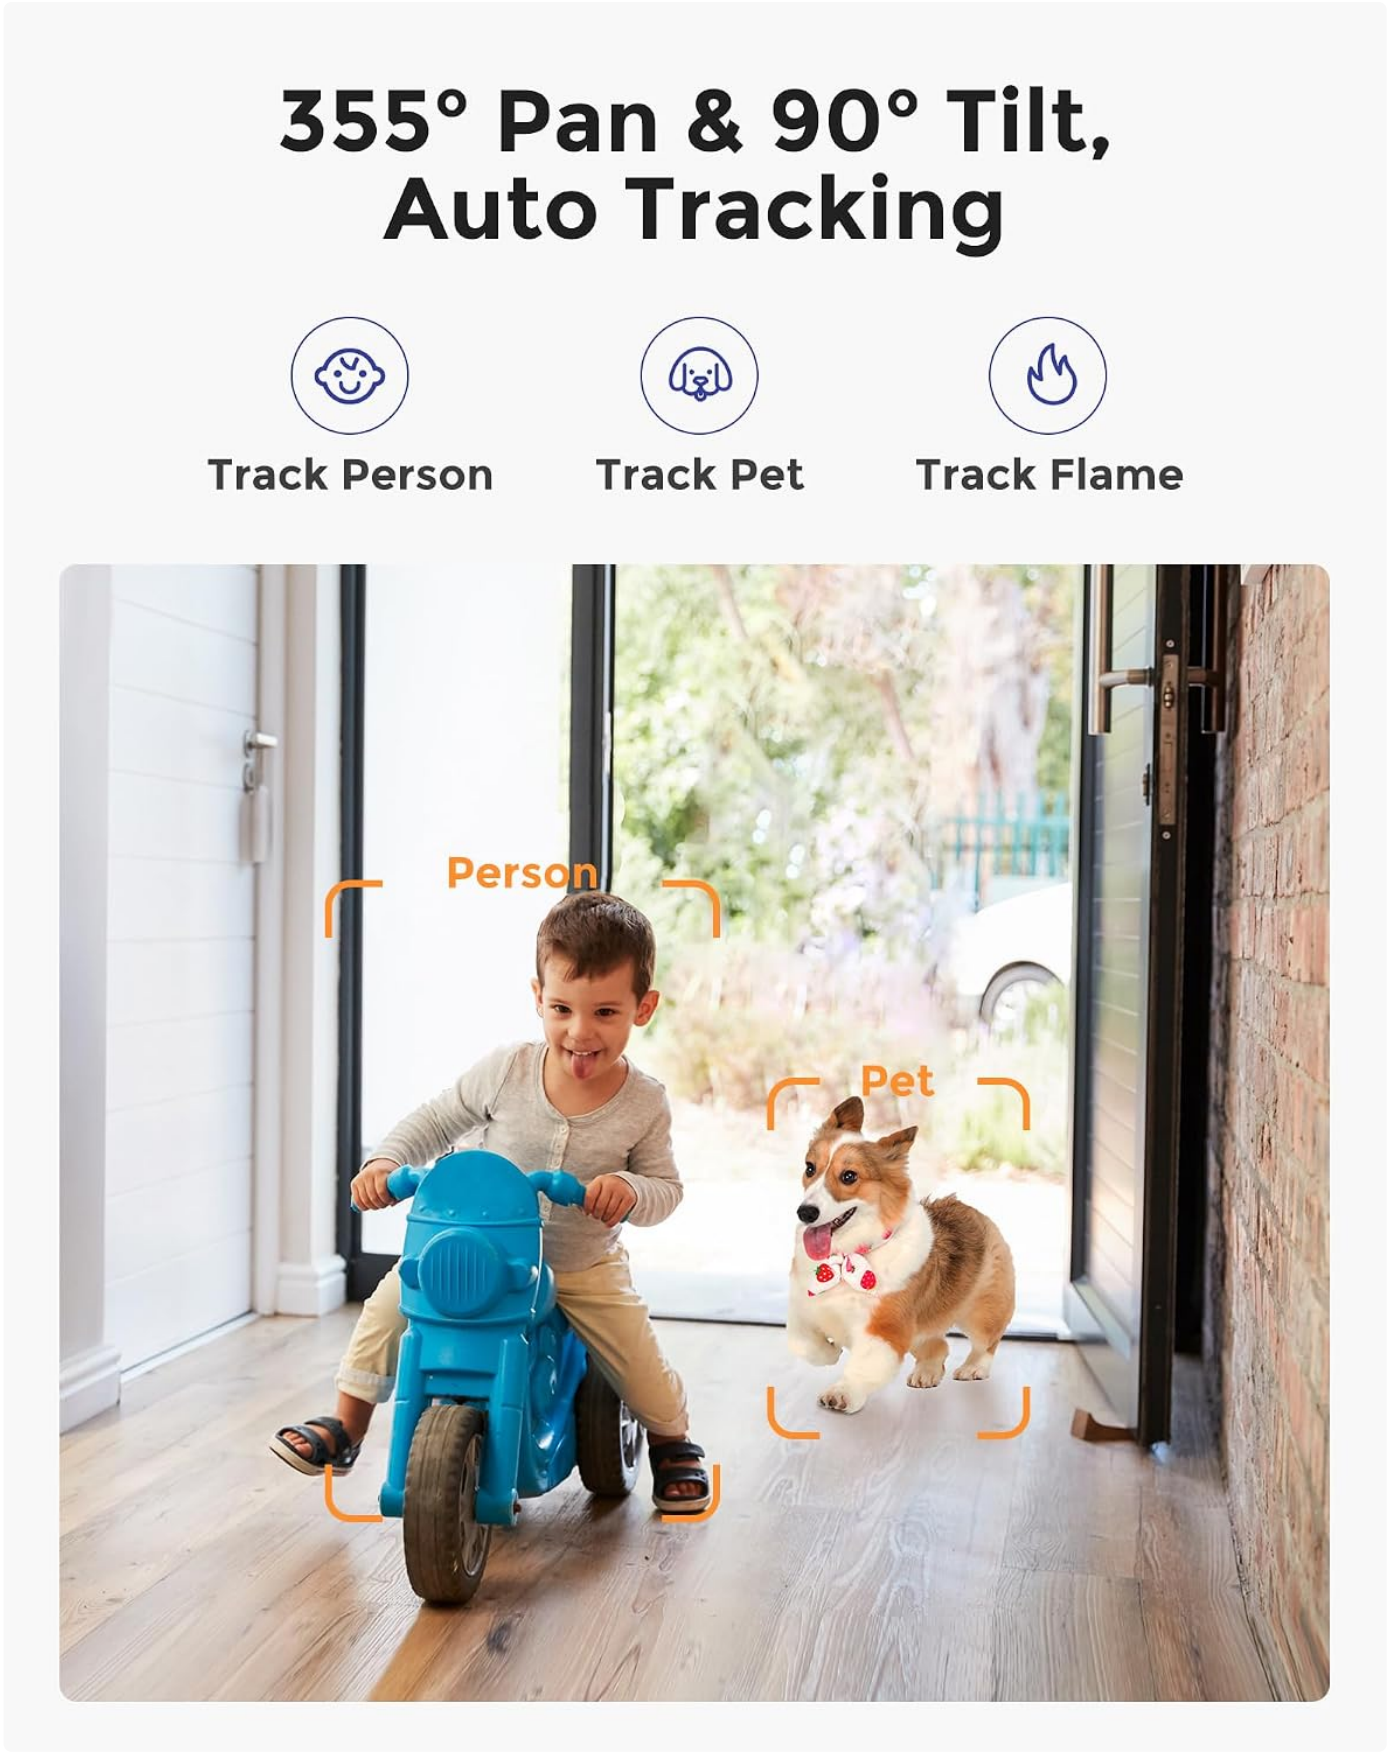


Image 4.6: Comparison of Starlight Color Night Vision with standard night vision.

4.6 Recording Options

Your camera supports two recording options:

- **Micro SD Card Storage:** A built-in Micro-SD slot supports cards up to 128GB (card not included) for local storage of footage.

- **US Cloud Storage:** Encrypted cloud storage is available in the US, ensuring your footage is securely stored and accessible. A 30-day free trial may be included.



Image 4.7: Overview of Micro SD card and cloud storage options.

4.7 Works with Alexa

Integrate your Hugolog camera with Amazon Alexa. Use voice commands to view live feeds on compatible Alexa-enabled devices. For example, say "Alexa, show me the baby room."

4.8 Sleep Mode

Activate Sleep Mode via the Hugolog App or by manually rotating the camera lens down to disable monitoring when privacy is desired.

5. Maintenance

- **Cleaning:** Gently wipe the camera lens and body with a soft, dry cloth. Avoid using harsh chemicals or abrasive cleaners.
- **Software Updates:** Regularly check the Hugolog Connect app for firmware updates to ensure your camera has the latest features and security enhancements.
- **Placement:** Ensure the camera is placed in a stable location to prevent accidental falls. Avoid direct sunlight or heat sources that could affect performance.

6. Troubleshooting

Issue	Possible Solution
Camera not connecting to Wi-Fi	◦ Ensure your Wi-Fi network is 2.4 GHz or 5 GHz. ◦ Check Wi-Fi password accuracy. ◦ Move the camera closer to the router. ◦ Restart the camera and router.
Poor image quality	◦ Clean the camera lens. ◦ Ensure adequate lighting for optimal performance. ◦ Check your internet connection speed.
No notifications received	◦ Verify notification settings in the Hugolog Connect app. ◦ Check your phone's notification settings for the app. ◦ Ensure motion/sound detection is enabled.
Two-way audio not working	◦ Check microphone and speaker permissions for the app on your phone. ◦ Ensure the camera's microphone and speaker are not obstructed.

Your browser does not support the video tag.

Video 6.1: A user review demonstrating the camera's features and app interface.

7. Specifications

Feature	Detail

Feature	Detail
Model Name	R6
Model Number	HU-PWR6P-W-5G
Recommended Uses	Indoor Security
Connectivity Technology	Wi-Fi (2.4 GHz & 5 GHz)
Indoor/Outdoor Usage	Indoor
Compatible Devices	Amazon Alexa
Controller Type	Amazon Alexa, App
Mount Type	Stick Up
Color	White
Form Factor	Dome
Alert Type	Audio and Motion
Effective Still Resolution	5 MP
Video Capture Resolution	5 MP
Focus Type	Auto Focus
Zoom Type	Optical Zoom (Digital Zoom up to 3X)
Photo Sensor Technology	CMOS
Item Dimensions	3.74 x 3.74 x 6.99 inches
Power Source	Corded Electric
Wattage	8 watts
Night Vision	Starlight Color Night Vision
Memory Storage Capacity	Up to 128 GB (Micro SD Card)
UPC	192728014152

8. Warranty and Support

Hugolog products are designed for reliability and performance. For warranty information, please refer to the documentation included with your purchase or visit the official Hugolog website. For technical support, product inquiries, or assistance with setup and troubleshooting, please contact Hugolog customer service.
You can typically find support contact information within the Hugolog Connect app or on the Hugolog official website.

hugolog
— SECURITY —

Image 8.1: Hugolog Brand Logo.

© 2023 Hugolog. All rights reserved.
For the latest information and updates, please visit www.hugolog.com.

Ask a question about this manual

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page's manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. Privacy details.

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question

Open the live page

https://manuals.plus/asin/B0CKN52RPQ

More documents and user manuals: **https://manuals.plus/**