Saved from manuals.plus.
Open the live page for links to other documents and user manuals.

Digitek DSL-600 RGB

Digitek DSL-600 RGB LED Video Stick Light User Manual

Model: DSL-600 RGB | Brand: Digitek

1. Introduction

Thank you for choosing the Digitek DSL-600 RGB LED Video Stick Light. This versatile lighting tool is designed for professional video, vlogging, and photography, offering a wide range of lighting options from bi-color to full RGB spectrum. Please read this manual carefully to ensure proper use, optimal performance, and longevity of your device.



Image: The Digitek DSL-600 RGB LED Video Stick Light, shown with its detachable barndoors and included carry bag.

2. Package Contents

Please verify that all items listed below are included in your package:

- Light Body (1x)
- Type-C Charging Cable (1x)
- Removable Barndoor (1x)
- Carry Bag (1x)
- 9V/2A Adapter (1x)



Image: An illustration and photo showing all components included in the Digitek DSL-600 RGB package.

3. Product Features

The Digitek DSL-600 RGB LED Video Stick Light offers a comprehensive set of features for diverse lighting needs:

- **High Power Output:** Equipped with 35W Bi-Color and 30W RGB LEDs for strong, versatile illumination.
- **Adjustable Dual Color Temperature:** Covers a wide range from 2700K (warm) to 7500K (cool) along with a full RGB spectrum.
- **Ultra-Bright Illumination:** Produces up to 3500 lumens with smooth 1–100% brightness adjustment.
- **14 Built-in Special Effects:** Includes presets like TV flicker, candle, fireworks, police siren, SOS, thunder, campfire, and more.
- **Dynamic Music Sync Mode:** Built-in pickup allows the light to react to music beats and sound.
- **Professional-Grade CRI >95:** Ensures natural skin tones and true-to-life colors.
- **Rechargeable Long-Lasting Battery:** Runs on 4x 18650 Li-ion batteries (6400mAh) with a 5A protection board.

- **Fast & Convenient Charging:** Type-C 9V/2A charging port with adapter included.
- **Flexible Mounting Options:** 1/4" female thread for tripod/light stand mounting and ergonomic handle for handheld use.
- **Detachable Barndoors:** For precise control over light spill and direction.
- **App Control:** Convenient and customizable illumination options via a dedicated mobile application.

Feature Highlights:

Dual Spectrum Lighting



Image: The light wand features both bi-color (2700K-7500K) and RGB capabilities on different sides.

Effortless Control



Image: A simple knob and LCD display allow for easy monitoring and adjustment of brightness, CCT, and power.

App Controlled Lighting



Image: The DSL-600 RGB can be controlled via a mobile app for convenient and customizable illumination. Scan the QR code to download the app or visit cozylife.app.

14 Special Effects

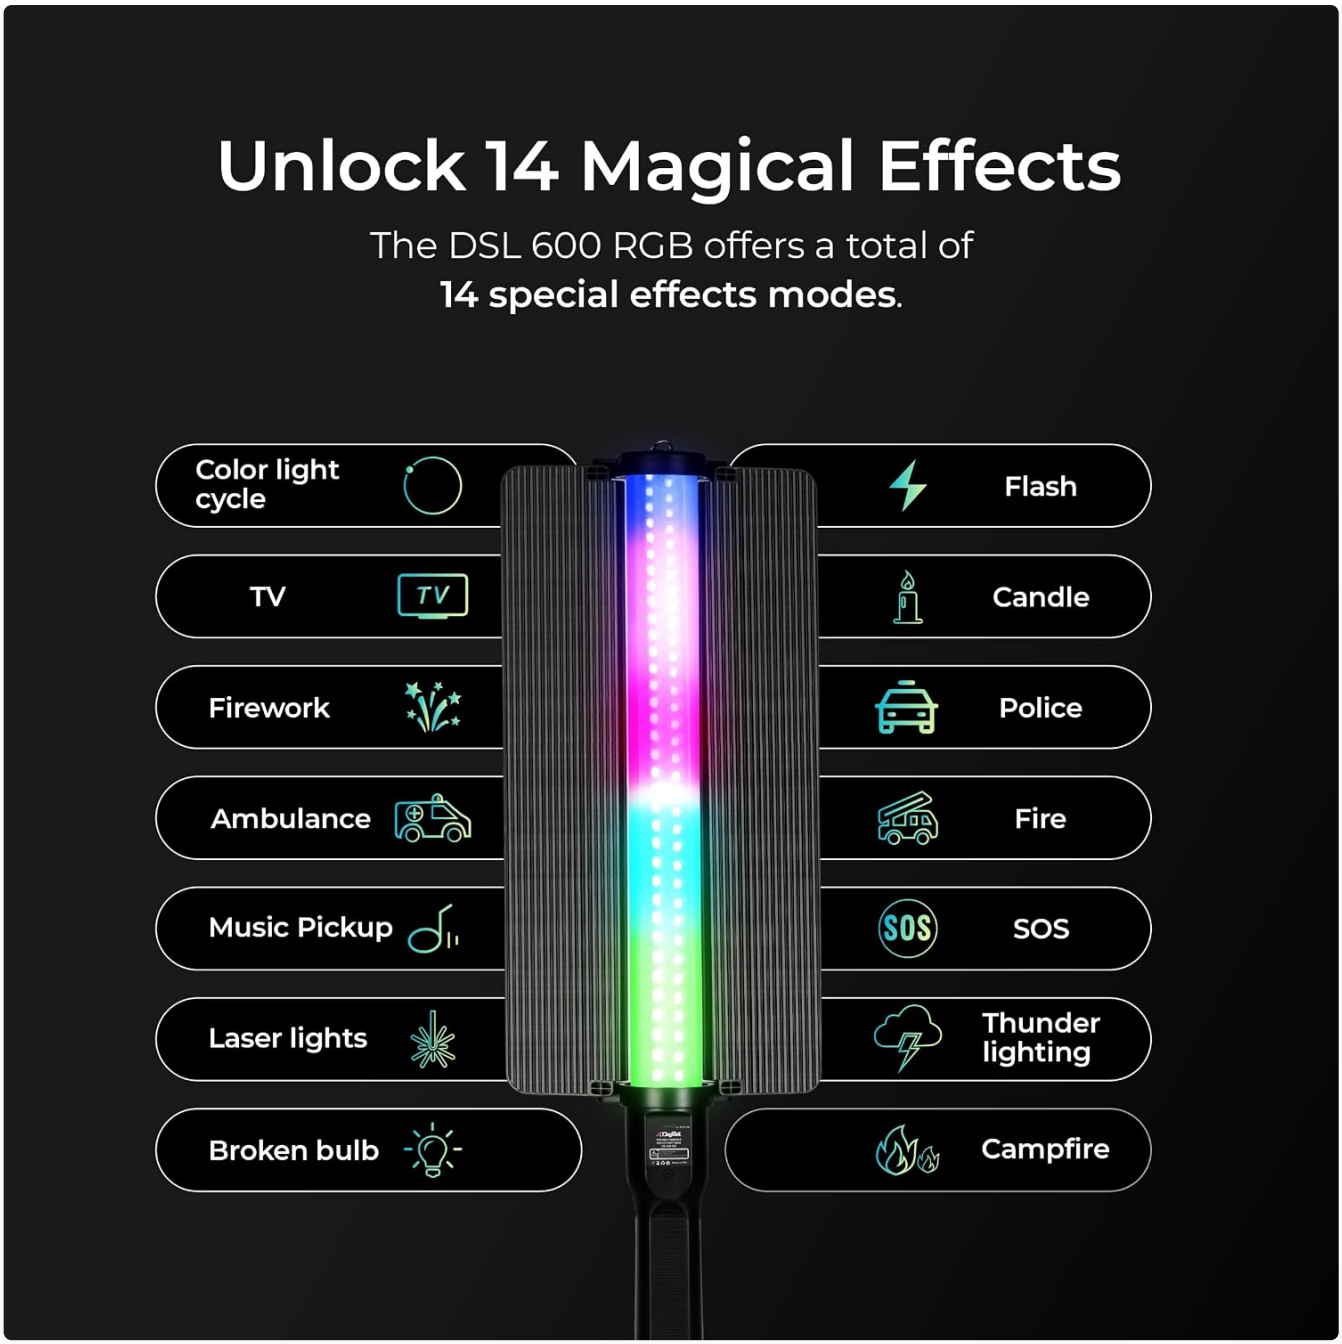


Image: The light offers 14 unique special effects modes for creative lighting scenarios.

4. Setup

4.1 Initial Charging

Before first use, fully charge the DSL-600 RGB light. Connect the provided Type-C charging cable to the light's Type-C port and the other end to the 9V/2A adapter. Plug the adapter into a power outlet. The charging indicator on the light will show its status.

4.2 Attaching Barndoors

The removable barndoors help control light spill. Align the barndoors with the grooves on the light body and slide them into place until they click securely. To remove, gently slide them off.

4.3 Mounting Options

The DSL-600 RGB can be used handheld or mounted:

- **Handheld:** Use the ergonomic handle for flexible positioning.
- **Tripod/Light Stand:** Utilize the 1/4" female thread located at the bottom of the handle to attach the light to a compatible tripod or light stand.



Image: The DSL-600 RGB can be used handheld or mounted via its 1/4" female thread.

5. Operating Instructions

5.1 Power On/Off

Press and hold the power button (usually located near the control knob) for a few seconds to turn the light on or off.

5.2 Basic Controls (On-Device)

The integrated LCD display and control knob allow for direct adjustments:

- **Mode Selection:** Short press the control knob to cycle through different modes (CCT, HSI, Special Effects).

- **Brightness Adjustment:** Rotate the control knob to adjust brightness from 1% to 100%.
- **Color Temperature (CCT Mode):** In CCT mode, rotate the knob to change color temperature from 2700K to 7500K.
- **Hue, Saturation, Intensity (HSI Mode):** In HSI mode, short press the knob to switch between adjusting Hue (0-360°), Saturation (0-100), and Intensity (0-100). Rotate the knob to change values.
- **Special Effects Mode:** In FX mode, rotate the knob to select from the 14 built-in special effects.

5.3 App Control

For advanced control and customization, download the dedicated mobile application. Scan the QR code provided on the product packaging or in the product images, or visit cozylife.app to download the app. Follow the in-app instructions to pair your device and access features like:

- Precise brightness and color adjustments.
- Access to all 14 special effects.
- Dynamic Music Sync Mode activation.
- Custom scene creation and saving.

6. Maintenance

6.1 Cleaning

To clean the light body, use a soft, dry cloth. For stubborn dirt, slightly dampen the cloth with water. Do not use harsh chemicals, solvents, or abrasive cleaners, as these can damage the surface or internal components.

6.2 Battery Care

- Avoid fully discharging the battery frequently.
- If storing the light for an extended period, charge it to approximately 50-70% capacity.
- Store in a cool, dry place away from direct sunlight and extreme temperatures.

7. Troubleshooting

Problem	Possible Cause	Solution
Light does not turn on.	Battery is depleted.	Charge the light using the provided Type-C cable and adapter.
Light output is weak or inconsistent.	Low battery; incorrect settings.	Ensure the light is fully charged. Check brightness and mode settings on the device or via the app.
App cannot connect to the light.	Bluetooth is off; light is off; app issue.	Ensure Bluetooth is enabled on your phone. Turn the light off and on again. Restart the app.
Barndoors are loose or fall off.	Improper attachment.	Ensure barndoors are correctly aligned with the grooves and securely slid into place.

8. Specifications

Feature	Specification
Brand	Digitek

Feature	Specification
Model	DSL-600 RGB
Power Output	35W Bi-Color + 30W RGB
Color Temperature	2700K-7500K + RGB
Luminance	Up to 3500 LM
CRI	>95
Brightness Adjustment	1%-100%
Special Effects	14 Built-in modes
Battery	4x 18650 Li-ion (6400mAh)
Charging Port	Type-C 9V/2A
Mounting	1/4" Female Thread
Product Dimensions	15 x 62 x 7.5 cm
Item Weight	1.2 kg
Country of Origin	China

9. Warranty and Support

For warranty information and customer support, please refer to the warranty card included with your product or contact Digitek customer service. The manufacturer is IMS Mercantiles Pvt. Ltd. For inquiries, you may contact them at 011 4707 4444.

© 2023 Digitek. All rights reserved.

Ask a question about this manual

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page's manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. Privacy details.

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question

Open the live page

https://manuals.plus/asin/B0CKN5J71T

More documents and user manuals: **https://manuals.plus/**