

[Manuals.plus](#) /

› [EASYWORC](#) /

› EASYWORC 36-42" W x 72" H Frosted Pivot Shower Glass Door Brushed Nickel Instruction Manual

EASYWORC EW-S6511C-4272-NI-FG

EASYWORC Frosted Pivot Shower Glass Door Instruction Manual

Model: EW-S6511C-4272-NI-FG | Brand: EASYWORC

IMPORTANT SAFETY INFORMATION

Please read all instructions carefully before installation and use. Failure to follow these instructions may result in injury or product damage.

- Always wear safety glasses when handling glass components.
- Handle glass panels with extreme care. Tempered glass, while strong, can shatter if struck at the edges.
- Ensure the installation surface is level and structurally sound to support the weight of the shower door.
- Professional installation is recommended for optimal safety and performance.
- Do not overtighten screws, as this may cause damage to components or glass.

PRODUCT OVERVIEW

The EASYWORC Frosted Pivot Shower Glass Door is designed for modern bathrooms, offering a customizable width from 36 to 42 inches and a height of 72 inches. It features 1/4" (6mm) SGCC tempered frosted glass with an explosion-proof film and nano-coating for enhanced safety and easy cleaning. The brushed nickel finish provides a sleek aesthetic.

Key Features

- **Adjustable Width:** Fits openings from 36" to 42" wide with a telescopic rail system allowing up to 6 inches of adjustment.
- **Frosted Tempered Glass:** 6mm thick SGCC certified glass with explosion-proof film for privacy and safety.
- **Nano Coating:** Interior nano coating prevents water spots and simplifies cleaning.
- **Pivot Operation:** Smooth outward swinging operation up to 90 degrees.
- **Stainless Steel Hardware:** Durable brushed nickel finish on frame and handle, including a towel bar.

- **Reversible Installation:** Can be installed for left or right wall opening.

Model Dimensions



This diagram illustrates the key dimensions of the shower door, including the adjustable model width, fixed height, access width, door width, and pivot panel width.

SETUP AND INSTALLATION

This section provides general guidance for installing your EASYWORC Frosted Pivot Shower Glass Door. For detailed, step-by-step instructions, please refer to the included installation manual and video guide.

Before You Begin

- **Tools Required:** Measuring tape, pencil, drill, level, screwdriver, caulk gun, silicone sealant, safety glasses.
- **Inspect Components:** Unpack all parts and check against the packing list to ensure everything is present and undamaged.
- **Prepare Area:** Ensure the shower opening is clean, dry, and properly prepared for installation.

Installation Steps Overview

The installation process involves mounting the wall profiles, installing the fixed glass panel, attaching the pivot hardware, and finally installing the pivot door. The telescopic rail allows for width adjustment to ensure a perfect fit.

This video provides a visual guide to the installation process for the EASYWORC Pivot Shower Door, demonstrating key steps for assembly and mounting.

Flexible Adjustment

The telescopic track can be adjusted up to 6in to fit your shower room.



The telescopic rail system allows for up to 6 inches of width adjustment, ensuring a precise fit for various shower openings.

Reversible Installation

The Shower door can reversible for right or left wall installation



The shower door is designed for reversible installation, allowing it to open from either the left or right side to suit your bathroom layout.

OPERATING INSTRUCTIONS

The EASYWORC Pivot Shower Glass Door is designed for smooth and convenient operation.

Opening and Closing the Door

- To open, gently pull the handle outward. The door pivots smoothly up to 90 degrees.
- To close, push the door inward until it aligns with the fixed panel and seals properly.
- Avoid forcing the door beyond its natural stopping points to prevent damage.



Features a high-performance pivot system for stable, smooth, and effortless door operation.

Designed with a bottom water barrier to help minimize splashing and keep bathroom floors clean and dry.

The integrated safety stop hinge prevents the door from opening beyond 90 degrees, protecting both the door and adjacent walls from damage.



This image demonstrates the simple operation of the pivot door, showing its closed and open positions for easy access.

MAINTENANCE AND CARE

Proper care will ensure the longevity and appearance of your shower door.

Glass Care

The glass panels feature an interior nano-coating for easy cleaning and resistance to water spots.

- Clean glass regularly with a soft cloth and mild, non-abrasive glass cleaner.
- Avoid using abrasive cleaners, scouring pads, or harsh chemicals, as these can damage the nano-coating and glass surface.
- Wipe down the glass after each use to minimize water spot buildup.




The premium nano-coating on the glass repels water, making cleaning easier and reducing the accumulation of water spots and soap scum.


Hardware Care

The brushed nickel hardware is designed for durability and rust resistance.

- Clean hardware with a soft, damp cloth.
- Do not use abrasive cleaners or harsh chemicals on the metal finish.
- Periodically check all screws and fasteners to ensure they are secure.

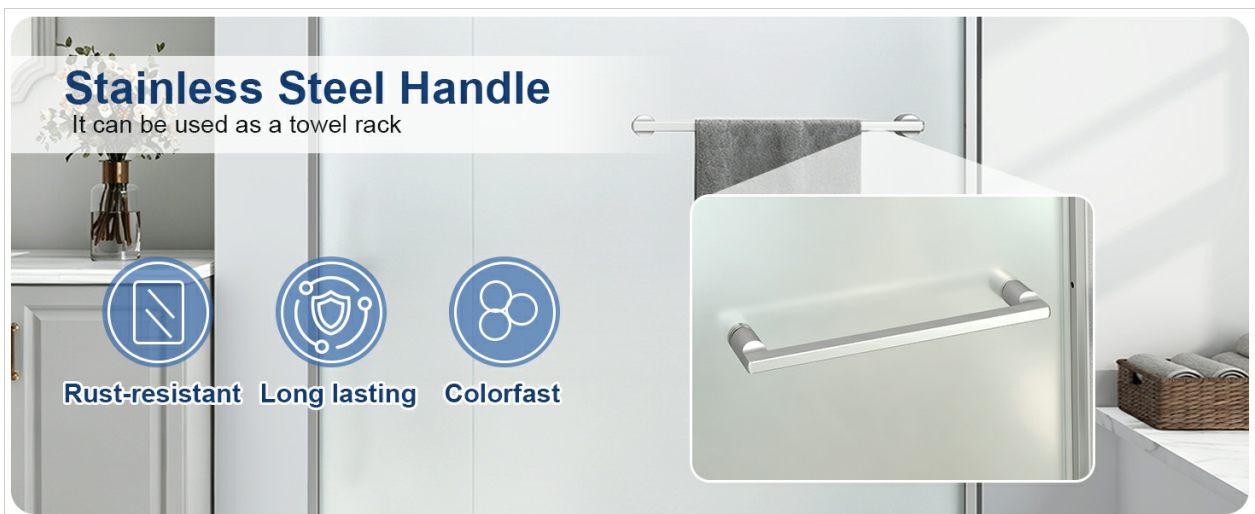

The stainless steel handle serves as a versatile towel bar, offering a comfortable grip and a rust-resistant finish for lasting performance.

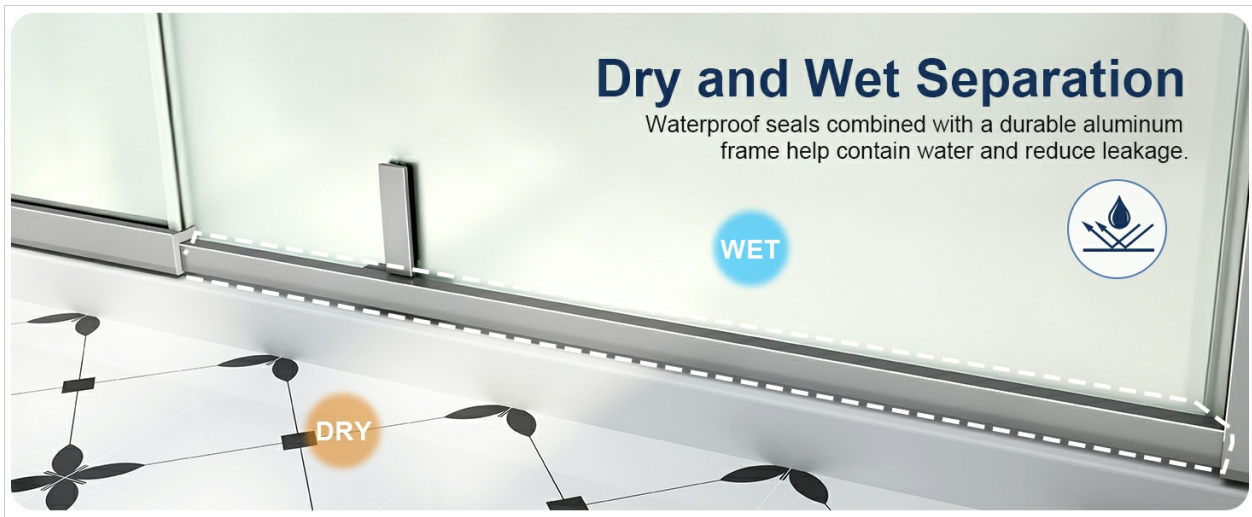

The bottom water barrier and waterproof seals are designed to minimize splashing and keep your bathroom floor dry.

TROUBLESHOOTING

If you encounter issues with your shower door, refer to the following common problems and solutions.

Common Issues and Solutions

- **Door not closing properly:**
Solution: Check if the wall profiles are plumb and level. Ensure the magnetic strips on the door and fixed panel align correctly. Adjust the telescopic rail if necessary to ensure proper alignment.
- **Water leakage:**
Solution: Inspect all seals (bottom sweep, side seals) for damage or improper installation. Ensure all silicone sealant applications are complete and watertight. Verify the bottom water barrier is correctly positioned.
- **Squeaking or stiff pivot:**
Solution: Apply a small amount of silicone-based lubricant to the pivot points. Ensure no debris is obstructing the pivot mechanism.
- **Glass appears cloudy or stained:**
Solution: Use a non-abrasive glass cleaner specifically designed for shower doors. For stubborn stains, a vinegar and water solution can be effective. Ensure the nano-coating is not damaged by harsh chemicals.

SPECIFICATIONS

Brand	EASYWORC
Model Number	EW-S6511C-4272-NI-FG
Color	Brushed Nickel Frosted Glass
Material	Glass
Style	Modern
Item Weight	70.8 pounds
Unit Count	1 Count

Included Components	Shower Door
---------------------	-------------

WARRANTY AND SUPPORT

EASYWORC products are manufactured to high-quality standards. For specific warranty details, please refer to the documentation included with your purchase or contact EASYWORC customer service.

Customer Support

If you have any questions, require assistance with installation, or need to report a missing or damaged part, please contact EASYWORC customer support. You can also visit the official EASYWORC store for more information and products:

[Visit the EASYWORC Store on Amazon](#)