

[Manuals.plus](#) /

› [DELIPOP](#) /

› DELIPOP 37W 60cm Dimmable LED Ceiling Light with Remote Control (Model HX-HB9D-26)

DELIPOP HX-HB9D-26

DELIPOP 37W 60cm Dimmable LED Ceiling Light

Model: HX-HB9D-26

INTRODUCTION

Thank you for choosing the DELIPOP 37W 60cm Dimmable LED Ceiling Light. This manual provides essential information for the safe installation, operation, and maintenance of your new lighting fixture. Please read these instructions carefully before installation and retain them for future reference.

This modern LED ceiling light features a unique petal design and offers versatile lighting options. You can adjust both brightness (10% to 100%) and color temperature (3000K warm white to 6500K cool white) using the included remote control, a standard wall switch, or a dedicated smartphone application.

SAFETY INSTRUCTIONS

- **Always turn off the power supply at the main circuit breaker before installation, maintenance, or cleaning.**
- Installation should be performed by a qualified electrician or a person with sufficient electrical knowledge to ensure safety.
- Ensure the mounting surface can support the weight of the fixture.
- Do not connect the fixture to a dimmer switch unless specifically designed for LED dimming. This product is designed for its own dimming system via remote or app.
- Verify that the voltage supply matches the requirements of the fixture (220V).
- Do not modify the fixture or its components.
- Keep packaging materials out of reach of children.
- Avoid looking directly into the LED light source when it is on, as it may cause eye strain.

PACKAGE CONTENTS

Carefully unpack the box and ensure all items are present and undamaged. If any parts are missing or damaged, please contact customer support.

- 1x DELIPOP LED Ceiling Light Fixture

- 1x Remote Control
- 1x Set of Installation Accessories (screws, wall plugs, etc.)
- 1x Instruction Manual (this document)



Image: DELIPOP LED Ceiling Light and its remote control. The remote shows buttons for ON/OFF, brightness adjustment, color temperature adjustment, night light mode, and a 30/60 minute timing function. A QR code for the "LampSmart Pro" app is also visible on the remote.

SPECIFICATIONS

Feature	Specification
Brand	DELIPOP
Model Number	HX-HB9D-26

Feature	Specification
Power	37W
Luminous Flux	4162 LM
Input Voltage	220 Volt (110V-240V compatible)
Color Temperature	3000K (Warm White) - 6500K (Cool White)
Brightness Adjustment	10% - 100% Stepless Dimming
Dimensions (L x W x H)	60cm x 60cm x 12.5cm (23.64 x 23.64 x 4.92 inches)
Material	Aluminum, Acrylic
Color	White
Control Methods	Remote Control, Wall Switch, APP Control
Applicable Area	10-15 square meters
Energy Efficiency Class	E (View EU Energy Label)

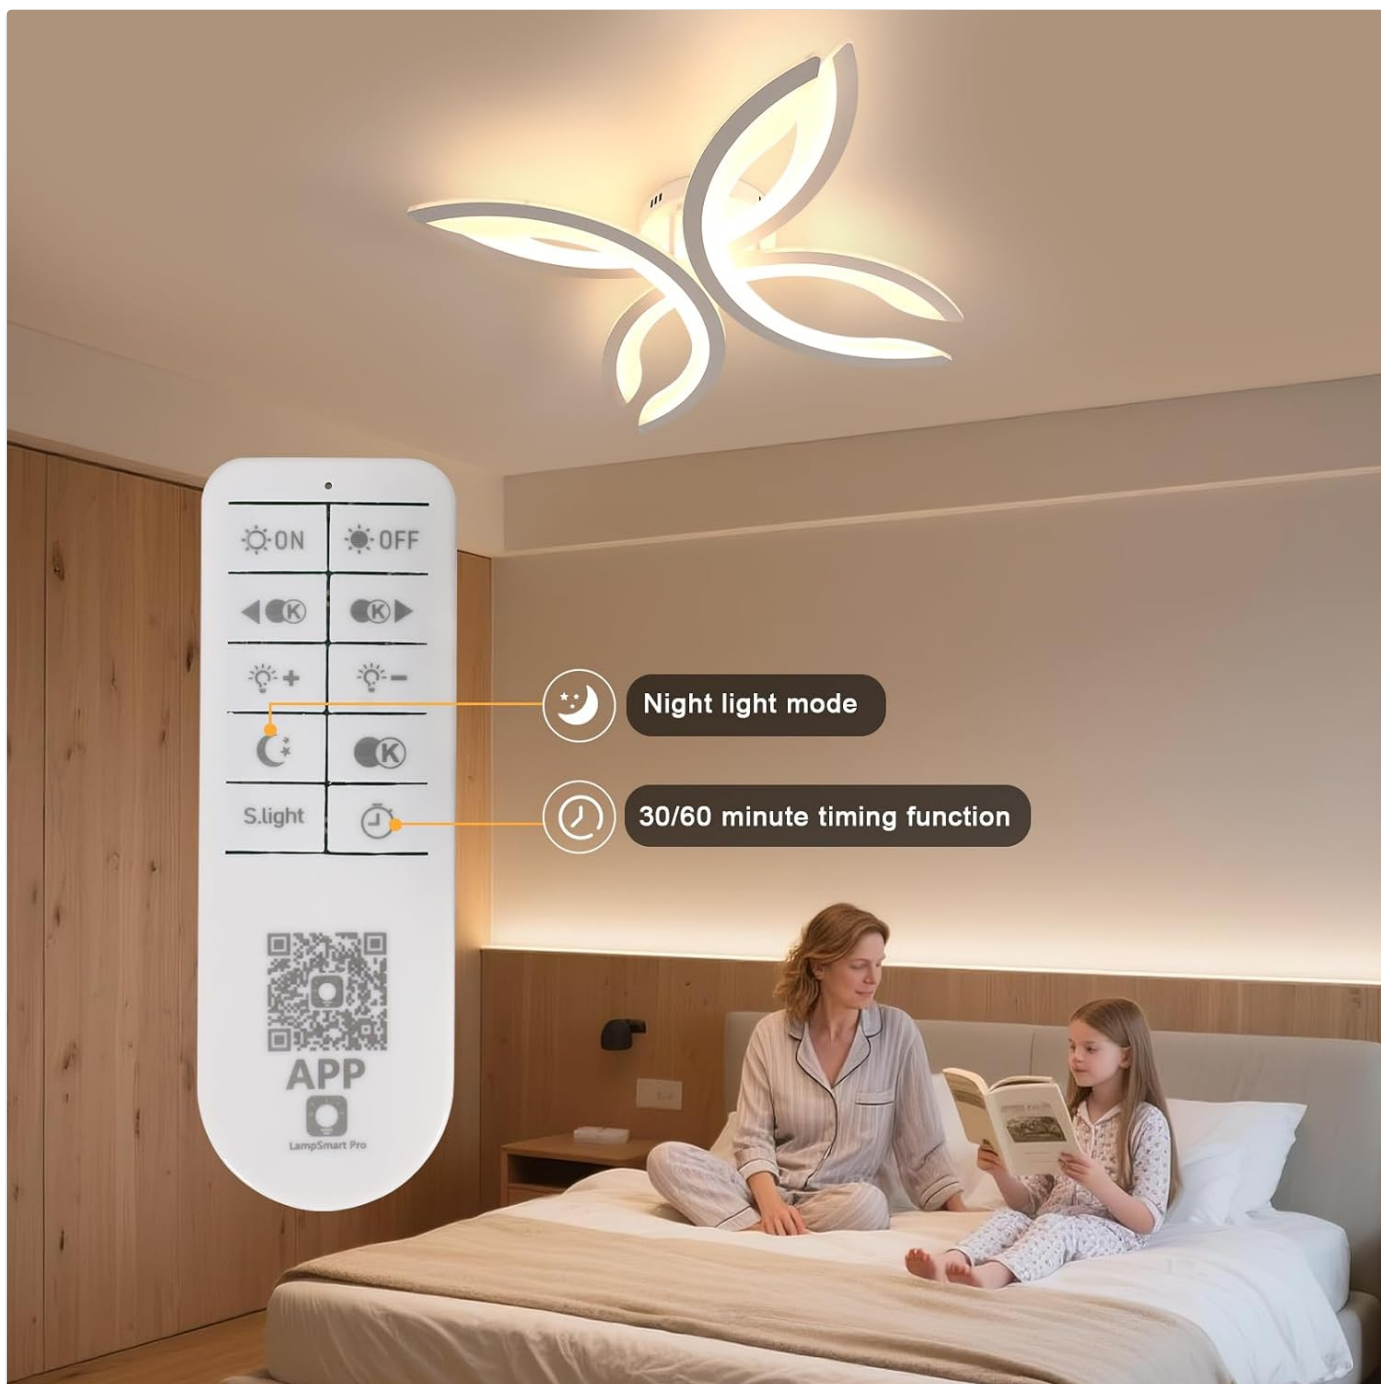


Image: Technical drawing showing the dimensions of the ceiling light: 60cm (23.62 inches) width and length, and 12.5cm (4.92 inches) height.

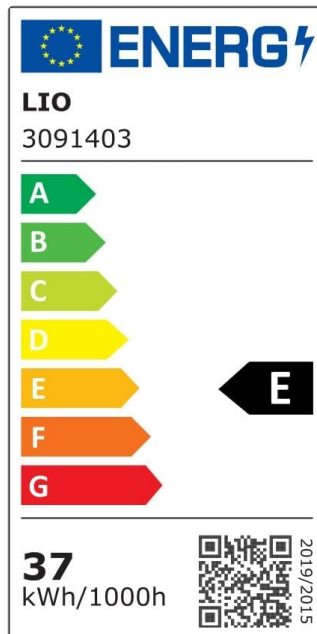


Image: EU Energy Label indicating an energy efficiency class of E and power consumption of 37 kWh/1000h.

INSTALLATION INSTRUCTIONS

Important: Ensure the power supply is OFF at the circuit breaker before beginning installation.

- 1. Prepare the Mounting Surface:** Choose a suitable location on the ceiling. Mark the drilling points for the mounting bracket using the fixture's base as a template.
- 2. Drill Holes:** Drill holes at the marked positions. Insert the wall plugs (if necessary) into the drilled holes.
- 3. Attach Mounting Bracket:** Secure the mounting bracket to the ceiling using the provided screws.
- 4. Electrical Connection:** Connect the household electrical wires to the corresponding terminals on the fixture. Ensure correct polarity (Live, Neutral, Ground). The wiring is updated according to European standards for safer and more convenient installation.
- 5. Mount the Fixture:** Carefully lift the LED ceiling light and align it with the mounting bracket. Secure the fixture to the bracket using the provided screws or locking mechanism. It is recommended to have two people for this step to ensure stability and safety.
- 6. Test the Light:** Once securely installed, restore power at the circuit breaker and test the light using the wall switch and remote control.

Note: The lamp can be easily mounted to the ceiling by a single person, but for safety and ease, two people are recommended, especially during the wiring and final mounting steps.

OPERATING INSTRUCTIONS


Wall Switch Control

The light can be turned ON/OFF using a standard wall switch. If the light is turned off and then quickly turned back on, the color temperature may cycle through warm, natural, and cool white settings. To maintain a specific color temperature setting, wait approximately 40-60 seconds before turning the light back on with the wall switch.

Remote Control Functions

The included remote control provides full functionality for adjusting your ceiling light.

- **ON/OFF:** Press the **ON** button to turn the light on, and **OFF** to turn it off.
- **Brightness Adjustment:** Use the **+** and **-** buttons to increase or decrease brightness from 10% to 100%.
- **Color Temperature Adjustment:** Use the **K+** and **K-** buttons to adjust the color temperature from 3000K (warm white) to 6500K (cool white).
- **Night Light Mode:** Press the **Night light mode** button (often depicted as a moon icon) for a soft, low-brightness light suitable for nighttime.
- **Timing Function:** Activate the 30/60 minute timer function (often depicted as a clock icon) to automatically turn off the light after the set duration. This is useful for preparing for sleep.

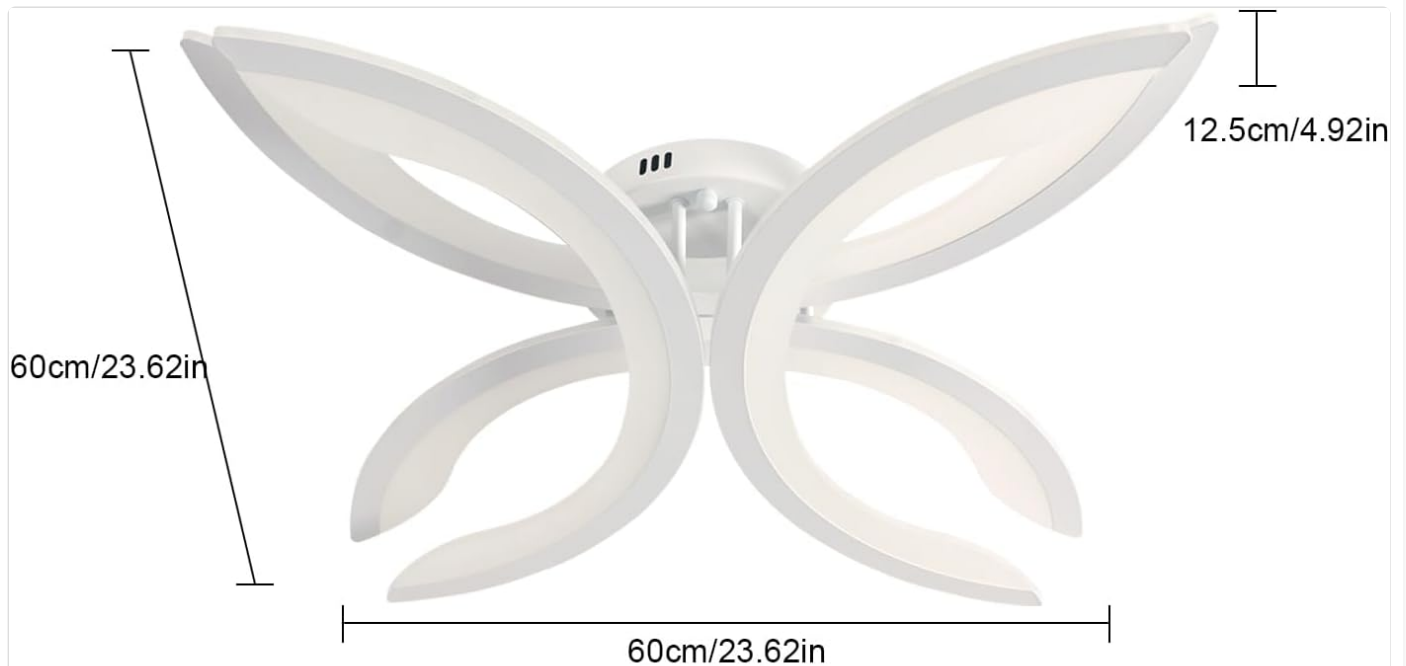

DIA 60cm	37W	4162LM	Dimmable 3000K-6500K	NO FLICKER	80% ENERGY SAVING

Image: Demonstrates the adjustable color temperature (3000K, 4500K, 6500K) and brightness (10% to 100%) of the DELIPOP LED Ceiling Light. Note: Not compatible with external dimmer switches.

APP CONTROL

For enhanced control, you can manage your DELIPOP LED Ceiling Light using a smartphone application.

1. **Download the App:** Scan the QR code on the remote control or visit <http://www.jasonghost.com/lampsmartpro/> to download the "LampSmart Pro" application.
2. **Pairing:** Follow the in-app instructions to pair your smartphone with the ceiling light. This typically involves turning the light on and off a few times or holding a specific button on the remote during the pairing process.
3. **Control Functions:** Once paired, you can use the app to adjust brightness, color temperature, set timers, and access

other smart features.

MAINTENANCE

- **Cleaning:** Ensure the power is off before cleaning. Use a soft, dry cloth to wipe the fixture. For stubborn dirt, a slightly damp cloth with mild soap can be used, then wipe dry immediately. Do not use abrasive cleaners or solvents.
- **Bulb Replacement:** The LED light source is integrated and not user-replaceable. The LEDs are designed for a long lifespan.
- **Inspection:** Periodically check the fixture for any signs of damage or loose connections. If any issues are found, disconnect power and contact a qualified technician.

TROUBLESHOOTING

Problem	Possible Cause	Solution
Light does not turn on.	No power supply; loose wiring; remote control battery depleted.	Check circuit breaker. Ensure all wires are securely connected. Replace remote control batteries.
Remote control not working.	Batteries depleted; remote not paired; obstruction between remote and light.	Replace batteries. Ensure clear line of sight. Re-pair the remote if necessary (refer to pairing instructions, usually involves turning light on/off or holding a button).
Light flickers or dims unexpectedly.	Unstable power supply; incompatible external dimmer switch; faulty wiring.	Ensure stable power. Do not use with external dimmer switches. Check wiring connections. If problem persists, contact support.
Color temperature changes when using wall switch.	Quick ON/OFF cycle of the wall switch.	This is a design feature. To maintain a specific color setting, wait 40-60 seconds after turning off the light before turning it back on with the wall switch.
APP control not connecting.	Bluetooth/Wi-Fi issue; app not paired correctly; outdated app version.	Ensure Bluetooth is enabled on your device. Re-attempt pairing through the app. Update the app to the latest version.

WARRANTY AND SUPPORT

DELIPOP products are manufactured to high-quality standards. For warranty information, please refer to the terms and conditions provided at the point of purchase or contact your retailer.

If you encounter any issues or have questions regarding your DELIPOP LED Ceiling Light, please contact our customer support team. Please have your model number (HX-HB9D-26) and purchase details ready when contacting support.

Customer Support Contact: Please refer to the contact information provided by your retailer or the DELIPOP official website.

ASK A QUESTION ABOUT THIS MANUAL

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page's manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. [Privacy details](#).

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question

Open the live page

<https://manuals.plus/asin/B0GYRXWZ8S>

More documents and user manuals: <https://manuals.plus/>