

VBESTLIFE VBESTLIFE24asf87myl

VBESTLIFE VGA to HDMI Dual Monitor Converter with Audio Sync

Model: VBESTLIFE24asf87myl

INTRODUCTION

The VBESTLIFE VGA to HDMI Dual Monitor Converter is designed to facilitate the connection of devices with a VGA output to displays with either HDMI or VGA inputs, supporting simultaneous dual display configurations. This adapter includes audio synchronization capabilities and is suitable for use with desktop computers, laptops, and projectors. It offers a plug-and-play experience without the need for additional drivers.

PRODUCT FEATURES

- **Dual Screen Support:** Converts VGA signals to both HDMI and VGA outputs simultaneously, enabling flexible multi-screen setups without additional adapters.
- **Stable Video Transmission:** Equipped with advanced processing chips to ensure crisp resolution output and consistent signal stability for prolonged use across various devices.
- **Wide Compatibility:** Universally designed to work seamlessly with desktops, laptops, and projectors, supporting clear resolutions.
- **Audio Synchronization Function:** Features a 3.5mm audio input port, providing synchronized audio and video output via HDMI, eliminating the need for separate audio cables.
- **Plug and Play Convenience:** Operates without requiring drivers and is powered via USB for simple setup. Connect your devices for quick signal conversion.

PACKAGE CONTENTS

Please check the package for the following items:

- 1 x VBESTLIFE VGA to HDMI Dual Monitor Converter
- 1 x USB Power Cable
- 1 x 3.5mm Audio Cable



Image: The VBESTLIFE VGA to HDMI Dual Monitor Converter shown with its VGA input cable, HDMI and VGA output ports, a 3.5mm audio input, a micro USB power input, and the included USB power cable and 3.5mm audio cable.

SETUP INSTRUCTIONS

1. **Connect VGA Input:** Plug the VGA connector of the converter into the VGA output port of your source device (e.g., PC, laptop). Ensure the screws are tightened for a secure connection.
2. **Connect Audio Input:** Insert the 3.5mm audio cable into the audio input port on the converter and connect the other end to the audio output (headphone jack) of your source device.
3. **Connect Power:** Connect the micro USB power cable to the converter's 5V/1A power input port and the other end to a USB power source (e.g., computer USB port, USB wall adapter). This is essential for stable operation.
4. **Connect HDMI Output:** Connect an HDMI cable (not included) from the converter's HDMI output port to the HDMI input of your primary display (e.g., monitor, TV).
5. **Connect VGA Output:** Connect a VGA cable (not included) from the converter's VGA output port to the VGA input of your secondary display (e.g., monitor, projector).
6. **Power On Devices:** Turn on your source device and connected displays. The converter should automatically detect and

transmit the signal.



Secure Screw-In Connection

Thumbscrews Helps Keep Accidental Disconnection

✓ Plug and Play

Image: A diagram illustrating the connection process. A laptop or PC connects via VGA and 3.5mm audio to the converter, which then outputs to a TV via HDMI and a projector or display via VGA. A USB power adapter is shown connected to the converter.



DUAL SCREEN VGA TO HDMI & VGA ADAPTER

Connect Two Displays Simultaneously



Image: A desktop computer connected to the VGA to HDMI converter, which then connects to two monitors, demonstrating the dual screen display capability.

OPERATING INSTRUCTIONS

Once all connections are made and devices are powered on, the converter will automatically begin transmitting the video and audio signals. No additional software or drivers are required for operation.

- **Dual Display Mode:** Your computer's display settings can be configured to either duplicate the screen across both connected displays or extend the desktop, allowing for a larger workspace. Adjust these settings within your operating system's display preferences.
- **Audio Output:** The audio signal from your source device will be embedded into the HDMI output and also passed through the 3.5mm audio output if connected to external speakers. Ensure your display or external speakers are set to the correct input source for audio.

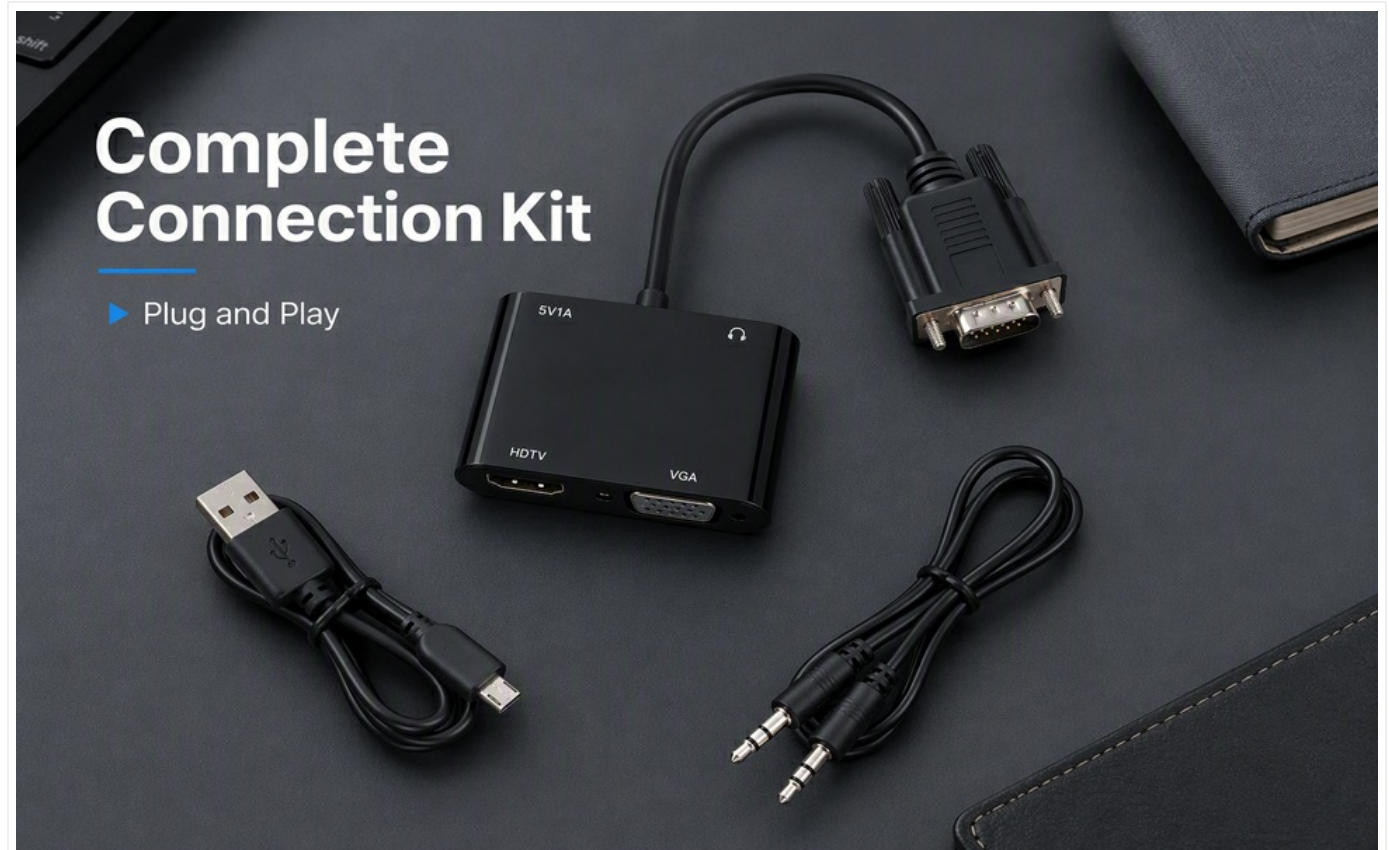


Image: A close-up view of the converter highlighting the 3.5mm audio input port and the micro USB power input, emphasizing the sound sync function.

TROUBLESHOOTING

- **No Video Output:**
 - Ensure all cables (VGA, HDMI, power) are securely connected.
 - Verify the converter is receiving power via the USB cable.
 - Check that your display is set to the correct input source (HDMI or VGA).
 - Test with different cables or displays if possible.
 - Restart your source device and displays.
- **No Audio Output:**
 - Confirm the 3.5mm audio cable is properly connected from your source device to the converter.
 - Ensure the HDMI cable is connected to a display that supports audio or that external speakers are connected to the display's audio output.

- Check your computer's audio settings to ensure the correct output device is selected.
- Adjust volume levels on both your source device and display/speakers.

• **Unstable or Flickering Display:**

- Ensure the USB power cable is connected and providing sufficient power.
- Check for loose cable connections.
- Reduce the display resolution on your source device if the issue persists.

SPECIFICATIONS

Feature	Detail
Brand	VBESTLIFE
Model Number	VBESTLIFE24asf87myl
Input	VGA, 3.5mm Audio, Micro USB (5V/1A)
Output	HDMI, VGA
Dual Screen Support	Yes
Plug and Play	Yes
Manufacturer	VBESTLIFE

MAINTENANCE

To ensure the longevity and optimal performance of your VBESTLIFE VGA to HDMI Dual Monitor Converter, please follow these maintenance guidelines:

- **Cleaning:** Use a soft, dry cloth to clean the exterior of the converter. Do not use liquid cleaners or aerosols, as they may damage the device.
- **Storage:** Store the converter in a cool, dry place away from direct sunlight and extreme temperatures when not in use.
- **Handling:** Avoid dropping or subjecting the converter to strong impacts. Handle cables by the connectors, not the wires, to prevent damage.
- **Ventilation:** Ensure the converter is placed in an area with adequate ventilation to prevent overheating.

WARRANTY AND SUPPORT

Warranty: The manufacturer guarantees this product for 90 days from the date of purchase. Please retain your proof of purchase for warranty claims.

Customer Support: For technical assistance, troubleshooting, or warranty inquiries, please contact VBESTLIFE customer support through the retailer's platform or the official VBESTLIFE website. Provide your product model number (VBESTLIFE24asf87myl) and a detailed description of the issue when seeking support.

ASK A QUESTION ABOUT THIS MANUAL

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page's manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. [Privacy details](#).

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question