

[Manuals.plus](#) /

> [Auxbeam](#) /

> Auxbeam Wireless Remote Control for AC-1200 12 Gang Switch Panel Instruction Manual

## Auxbeam AC-1200 Remote Control

# Auxbeam Wireless Remote Control for AC-1200 12 Gang Switch Panel Instruction Manual

Model: AC-1200 Remote Control

---

## INTRODUCTION

This manual provides detailed instructions for the Auxbeam Wireless Remote Control, designed specifically for the AC-1200 12 Gang Switch Panel. Please read this manual thoroughly before use to ensure proper operation and to maximize the product's functionality.



Image: The Auxbeam Wireless Remote Control, featuring 12 numbered buttons and an ON/OFF button.

## SETUP

### Battery Installation

The remote control comes with a pre-installed CR2477/3V battery, ready for immediate use. If battery replacement is needed, refer to the Maintenance section.

### Pairing the Remote Control

Follow these two steps to pair your wireless remote control with the AC-1200 12 Gang Switch Panel:

1. **Step 1:** Simultaneously press the **ON/OFF** button and any numbered button on the **AC-1200 Switch Panel**. Hold until the red indicator light on the panel illuminates.
2. **Step 2:** Press the **ON/OFF** button on the **12-channel wireless remote control**. The green indicator light on the panel will flash twice, confirming successful pairing.



# EASY TO USE

## PAIRING

01

Press ON/OFF button + any button



02

Press the "ON/OFF" button



## UNPAIRING

Long Press the ON/OFF button for 12 seconds



Image: Visual guide demonstrating the two-step pairing process and the unpairing method for the remote control and switch panel.

### Unpairing the Remote Control

To unpair the remote control from the switch panel, long press the **ON/OFF** button on the **AC-1200 Switch Panel** for 12 seconds. This will clear the pairing.

### Multiple Remote Control Usage

One AC-1200 circuit control box can be paired with up to four wireless remote controls simultaneously. Additional remote controls are sold separately.



# PAIRS WITH UP TO 4 REMOTE CONTROLS

THE PACKAGE CONTAINS ONLY ONE  
AND MORE CAN BE PURCHASED SEPARATELY

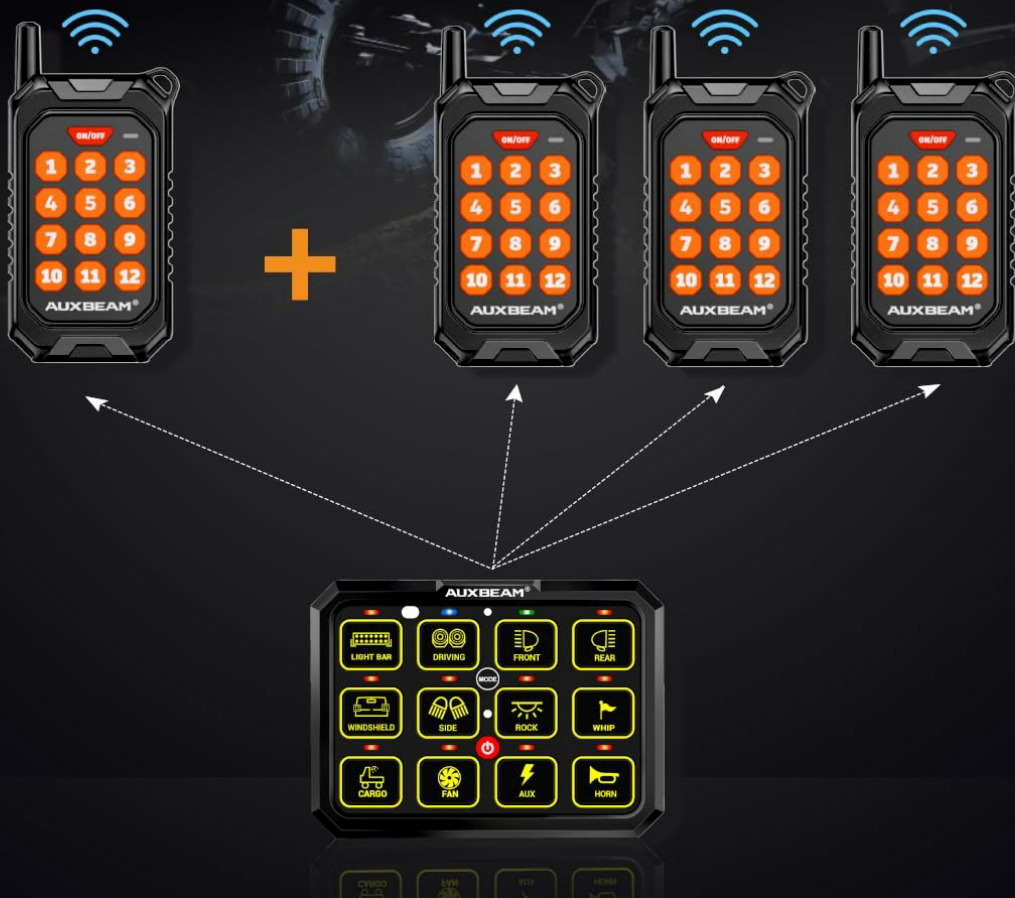


Image: Illustration showing one AC-1200 switch panel paired with four separate wireless remote controls.

## OPERATING INSTRUCTIONS

The Auxbeam Wireless Remote Control allows for convenient operation of your AC-1200 12 Gang Switch Panel from a distance.

- **Functionality:** Each numbered button (1-12) on the remote corresponds to a specific circuit on the AC-1200 switch panel, allowing you to turn connected accessories ON or OFF. The ON/OFF button on the remote controls the overall power state or memory function of the panel.
- **Range:** The remote operates with a range of up to 165 feet (50 meters) in an interference-free environment.
- **Synchronization:** The operation of the remote control, the AC-1200 panel, and the Bluetooth mobile

app (if used) is synchronized.

- **Placement:** The remote control features a magnet on its back, allowing it to be easily attached to any metal surface for convenient storage and access.



Image: Diagram illustrating the wireless remote control's effective operating range of 165 feet (50 meters) from a vehicle.



# WIRELESS REMOTE CONTROL

FIT FOR AC-1200 12 GANG SWITCH PANEL



Image: Visual representation of the remote control synchronizing with the AC-1200 switch panel, showing corresponding button states.



# CONVENIENT TO USE AND CARRY

COMPACT IN SIZE AND EQUIPPED WITH MAGNET

MAGNET



Image: The remote control's compact size (2.3" x 4") and integrated magnet for easy attachment to metal surfaces.

## MAINTENANCE

### Battery Replacement

The remote control uses a CR2477/3V lithium metal battery. To replace the battery:

1. Carefully open the battery compartment on the back of the remote control.
2. Remove the old battery.
3. Insert a new CR2477/3V battery, ensuring correct polarity.
4. Close the battery compartment securely.

### Cleaning

To clean the remote control, use a soft, dry cloth. Avoid using abrasive cleaners or solvents, as these may damage the surface or internal components.

## TROUBLESHOOTING

- **Remote not pairing:** Ensure the AC-1200 switch panel is powered on. Re-attempt the pairing steps carefully. If issues persist, try unpairing any existing connections from the switch panel before re-pairing.
- **Limited operating range:** Check for potential sources of interference (e.g., other wireless devices, large metal objects) between the remote and the switch panel. Ensure the remote's battery is not low.
- **Remote unresponsive:** Check the battery. If the battery is low or depleted, replace it with a new CR2477/3V battery.
- **Buttons not responding:** Ensure the remote is properly paired. If only specific buttons are unresponsive, there might be an internal issue; contact customer support.

## SPECIFICATIONS

Feature	Specification
Model	AC-1200 Remote Control
Compatibility	Auxbeam AC-1200 12 Gang Switch Panel
Frequency	433MHz
Channels	12-Channel
Operating Range	Up to 165 feet (50 meters) in interference-free environment
Battery Type	1 x CR2477/3V Lithium Metal (included)
Dimensions	2.3" x 4" (approximate)
Special Feature	Ergonomic design, Magnetic back

## WARRANTY AND SUPPORT

Auxbeam products are designed for reliability and performance. This product is covered by a 2-year service period from the manufacturer. For technical assistance, troubleshooting, or warranty claims, please contact Auxbeam customer support through their official channels.

For more information, visit the [Auxbeam Store](#).