

PARTPHONER PAPO078AB1

PARTPHONER Black Roman Dusk to Dawn Outdoor Lamp Post with GFCI Outlet

Model: PAPO078AB1

Safety Information

Setup & Installation

Specifications

Operating Instructions

Warranty & Support

Maintenance

Troubleshooting

INTRODUCTION

Thank you for choosing the PARTPHONER Black Roman Dusk to Dawn Outdoor Lamp Post with GFCI Outlet. This triple-head aluminum street light is designed to provide reliable and aesthetically pleasing illumination for your outdoor spaces, including backyards, gardens, patios, and driveways. Featuring a built-in GFCI outlet and a smart photocell sensor, this fixture combines convenience with energy efficiency. Please read this manual thoroughly before installation and operation to ensure safe and optimal performance.



Overall view of the PARTPHONER Black Roman Dusk to Dawn Outdoor Lamp Post.

IMPORTANT SAFETY INFORMATION

Always follow basic safety precautions when installing and operating electrical equipment to reduce the risk of fire, electric shock, and personal injury.

- **WARNING:** Risk of electric shock. Disconnect power at the circuit breaker or fuse box before installation or servicing.
- This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.
- Use only UL-listed wire connectors.
- Ensure all connections are secure and properly insulated.
- Do not exceed the maximum wattage specified for the bulbs.

- Keep children away from the installation area.
- Wear appropriate safety gear, including gloves and eye protection, during installation.

SETUP & INSTALLATION

This lamp post is designed for hardwired installation. Due to the nature of the installation, it is highly recommended to hire a qualified electrician for proper and safe setup. Masonry work for the ground foundation may also be required.


Pre-Installation Steps:

1. **Unpack Contents:** Carefully remove all components from the packaging. Verify that all parts are present according to the packing list.
2. **Prepare Foundation:** For new installations, prepare a concrete base with appropriate anchor bolts. The lamp post requires bolts to be approximately 7.68 inches apart from center to center.
3. **Power Disconnection:** Ensure the main power supply to the installation area is turned off at the circuit breaker.

Assembly Steps:

4. **Mounting Plate:** Use the additional mounting plate for quick positioning on your prepared foundation.
5. **Assemble Pole Sections:** Carefully connect the pole sections, ensuring wires are not pinched.
6. **Attach Lantern Heads:** Connect the three lantern heads to the top of the pole. This step may require careful handling due to wiring and tight spaces. Feed wires and secure with provided screw-on washer/nut fixtures.
7. **Wiring:** Connect the lamp post's electrical wires to your main power supply wiring. Ensure proper grounding and secure all connections with UL-listed wire nuts. Wrap connections with electrical tape for added insulation.
8. **Secure to Foundation:** Mount the assembled lamp post onto the anchor bolts in the concrete foundation and secure tightly.
9. **Install Bulbs:** Insert the three included E26 base LED bulbs into the sockets within each lantern head.

Dimension

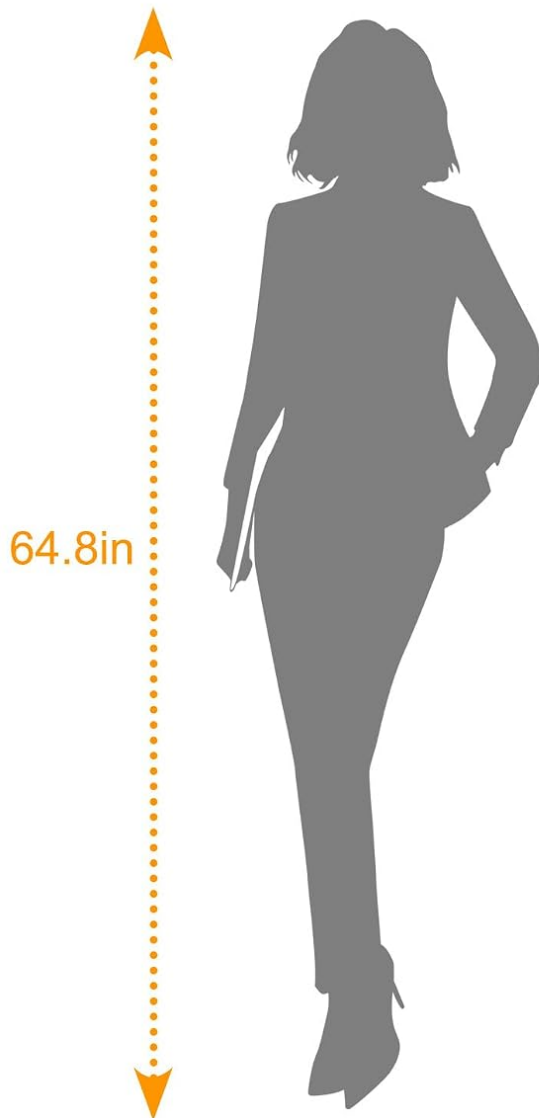

Product dimensions: 23 inches (W) x 92 inches (H), with 3 LED bulbs included.

Note: Professional installation by a licensed electrician is strongly recommended for safety and compliance with local electrical codes. Masonry work for the ground foundation should be prepared first, including digging holes, setting bolts, and pouring fresh concrete.

OPERATING INSTRUCTIONS

Dusk to Dawn Sensor:

This lamp post features an advanced photocell sensor that automatically detects ambient light levels. The lights will turn on at dusk and turn off at dawn, providing hands-free operation and contributing to energy savings. No manual intervention is required for daily light control.



The smart photocell sensor automatically turns the light on at night and off during the day.

GFCI Outlet Usage:

The integrated GFCI (Ground Fault Circuit Interrupter) outlet provides convenient outdoor power access with enhanced safety features. It protects against power surges, short circuits, and other electrical faults. To use the outlet:

1. Ensure the lamp post is powered on.
2. Press the 'RESET' button on the GFCI outlet if the indicator light is off or if power is not available.
3. Plug in your outdoor devices (e.g., Christmas lights, security camera, lawn tools). The outlet supports a maximum load of 1875W with 15AWG input wire.



Detail of the GFCI outlet, showing the 'RESET' and 'TEST' buttons for safe operation.

For Multi-Purpose Use



The integrated GFCI outlet allows for multi-purpose use, such as powering holiday lights or lawn tools.

MAINTENANCE

Cleaning:

- To clean the fixture, ensure power is disconnected.
- Wipe the exterior surfaces with a soft, damp cloth. Do not use abrasive cleaners or solvents, as they may damage the finish or glass.
- Regularly inspect the glass panels for dirt or debris that might obstruct light output.

Bulb Replacement:

- Always disconnect power before replacing bulbs.
- Allow bulbs to cool completely before handling.
- This fixture uses E26 base bulbs. Replace with LED bulbs of up to 18 watts for optimal performance and energy

efficiency.

Weather Resistance:

The lamp post is crafted from cast aluminum and sturdy water glass panels, making it anti-rust, corrosion-resistant, waterproof, and snowproof. Regular inspection for any signs of wear or damage is recommended to maintain its integrity against weather conditions.



The lamp post is designed to withstand various weather conditions, including rain and snow.

Die Cast Aluminum with Water Glass



Detailed view of the die-cast aluminum frame and water glass panels, highlighting the robust construction.

TROUBLESHOOTING

Problem	Possible Cause	Solution
Light does not turn on at dusk.	1. Power is off. 2. Photocell sensor is obstructed or faulty. 3. Bulb is loose or burnt out.	1. Check circuit breaker. 2. Ensure sensor is clean and not blocked by objects. If faulty, contact support. 3. Tighten or replace bulb.

Problem	Possible Cause	Solution
GFCI outlet has no power / RESET button won't engage.	1. GFCI has tripped due to fault. 2. Faulty GFCI unit. 3. No power to the lamp post.	1. Unplug all devices, press RESET. If it trips again, there's a fault in a connected device or wiring. 2. If the GFCI continues to trip or won't reset, it may be faulty and require replacement by a qualified electrician. 3. Check the main power supply to the lamp post.
Light stays on during the day.	1. Photocell sensor is obstructed or in a dark location. 2. Faulty photocell sensor.	1. Ensure sensor is not blocked by objects or shadows. Relocate if necessary. 2. Contact support for replacement if sensor is faulty.
Flickering lights.	1. Loose bulb connection. 2. Incompatible bulb. 3. Wiring issue.	1. Tighten bulbs. 2. Ensure bulbs are E26 base LED, up to 18W. 3. Consult a qualified electrician to inspect wiring.

PRODUCT SPECIFICATIONS

Brand: PARTPHONER

Model Name: PAPO078AB1

Color: Black

Material: Aluminum, Glass (Water Glass)

Style: Antique

Product Dimensions: 23"L x 23"W x 92"H (7.7 feet tall)

Item Weight: 21.5 pounds

Indoor/Outdoor Usage: Outdoor

Power Source: Corded Electric

Installation Type: Hardwired, Base Mount (Pole Mount)

Special Features: Dusk to Dawn Sensor, GFCI Outlet

Light Source Type: LED (Bulbs Included)

Number of Light Sources: 3

Voltage: 110 Volts (AC)

Wattage: 18 watts (per bulb, total 54W)

Bulb Base: E26

Brightness: 1800 Lumen

Color Temperature: 2700 Kelvin

Water Resistance Level: Water Resistant

Assembly Required: Yes

Recommended Uses: Outdoor Garden, Street, Patio, Driveway

WARRANTY & SUPPORT

Warranty Information:

This product comes with an Extended Warranty. For specific details regarding the warranty period and coverage, please refer to the documentation included with your purchase or contact PARTPHONER customer service.

Protection Plans:

Optional protection plans are available for purchase to extend coverage beyond the standard warranty. These may include:

- 3-Year Protection Plan
- 4-Year Protection Plan
- Complete Protect (monthly plan covering multiple purchases)

For more information on these plans, please consult your retailer or the plan provider.

Customer Support:

If you encounter any issues, have questions about installation, operation, or require technical assistance, please contact PARTPHONER customer support. Refer to your product packaging or the brand's official website for the most current contact information.

ASK A QUESTION ABOUT THIS MANUAL

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page's manual context to help answer it.

Name

Email

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. [Privacy details](#).

Question

Details

Submit question