


[Skip to content](#)

Manuals+

User Manuals Simplified.

ASSA ABLOY 426F Exit Device Trim Installation Guide

[Home](#) » [ASSA ABLOY](#) » ASSA ABLOY 426F Exit Device Trim Installation Guide 

ASSA ABLOY 426F Exit Device Trim



Contents

- [1 ASSA ABLOY 426F Exit Device Trim](#)
- [2 Product Usage Instructions](#)
- [3 FAQ](#)
- [4 Installation Instructions](#)
- [5 To Change Hands](#)
- [6 Tools Needed](#)
- [7 CONTACT](#)
- [8 Documents / Resources](#)

8.1 References

ASSA ABLOY

ASSA ABLOY 426F Exit Device Trim



Product Usage Instructions

- Remove the cotter pin.
- Remove the castle nut.
- Remove washer.
- Carefully pull up on the spring hub to disengage the spring.
- Remove the spring and note orientation.
- Remove the lever handle.
- Pick up a flat gear, flip, and orient the stop on the opposite side of the top post.
- Install the spring upside down from the original orientation and place the spring leg on the opposite side of the stop post from the original installation orientation.
- Install the lever 180 degrees from the original position.
- Install a spring hub with a stamped number in the 6 o'clock position.
- Rotate the spring leg around with needle nose pliers to engage the notch in the spring hub, refer to pictures for the reference position.
- Press down on the spring hub to ensure complete engagement.
- Install washer.
- Install the castle nut, do not overtighten, and verify by ensuring the lever returns horizontally on its own.
- Install cotter pin.


FAQ

- **Is this product suitable for fire-rated openings?**
 - Any retrofit or field modification to a fire-rated opening may impact the fire rating. Please consult with a code specialist or local code official to ensure compliance with all applicable codes and ratings.
- **What should I do if I encounter lead exposure warnings?**
 - If you encounter lead exposure warnings, please visit www.P65warnings.ca.gov for more information regarding potential health risks associated with lead exposure.


This product is now proudly being offered under the ASSA ABLOY ACCENTRA™ brand, effective June 20, 2023. Visit YaleCommercial.com/en/Today for support and information.

Installation Instructions

Left Hand Reverse Gear & Spring Orientation

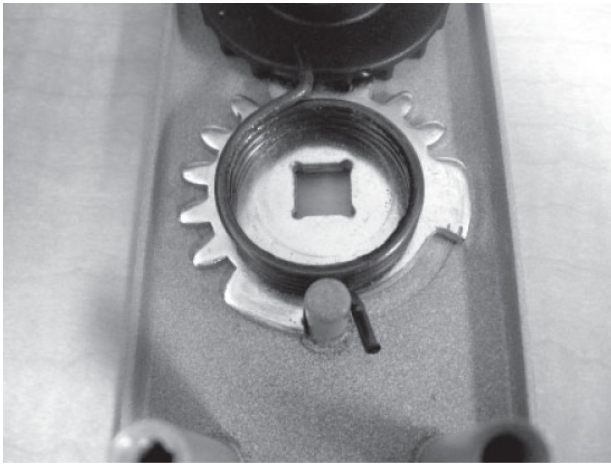

Right Hand Reverse Gear & Spring Orientation

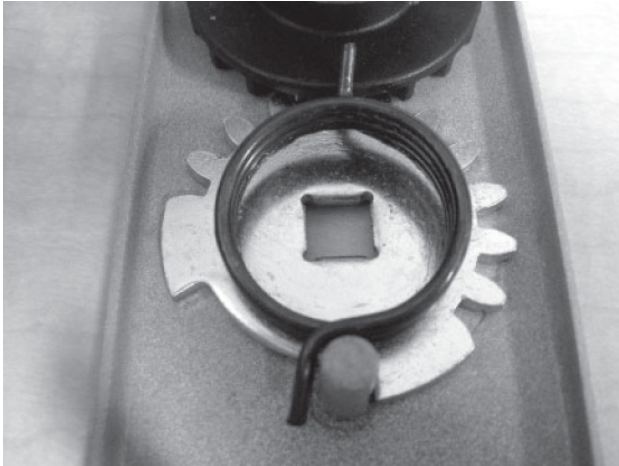

WARNING

This product can expose you to lead which is known to the state of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65warnings.ca.gov.

WARNING

Attention Installer: Any retrofit or other field modification to a fire-rated opening can potentially impact the fire rating of the opening, and ASSA ABLOY makes no representations or warranties concerning what such impact may be in any specific situation. When retrofitting any portion of an existing fire-rated opening, or specifying and installing a new fire-rated opening, please consult with a code specialist or local code official (Authority Having Jurisdiction) to ensure compliance with all applicable codes and ratings.

To Change Hands


NOTES

1. During change ensure black driven gear does not rotate.
2. Please wear safety glasses and be aware of spring tension on spring hub upon removal and assembly.
3. Light lubrication is recommended under flat gear, white lithium grease can be used.


Tools Needed

Tools Needed: Needle Nose pliers, Crescent wrench

1. Remove the cotter pin.
2. Remove the castle nut.
3. Remove washer.
4. Carefully pull up on the spring hub to disengage the spring.
5. Remove the spring and note orientation.
6. Remove the lever handle.
7. Pick up a flat gear, flip, and orient the stop on the opposite side of the top post. See pictures for orientation.
8. Install the spring upside down from the original orientation and place the spring leg on the opposite side of the stop post from the original installation orientation. See pictures for orientation.

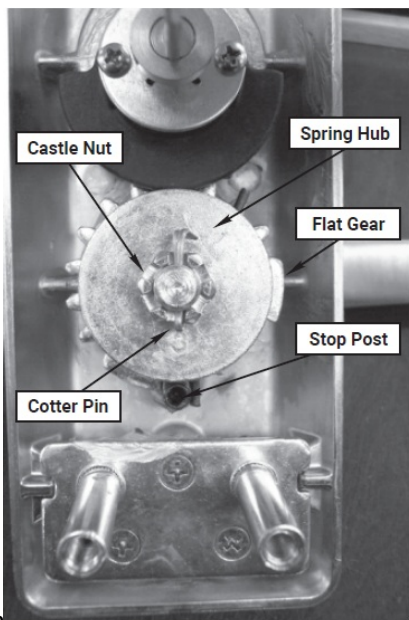


Left-Hand Reverse

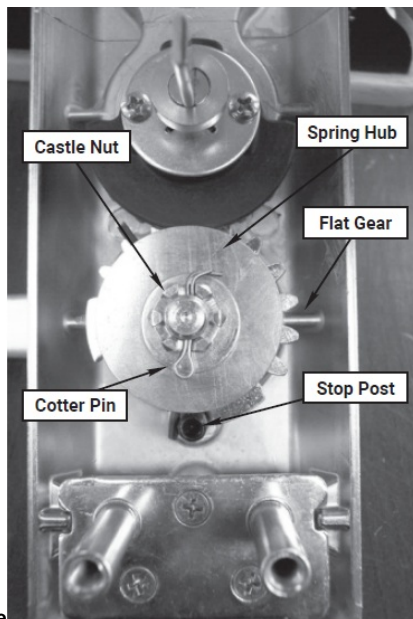

Right-Hand Reverse

9. Install the lever 180 degrees from the original position.
10. Install the spring hub with the stamped number in the 6 o'clock position.
11. Rotate the spring leg around with needle nose pliers to engage the notch in the spring hub, refer to the pictures for the reference position. Press down on the spring hub to ensure complete engagement.
12. Install washer.
13. Install the castle nut, do not over-tighten, and verify by ensuring the lever returns horizontally on its own.
14. Install cotter pin.

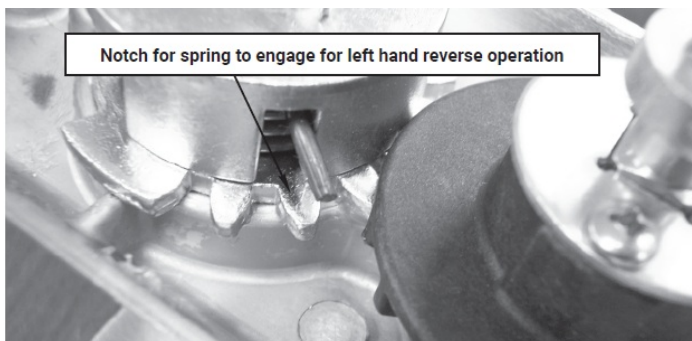


CONTACT

- 1-855-577-5078 Ext. 2
- www.accentra-assaabloy.com

Copyright © 2013, 2024, ASSA ABLOY ACCENTRA™ Access and Egress Hardware Group, Inc. All rights reserved. Reproduction in whole or in part without the express written permission of ASSA ABLOY Access and Egress Hardware Group, Inc. is prohibited.

Documents / Resources



[ASSA ABLOY 426F Exit Device Trim](#) [pdf] Installation Guide
426F, 426F Exit Device Trim, Exit Device Trim, Device Trim, Trim

References

- [Home | ASSA ABLOY ACCENTRA™, formerly Yale Commercial Locks | ASSA ABLOY ACCENTRA™, formerly Yale Commercial](#)
- [P65warnings.ca.gov](#)
- [User Manual](#)

[Manuals+](#), [Privacy Policy](#)

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.