**Noma 2 x CTI1513697**

# Noma Quick Clip C9 LED Christmas Holiday String Lights User Manual

Model: 2 x CTI1513697

## Important Safety Instructions

**READ AND FOLLOW ALL SAFETY INSTRUCTIONS.**
**SAVE THESE INSTRUCTIONS.**
This manual contains important instructions for the Noma Quick Clip C9 LED Christmas Holiday String Lights. Please read and understand all safety warnings and operating procedures before installation and use.

### General Safety Guidelines:

1. Do not use seasonal products outdoors unless marked suitable for indoor and outdoor use. When products are used in outdoor applications, connect the product to a Ground Fault Circuit Interrupting (GFCI) outlet. If one is provided, contact a qualified electrician for proper installation.
2. This seasonal product is not intended for permanent installation or use.
3. Do not mount or place near gas or electric heaters, fireplaces, candles or other similar sources of heat.
4. Do not secure the wiring of the product with staples or nails, or place on sharp hooks or nails.
5. Do not let lamps rest on the supply cord or on any wire.
6. Unplug the product when leaving the house, or when retiring for the night, or if left unattended.
7. This is an electric product - not a toy! To avoid risk of fire, burns, personal injury and electric shock it should not be played with or placed where small children can reach it.
8. Do not hang ornaments or other objects from cord, wire, or light string.
9. Do not close doors or windows on the product or extension cords as this may damage the wire insulation.
10. Do not cover the product with cloth, paper or any material not part of the product when in use.
11. This product is equipped with non-shunted type LED lamps. Do not twist or attempt to remove lamps.
12. This product employs overload protection (fuse). A blown fuse indicates an overload or short-circuit situation. If the fuse blows, unplug the product from the outlet. Also unplug any additional strings or products that may be attached to the product. Replace the fuse as per the servicing instructions (follow product marking for proper fuse rating) and check the product. If the replacement fuse blows, a short-circuit may be present and the product should be discarded.

## CAUTION:

- To reduce the risk of fire and electric shock: Do not install on trees having needles, leaves, or branch coverings of metal or materials that look like metal.
- Do not mount or support strings in a manner that can cut or damage wire insulation.




Figure 1: Detailed safety and usage instructions from the product manual.

## Product Overview

The Noma Quick Clip C9 LED Christmas Holiday String Lights are designed for both indoor and outdoor use, offering a convenient and durable lighting solution for your festive decorations. Each pack includes two 66.8-foot strings of lights, featuring 100 warm white C9 LED bulbs with innovative Quick Clip technology.

### Key Features:

- **Quick-Clip Design:** Built-in spring-loaded clips allow for simple and fast installation on various surfaces like rooflines, branches, and railings, reducing decoration time.
- **Durable Construction:** Features diamond-cut style C9 bulbs with weather-sealed sockets, ensuring resilience against harsh winter weather conditions.
- **Energy Efficient LED:** Equipped with 100 warm white LED bulbs providing a festive glow and built to last up to 10,000 hours.
- **Adjustable Light Position:** 180-degree rotation capability of the bulbs allows for easy adjustment of light direction.
- **Expandable:** Multiple strings can be connected end-to-end to cover larger areas, up to a maximum total wattage of 216W.




Figure 2: Overview of key features including customizable lighting, energy efficiency, and sturdy construction.

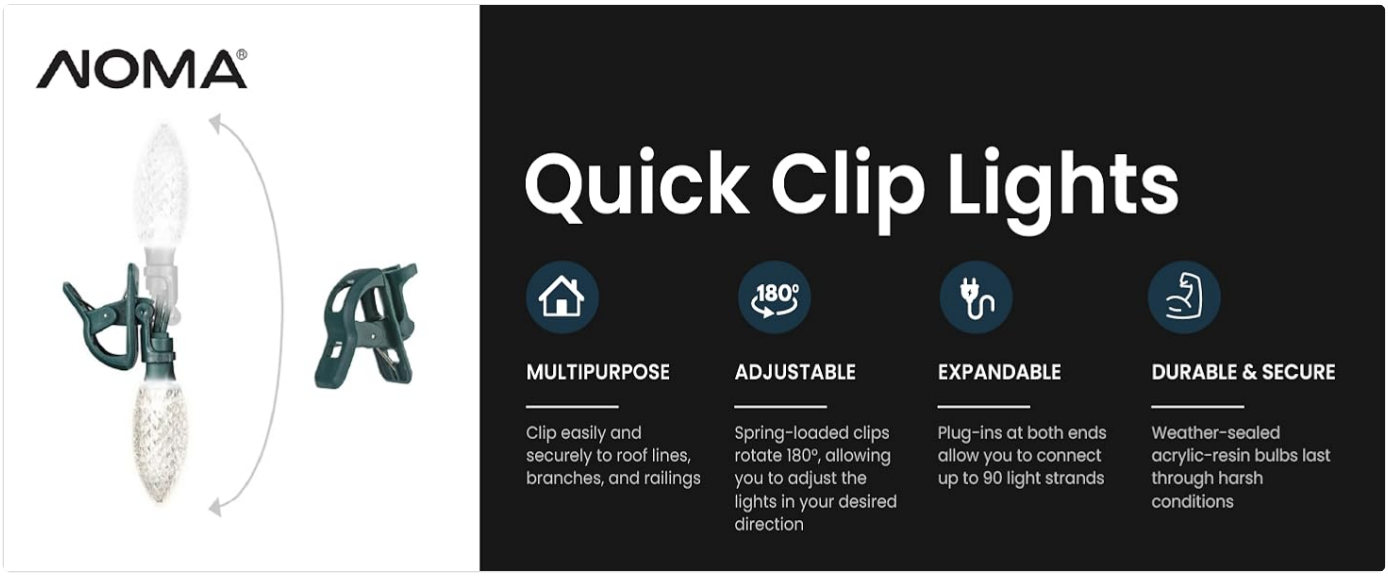



Figure 3: Visual representation of the Quick Clip Lights' multipurpose, adjustable, expandable, and durable design.

## Setup and Installation

The Noma Quick Clip lights are designed for easy and secure installation without the need for additional tools like nails or staples.

### Using the Quick Clips:

1. Identify the desired location for your lights, such as rooflines, gutters, tree branches, or railings.
2. Open the spring-loaded clip attached to each light bulb.
3. Wrap the clip around the desired surface. The clips are designed to securely hold the light string in place.
4. Adjust the light bulb's position by rotating it up to 180 degrees to achieve the desired lighting angle.



Figure 4: Close-up of a hand using the Quick Clip for easy installation.



Figure 5: Illustration of the adjustable light position and the built-in clip mechanism.




Figure 6: Example of lights installed on a gutter, demonstrating secure attachment.

### Installation Video:

Your browser does not support the video tag.

Video 1: Official NOMA Quick Clip Christmas String Lights installation guide, demonstrating the ease of setup on various surfaces.

## Operating Instructions

### Powering On:

Once installed, simply plug the light string into a standard 120V electrical outlet. For outdoor use, ensure the outlet is a Ground Fault Circuit Interrupting (GFCI) type.

### Connecting Multiple Sets:

These lights are designed to be connected end-to-end. To connect multiple strings:

- Locate the male plug on one string and the female receptacle on another.
- Securely connect the two ends.
- Do not exceed a total connected wattage of 216W. Each Noma Quick Clip C9 LED string light set consumes 2.4W. To calculate the maximum number of sets you can connect, divide 216W by 2.4W.

## Maintenance

### Fuse Replacement:

Your Noma Quick Clip lights are equipped with an overload protection fuse located in the plug. If the lights stop working, the fuse may need replacement.

1. Grasp the plug and remove it from the receptacle. Do not unplug by pulling on the cord.
2. Slide open the fuse access cover on top of the plug towards the blades.
3. Carefully remove the old fuse.
4. Replace with a new 3 Amp, 125 Volt fuse (ensure it's the correct rating).
5. Slide the fuse cover closed.
6. If the replacement fuse blows, a short-circuit may be present, and the product should be discarded.

### General Care and Storage:

- Before using or reusing, inspect the product carefully for any cut, damaged, or frayed wire insulation, cracks in lampholders, loose connections, or exposed copper wire. Discard damaged products.
- When storing, carefully remove the product from its installation location to avoid undue strain on conductors, connections, and wires.
- Store neatly in a cool, dry location protected from sunlight when not in use.

## Troubleshooting

| Problem | Possible Cause | Solution |
|---|---|---|
| Lights do not turn on. | No power to the outlet, blown fuse, loose connection, damaged wire. | Check power outlet. Inspect plug and replace fuse as per "Maintenance" section. Ensure all connections are secure. Inspect for damaged wires and discard if found. |
| Only part of the string is lit. | Loose bulb, damaged bulb, internal wiring issue. | Ensure all bulbs are securely seated. As bulbs are non-removable LED type, if a section fails, the entire string may need replacement if not covered by warranty. |
| Lights flicker. | Loose connection, unstable power supply. | Check all connections, including extension cords. Try plugging into a different outlet. |

## Specifications

| Attribute | Detail |
|---|---|
| Brand | Noma |

| Attribute | Detail |
| --- | --- |
| Model Number | 2 x CTI1513697 |
| Light Type | LED |
| Bulb Shape Size | C9 |
| Light Color | Warm White |
| Number of Bulbs | 100 per string |
| String Length | 66.8 feet (20.3 meters) per string |
| Voltage | 120 Volts |
| Wattage | 2.4 watts per string |
| Indoor/Outdoor Usage | Outdoor |
| Water Resistance Level | Water Resistant |
| Included Components | (2) 66.8-foot strings of lights |
| UPC | 193802348293 |

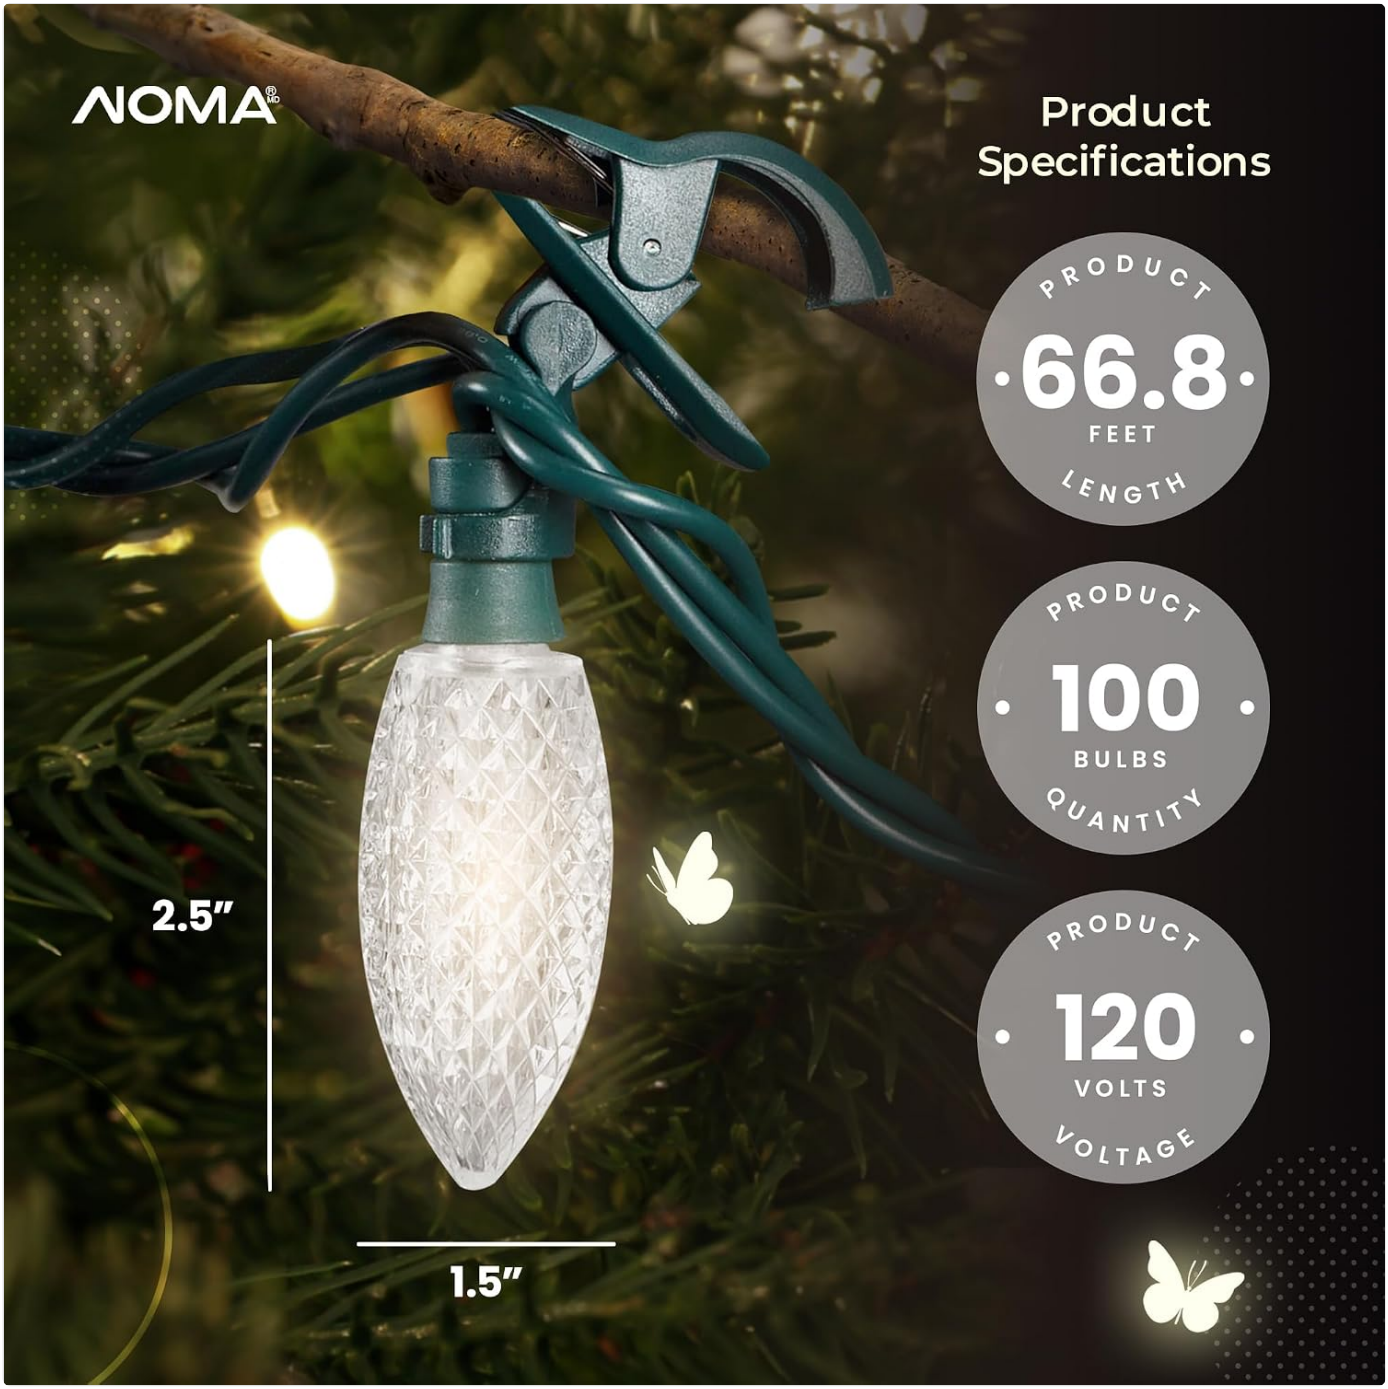



Figure 7: Visual summary of key product specifications.

Figure 8: Additional specifications including length, voltage, and wattage.

## Warranty and Support

### Limited Warranty:

This Noma product carries a **three (3) year limited warranty** against defects in workmanship and materials. If the product fails within 3 years from the date of purchase under ordinary use, it will be guaranteed against wear or breakage due to misuse or abuse when returned to the place of purchase with proof of purchase.

### Customer Support:

For any questions, concerns, or support needs regarding your Noma Quick Clip C9 LED Christmas Holiday String Lights, please

refer to the contact information provided on the product packaging or visit the official Noma website for further assistance.

© 2024 Noma. All rights reserved.
For more information, visit www.noma.com