



ATEN US3312 2-Port USB-C 4K DisplayPort KVM Switch with Remote Port Selector User Guide

[Home](#) » [Aten](#) » ATEN US3312 2-Port USB-C 4K DisplayPort KVM Switch with Remote Port Selector User Guide

Contents [[hide](#)]


- [1 ATEN US3312 2-Port USB-C 4K DisplayPort KVM Switch with Remote Port Selector](#)
- [2 Hardware Overview](#)
- [3 Installation](#)
- [4 Package Contents](#)
- [5 US3312 2-Port USB-C 4K DisplayPort KVM Switch with Remote Port Selector](#)
 - [5.1 Hardware Overview](#)
 - [5.2 Installation](#)
 - [5.3 Operation](#)
- [6 Documents / Resources](#)
 - [6.1 References](#)
- [7 Related Posts](#)




ATEN US3312 2-Port USB-C 4K DisplayPort KVM Switch with Remote Port Selector



Hardware Overview

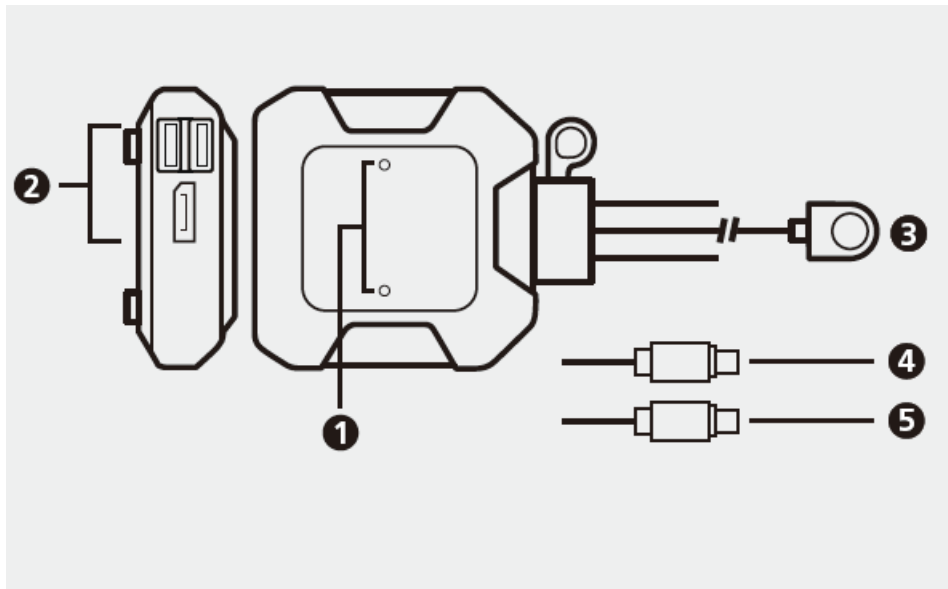

Installation

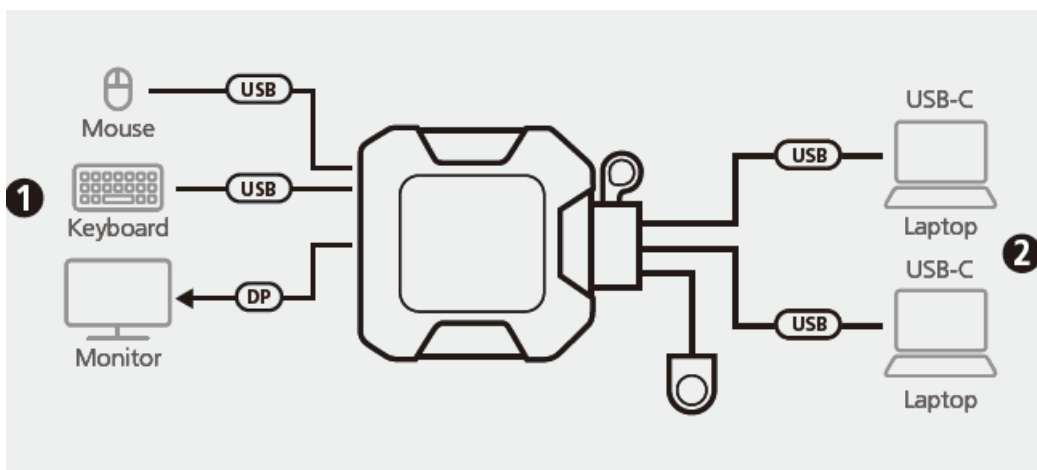

Package Contents

- 1 2-Port USB-C 4K DisplayPort KVM

- Switch with Remote Port Selector
- 1 user instructions

Support and Documentation

Notice All information, documentation, firmware, software utilities, and specifications contained in this package are subject to change without prior notification by the manufacturer.

To reduce the environmental impact of our products, ATEN documentation and software can be found online at <http://www.aten.com/download/>

Technical Support www.aten.com/support

US3312 2-Port USB-C 4K DisplayPort KVM Switch with Remote Port Selector

Hardware Overview

Front View

1. port LEDs
2. console ports
3. remote port selector
4. USB-C connector 1
5. USB-C connector 2

Installation

1. Connect the USB mouse, USB keyboard, and DisplayPort monitor into their
2. Connect the USB-C connectors of the attached KVM cables into their respective ports on the USB-C devices that you are installing.

Operation

Press the remote port selector to switch KVM control between the two computers. The port LED for the selected port lights green.

Switching Between High Speed and Normal Speed Modes

To switch between high speed and normal speed modes, press and hold the remote port selector for 5 seconds.

- High Speed Mode: The port 1 and port 2 LEDs flash once to indicate the device is set to high speed mode. This is the default setting.
- Normal Speed Mode: The port 1 and port 2 LEDs flash twice to indicate the device is set to normal speed mode.



Documents / Resources



[ATEN US3312 2-Port USB-C 4K DisplayPort KVM Switch with Remote Port Selector](#) [pdf]
User Guide

US3312 2-Port USB-C 4K DisplayPort KVM Switch with Remote Port Selector, US3312, 2-Port USB-C 4K DisplayPort KVM Switch with Remote Port Selector, Switch with Remote Port Selector, Remote Port Selector, Port Selector, Selector

References

-  [ATEN - Simply Better Connections | ATEN U.S.A.](#)
-  [Downloads | ATEN Corporate Headquarters](#)