

Scosche MSQSPBWT-SP

Scosche MSQSPBWT 3-in-1 Wireless Charging Station Instruction Manual

Model: MSQSPBWT-SP

[Setup](#)

[Operation](#)

[Maintenance](#)

[Troubleshooting](#)

[Specifications](#)

[Warranty & Support](#)

1. SETUP INSTRUCTIONS

1.1 Unboxing and Components

Carefully unpack all items from the box. The package should contain the following:

- MagicMount Base Pro PD 3-in-1 Charging Stand
- Removable 5,000 mAh Power Bank
- Removable Apple Watch Holder (*Note: Apple Watch charger sold separately*)
- AC Adapter with 5 Ft. Cord
- MagicRing Adapter

PORTABLE POWER BANK

UP TO 15W OF PORTABLE POWER

- ▶ Provides wireless charging
- ▶ Connect Apple Watch charger, phone, tablet or camera



MAGSAFE COMPATIBLE



FOLDS FLAT FOR TRAVEL



Image: All components included in the Scosche MSQSPBWT package.

1.2 Assembling the Charging Stand

1. **Unfold the Stand:** Gently unfold the chrome arm of the charging stand to its upright position.
2. **Attach Apple Watch Holder:** If you intend to charge an Apple Watch, insert your own Apple Watch charging puck into the removable Apple Watch holder. Then, slide the holder onto the designated arm of the stand. Ensure the charging cable is routed through the integrated cable management channel for a tidy setup.
3. **Insert Power Bank:** Place the removable 5,000mAh power bank into its designated slot on the base of the charging stand. It will magnetically align.

4. **Connect Power:** Plug the provided AC adapter into a wall outlet and connect the other end to the charging station's power input port.

3-IN-1 MAGNETIC WIRELESS CHARGING STAND




With Removable MagSafe Compatible Power Bank

REMOVABLE APPLE WATCH
CHARGER ADAPTER

MAGSAFE WIRELESS
PHONE CHARGER

REMOVABLE 5,000 mAh
POWER BANK

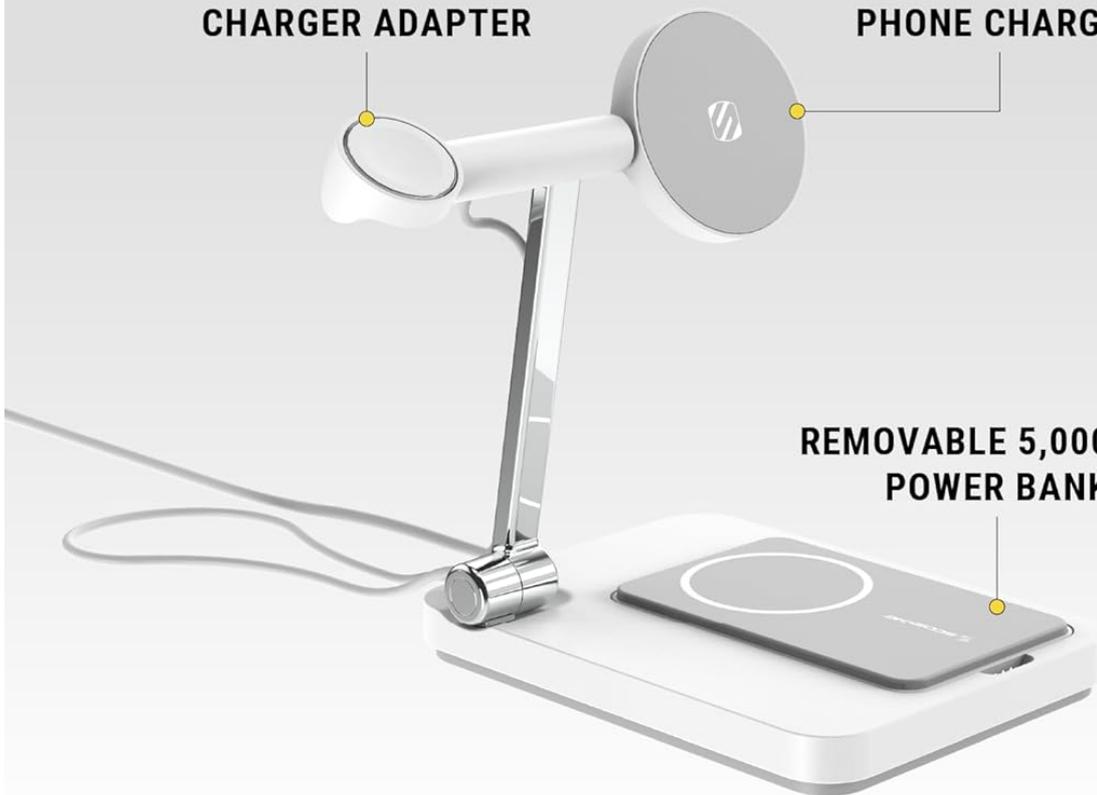

**WORKS WITH APPLE, SAMSUNG, GOOGLE,
APPLE AIRPODS, & APPLE WATCH (ALL SERIES)**

MAGNETIC CHARGER SOLD SEPARATELY

Image: Assembled charging station with an Apple Watch and iPhone in position.

1.3 Using the MagicRing Adapter (for non-MagSafe devices)

If your smartphone is not MagSafe compatible, you can use the included MagicRing Adapter to enable magnetic attachment and wireless charging.

1. **Clean Surface:** Use the provided cleaning wipe to thoroughly clean the back of your phone or phone case where the MagicRing will be applied. Ensure the surface is dry.

2. **Apply MagicRing:** Peel off the adhesive backing from the MagicRing Adapter. Carefully center the ring on the back of your phone or case and press firmly to secure it.

PHONE COMPATIBILITY



No MagSafe? No Problem!

Simply attach the included MagicRing adapter to your phone or case.

Image: Illustration of applying the MagicRing Adapter to a non-MagSafe phone case.

2. OPERATING INSTRUCTIONS

2.1 Charging Devices

- **iPhone (MagSafe Compatible):** Place your MagSafe-compatible iPhone (iPhone 12 series or newer, or

phones with MagicRing Adapter) onto the magnetic charging pad on the stand's arm. The phone will magnetically snap into place and begin charging.

- **AirPods Pro/3/2 or Second Qi-Enabled Smartphone:** Place your AirPods charging case or a second Qi-enabled smartphone onto the wireless charging pad located on the base of the stand. Ensure proper alignment for charging to initiate.
- **Apple Watch:** Place your Apple Watch onto the charging puck inserted into the removable holder. *(Your own Apple Watch charger is required and sold separately).*



Image: Multiple devices charging simultaneously on the station.

2.2 Using the Removable Power Bank

The 5,000mAh power bank can be used independently for portable charging.

- **Detaching:** Gently pull the power bank from its magnetic slot on the base.
- **Wireless Charging (MagSafe):** Attach your MagSafe-compatible iPhone directly to the power bank for on-the-go wireless charging.
- **USB-C Charging:** Use the USB-C port on the power bank to charge other Type-C devices like tablets or cameras.

WHAT'S IN THE BOX?

- ▶ MagicMount Base Pro 3-In-1 Charging Stand
- ▶ Removable 5K mAh Power Bank
- ▶ AC Adapter with 5 Ft. Cord
- ▶ Removable Apple Watch Holder



- ▶ MagicRing Adapter



Image: The removable power bank magnetically attached to an iPhone for portable charging.

2.3 Adjusting Viewing Angles and Nightlight

- **Adjustable Arm:** The chrome arm of the stand is foldable and adjustable, allowing you to set your iPhone at various viewing angles for optimal use in portrait or landscape mode.
- **LED Nightlight:** The base features an integrated LED nightlight. Touch the chrome arm to turn the nightlight on/off or to dim its brightness.



Image: The adjustable arm allows for multiple viewing angles, and the base features an LED nightlight.

3. MAINTENANCE

To ensure the longevity and optimal performance of your Scosche MSQSPBWT Wireless Charging Station, follow these maintenance guidelines:

- **Cleaning:** Use a soft, dry, lint-free cloth to clean the surface of the charging station. Avoid using abrasive cleaners, solvents, or aerosol sprays, which may damage the finish or internal components.
- **Storage:** When not in use or for travel, fold the chrome arm flat and ensure the power bank is securely docked or removed. Store in a cool, dry place away from direct sunlight and extreme temperatures.
- **Cable Care:** Avoid bending or crimping the power cable excessively. Always grasp the plug, not the cable, when disconnecting from the wall outlet or the charging station.
- **Environmental Conditions:** Do not expose the device to water, moisture, or high humidity. Keep it away from heat sources.

4. TROUBLESHOOTING

If you encounter issues with your charging station, refer to the following common solutions:

Problem	Possible Cause	Solution
Device not charging wirelessly.	Improper alignment, foreign object, or non-compatible device/case.	Ensure device is centered on the charging pad. Remove any metal objects or thick cases. Verify device is Qi-enabled or using the MagicRing Adapter.
Nightlight is too bright or not responding.	Incorrect setting or touch sensor issue.	Double-tap and hold the chrome arm to dim the brightness. Tap once to turn on/off. Ensure the arm is clean and dry.
Removable power bank not charging.	Not properly seated in the base or power bank is fully charged.	Ensure the power bank is correctly docked and making contact with the charging pins. Check the indicator lights on the power bank.
Apple Watch not charging.	Apple Watch charger not properly installed or faulty charger.	Verify your Apple Watch charging puck is correctly inserted into the holder and connected to the USB-C port. Ensure the Apple Watch is properly placed on its charger.

5. SPECIFICATIONS

Feature	Detail
Model Number	MSQSPBWT-SP
Package Dimensions	13.31 x 6.97 x 2.44 inches
Item Weight	1.95 pounds
Brand	Scosche
Connector Type	Proprietary

Feature	Detail
Compatible Devices	Smartphones (MagSafe compatible iPhone 12/13/14/15/16 series, Qi-enabled Smartphones, AirPods Pro/3/2, Apple Watch)
Included Components	MagicMount Base Pro PD 3-in-1 Charging Stand, Removable 5K mAh Power Bank, Removable Apple Watch Holder (Watch Charger Sold Separately), AC Adapter with 5 Ft. Cord, MagicRing Adapter
Special Feature	Fast Charging, Magnetic, MagSafe Compatible, Wireless Charging, LED Nightlight
Color	White
Input Voltage	12 Volts
Total USB Ports	1 (USB-C)
Wireless Charging Wattage	10W (MagSafe), 5W (AirPods/Qi pad)
Power Bank Capacity	5,000mAh
Power Bank USB-C Output	Up to 15W

6. WARRANTY & SUPPORT

6.1 Product Warranty

The Scosche MSQSPBWT Wireless Charging Station is backed by a **3-Year limited warranty** from the date of purchase. This warranty covers defects in materials and workmanship under normal use.

6.2 Technical Support

For technical assistance, troubleshooting, or warranty claims, please contact Scosche customer support. Lifetime technical support is provided for this product.

- **Website:** Visit the official Scosche website for support resources and contact information.
- **Contact:** Refer to the contact details provided in your product packaging or on the Scosche website.