Saved from manuals.plus.
Open the live page for links to other documents and user manuals.

hosabely SK500

User Manual: Hosabely SK500 Audio Mixer

Model: SK500 | Brand: Hosabely

1. Product Overview

The Hosabely SK500 is a user-friendly audio mixer designed for various applications including karaoke, live streaming, recording, and gaming. It features intuitive controls, voice changing capabilities, sound effects, and LED lighting for an enhanced audio experience.



Figure 1: Hosabely SK500 Audio Mixer with charging and audio cables.

2. Setup and Connections

The SK500 audio mixer offers multiple connection options for various devices. Ensure all connections are secure before operation.

2.1. Connection Methods

The device supports four primary connection methods:

- **Single Phone (Live):** Connect directly to a smartphone for live audio.
- **Dual Phone (Live & Acc.):** Use two phones, one for live audio and one for accompaniment.
- **Phone + PC/Laptop (Live & Acc.):** Integrate with a computer for live streaming or recording while using a phone for accompaniment.

- **PC/Laptop Only (Live):** Connect solely to a PC or laptop for audio input and output.

Note: The accompaniment can also be connected via Bluetooth 5.0. For phones without a 3.5mm jack, an adapter is required.



Figure 2: Visual guide to the four supported connection methods.

2.2. Connecting to PS5

To connect the SK500 sound card to a PS5 console, follow these steps:

1. Use the included USB-A to USB-C charging cable. Connect the USB-C end to the Southeast OTG point on the SK500.
2. Connect the USB-A end to a USB-A port on the PS5 console.
3. On the PS5, navigate to **Settings**.
4. Select **Sound**.
5. Under **Microphone**, choose **Input Device**.
6. Select **USB Headset (SK500)**.

7. Under **Audio Output**, choose **Output Device**.
8. Select **USB Headset (SK500)**.
9. Adjust the microphone level as needed to ensure the input volume is within the optimal range.

Your browser does not support the video tag.

Video 1: Demonstration of connecting the Hosabely SK500 Audio Mixer to a PS5 console and configuring audio settings.

3. Operating Instructions

The SK500 is designed for ease of use with clearly defined functional areas.

3.1. Functional Areas Overview

The mixer is organized into five main functional areas:

- **Volume Control:** Features 5 volume faders and 2 knob adjustments for precise control.
- **Indicator Area:** Displays 3 volume level indicators and a power/charging indicator.
- **Scene Mode Area:** Offers 5 reverb effects.
- **Ambient Sound Area:** Includes 16 pre-set ambient sounds.
- **Vocal Area:** Provides 6 vocal options, power switch, Bluetooth connectivity, and song skipping controls.

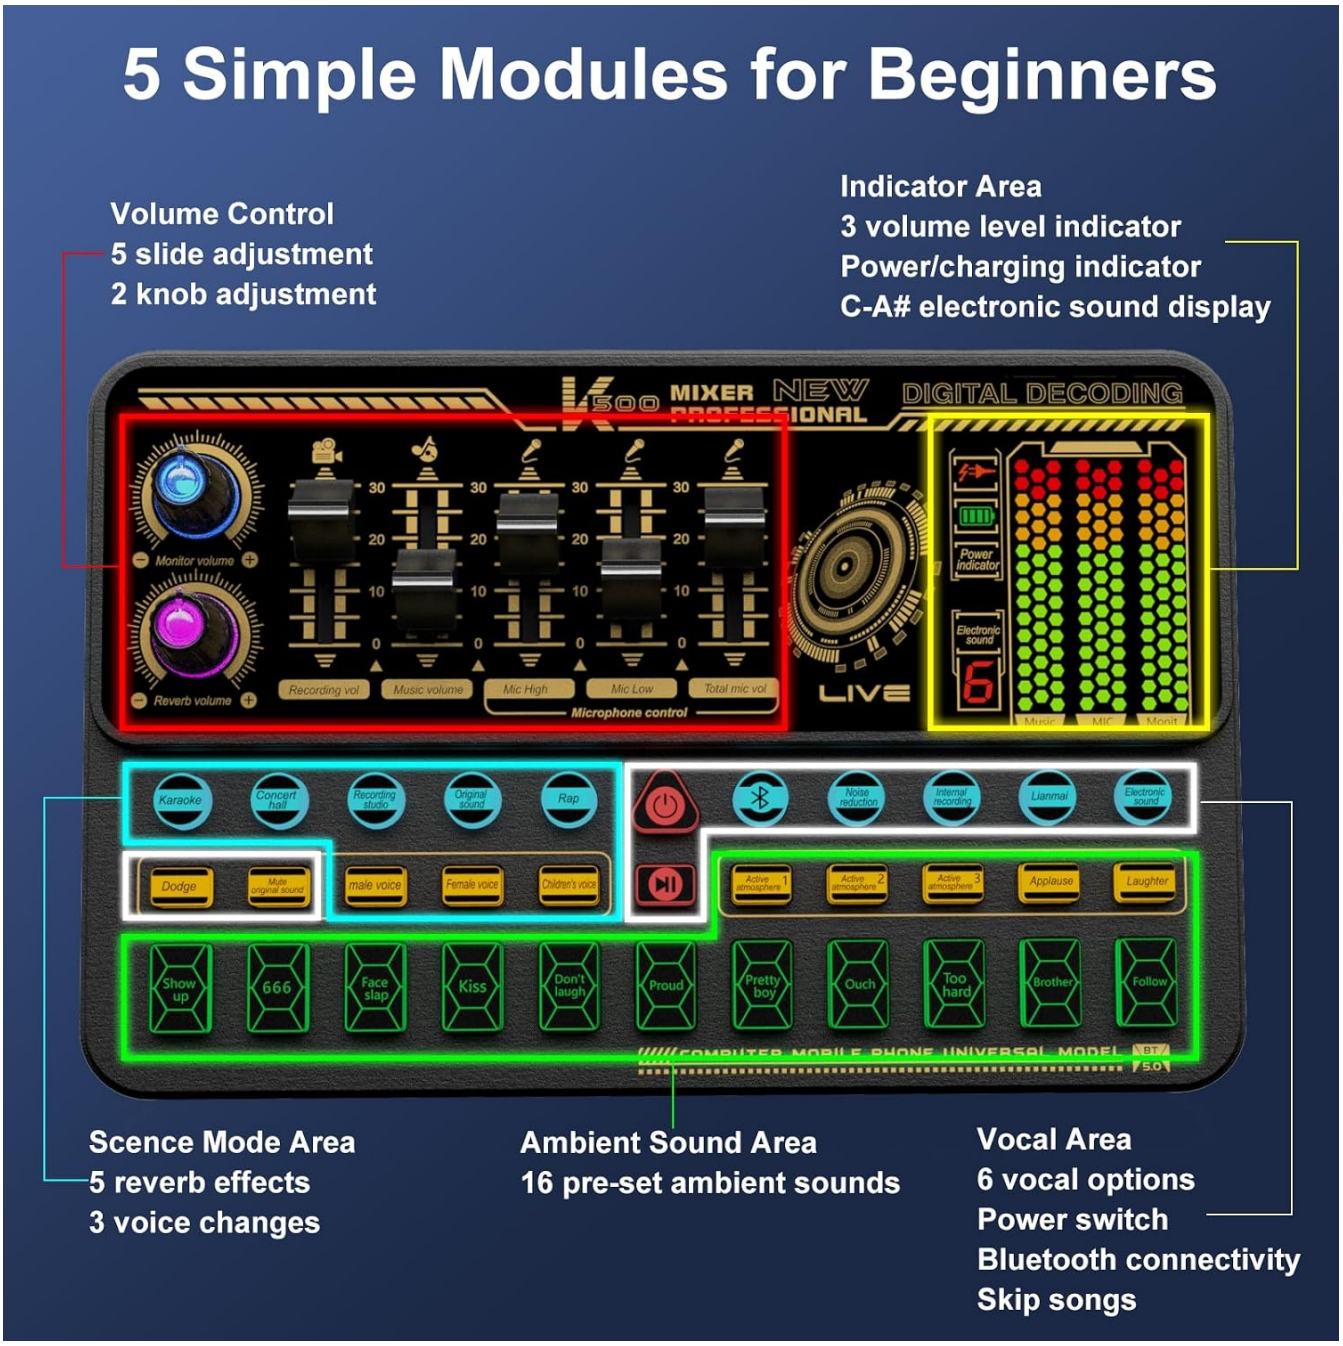


Figure 3: Layout of the SK500 Audio Mixer's functional areas.

3.2. Volume Control

Five individual volume faders allow for precise, one-handed control over microphone, accompaniment, and recording volumes. Two additional knobs control monitor and reverb volumes.



Figure 4: Detailed view of the volume controls.

3.3. Voice Changer and Sound Effects

The SK500 includes 3 voice change capabilities (male, female, child) and 16 pre-set sound effects for creative audio manipulation. Five reverb modes (echo, reverb, original sound) add depth to recordings.

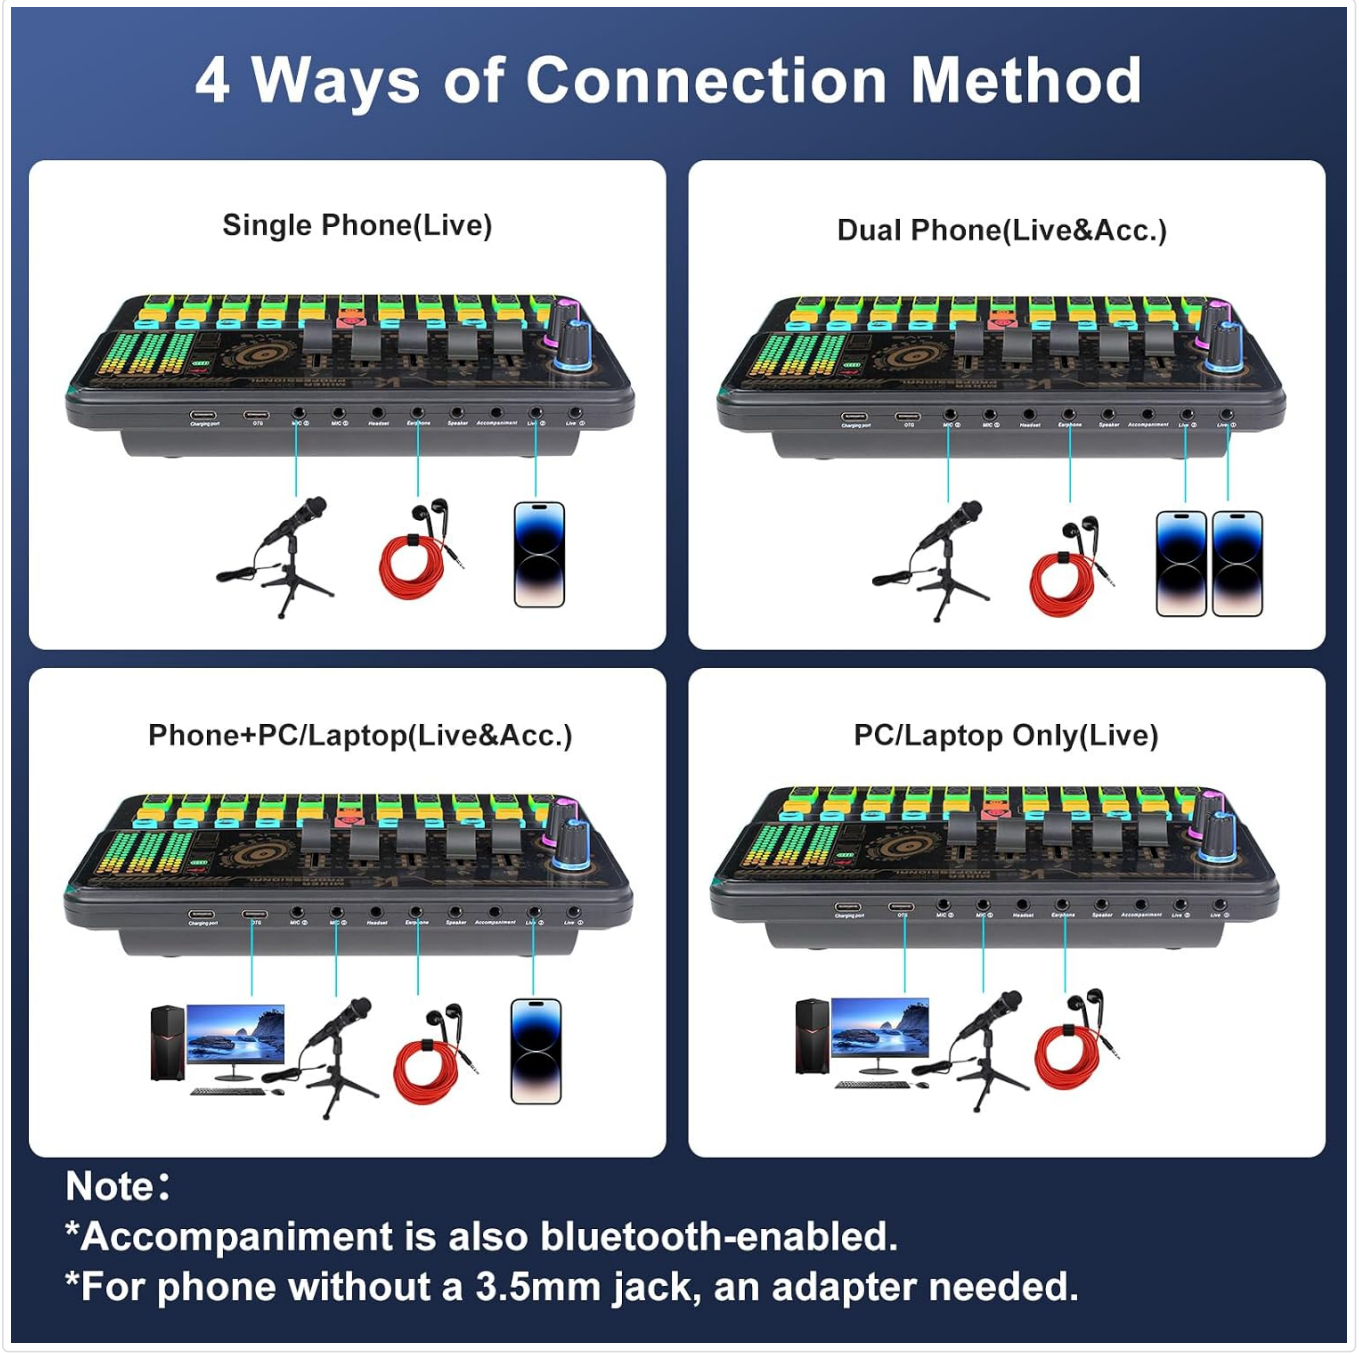


Figure 5: Voice change options.

3.4. Vocal Options and Noise Reduction

The mixer supports features like auto ducking, vocal removal, and loopback for PC. A quad-core DSP chip produces a reverse sound wave that eliminates external noise, ensuring an excellent listening experience.

3.5. LED Lighting

The integrated colorful LED lights move in sync with the music, creating a dynamic visual atmosphere for performances or streams.

4. Maintenance

Proper care ensures the longevity and optimal performance of your Hosabely SK500 audio mixer.

- **Cleaning:** Use a soft, dry cloth to clean the exterior of the device. Avoid abrasive cleaners or solvents.
- **Storage:** Store the mixer in a cool, dry place away from direct sunlight and extreme temperatures.
- **Battery Care:** The device includes a 1200mAh built-in Lithium Ion battery. For optimal battery life, avoid fully discharging the battery frequently and store it with a partial charge if not used for extended periods.
- **Handling:** Handle the device with care to prevent physical damage to faders, knobs, and ports.

5. Troubleshooting

If you encounter issues with your SK500 audio mixer, refer to the following common problems and solutions:

- **No Sound Output:**
  - Ensure all cables are securely connected to the correct ports.
  - Verify that the volume faders and knobs are not set to minimum.
  - Check the output device settings on your connected computer or console (e.g., PS5 audio output should be set to "USB Headset (SK500)").
- **Microphone Not Working:**
  - Ensure the microphone is properly connected to the mixer.
  - Verify that the microphone volume fader is not set to minimum.
  - Check the input device settings on your connected computer or console (e.g., PS5 audio input should be set to "USB Headset (SK500)").
  - **Important Note:** The SK500 is not compatible with USB microphones or XLR to XLR microphones. It also does not support Phantom power. Ensure your microphone type is compatible.
- **Distorted Sound:**
  - Adjust the input volume levels to prevent clipping or distortion.
  - Ensure the noise reduction feature is properly configured if external noise is present.

For further assistance, please refer to the official user manual PDF or contact Hosabely customer support.

6. Specifications

Feature	Detail
Brand	hosabely
Model Number	SK500
Item Weight	1.14 pounds
Product Dimensions	5.11 x 7.87 x 1.96 inches

Feature	Detail
Batteries	1 Lithium Ion batteries required.
Connectivity Technology	Plug play
Hardware Interface	USB
Compatible Devices	Laptop, Pad, PC, Smartphone
Supported Software	Support Major Live Broadcast Apps
Output Wattage	600 Milliwatts
Proficiency Level	Beginner
Operating System	Mac OS X, Windows XP, Android
Power Source	Battery Powered
Voltage	5 Volts (DC)
Wattage	5 watts
Number of Channels	2

7. Warranty and Support

Hosabely provides reliable and high-quality solutions. For any questions or issues while using the product, please feel free to contact Hosabely customer support.
An official User Manual (PDF) is available for download: Download User Manual (PDF)

© 2023 Hosabely. All rights reserved.

Ask a question about this manual

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page's manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for

conversion attribution. Privacy details.

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question

Answered questions about this manual

I only received one audio cable with my Hosabely SK500 Audio Mixer, but it should have two. How can I get the missing cable?

According to the product documentation for the Hosabely SK500 Audio Mixer, the package typically includes multiple cables to support various connection methods (such as Dual Phone Live or Phone + PC setups). If your...

Read full answer

Open the live page

https://manuals.plus/asin/B0CNMKQNL1

More documents and user manuals: **https://manuals.plus/**