



AUDIOTEK EQ500 7-Band Graphic Equalizer with Subwoofer Output and CD/Radio Selector Switch Owner's Manual

[Home](#) » [AUDIOTEK](#) » AUDIOTEK EQ500 7-Band Graphic Equalizer with Subwoofer Output and CD/Radio Selector Switch Owner's Manual 

Contents

- [1 AUDIOTEK EQ500 7-Band Graphic Equalizer with Subwoofer Output and CD/Radio Selector Switch](#)
- [2 Product Information](#)
- [3 Product Usage Instructions](#)
- [4 Using Instructions](#)
- [5 WIRING DIAGRAM](#)
- [6 FCC Statement](#)
- [7 Documents / Resources](#)
- [8 Related Posts](#)



AUDIOTEK EQ500 7-Band Graphic Equalizer with Subwoofer Output and CD/Radio Selector Switch




Product Information

The device complies with part 15 of the FCC rules and has been evaluated to meet general RF exposure requirement. It can be used in portable exposure condition without restriction. The user's authority to operate the equipment may be void if changes or modifications are made without the approval of the party responsible for compliance.

Product Usage Instructions

1. Ensure that the device is used in accordance with the FCC rules.
2. The device should not cause harmful interference and must accept any interference received, including interference that may cause undesired operation.
3. Avoid making changes or modifications to the device without the approval of the party responsible for compliance, as doing so could void the user's authority to operate the equipment.
4. The device can be used in portable exposure condition without restriction.

Using Instructions

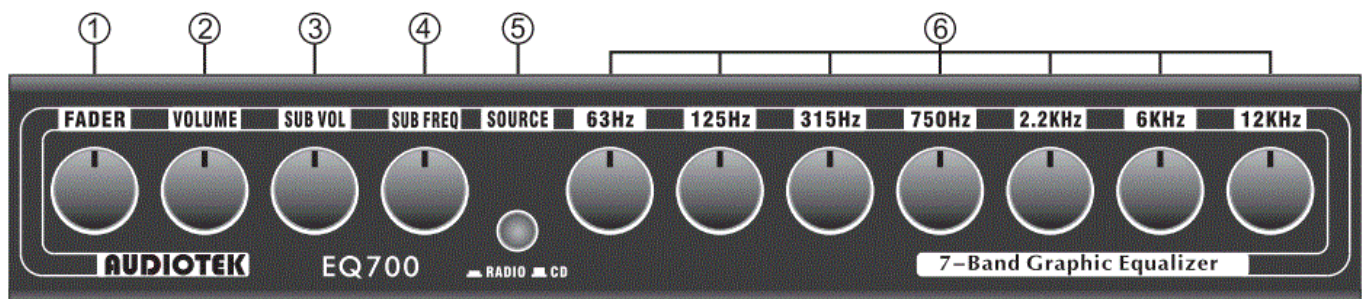

7-Band Graphic Equalizer With Subwoofer Output And Cd/Radio Selector Switch

1. FADER CONTROL
 - This control adjusts the volume between
 - The front and rear speakers in 4 speaker system


2. VOLUME CONTROL

- This control adjusts the output level.

3. USBWOOFER VOLUME

- This control adjusts output level of subwoofer.

5-Band Graphic Equalizer With Subwoofer Output And Cd/Radio Selector Switch

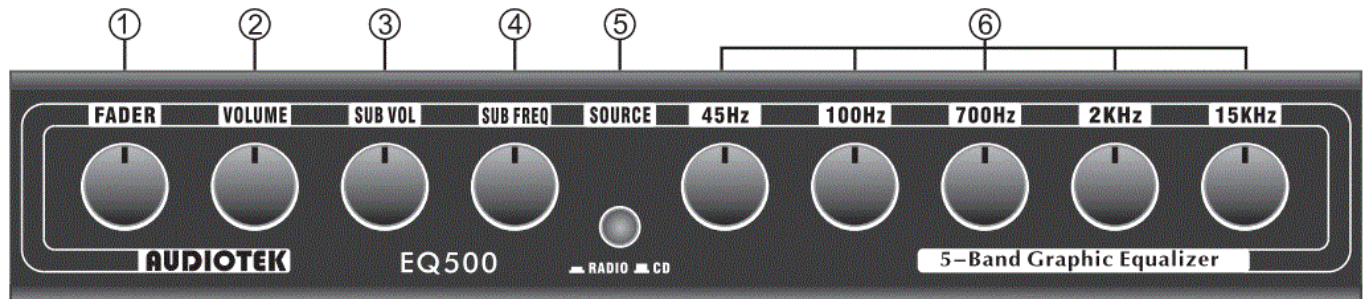

1. FADER CONTROL

- This control adjusts the volume between
- The front and rear speakers in 4 speaker system.

2. VOLUME CONTROL

- This control adjusts the output level.

3. USBWOOFER VOLUME

- This control adjusts output level of subwoofer.

4. SUBWOOFER FREQ

- This switch select subwoofer frequency 43 or 63Hz.


5. INPUT SELECTOR SWITCH

- This switch select the RADIO input or CD input.

6. PREAMP CONTROLS

- Control the frequency response of the Booster or cut, with the five tone controls each 45Hz, 100Hz, 700Hz, 2KHz, 15KHz.

WIRING DIAGRAM

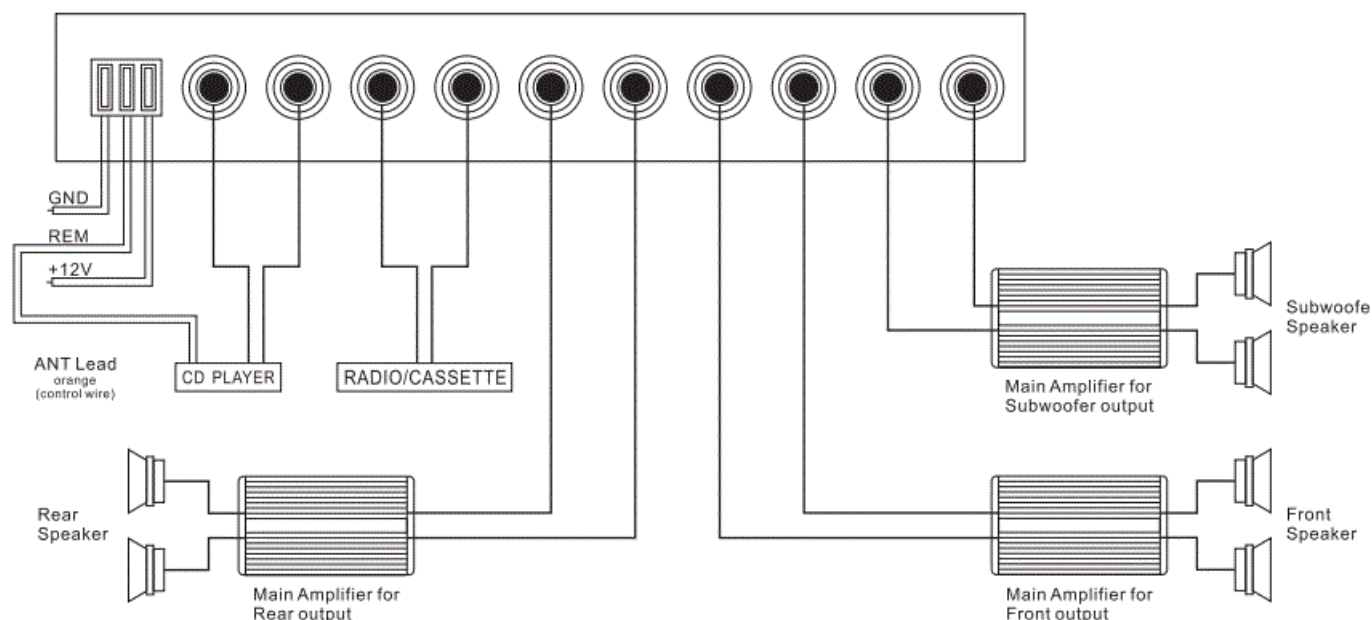

FCC Statement

This device complies with part 15 of the FCC rules. Operation is subject to the following two conditions:

1. this device may not cause harmful interference.
2. this device must accept any interference received, including interference that may cause undesired operation.


Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. Suppose this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on. In that case, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

The device has been evaluated to meet general RF exposure requirement. The device can be used in portable exposure condition without restriction.

Documents / Resources

	<p>AUDIOTEK EQ500 7-Band Graphic Equalizer with Subwoofer Output and CD/Radio Selector Switch [pdf] Owner's Manual</p> <p>2A6FC-PLE770BS, 2A6FCPLE770BS, ple770bs, EQ500, EQ700, EQ500 7-Band Graphic Equalizer with Subwoofer Output and CD Radio Selector Switch, 7-Band Graphic Equalizer with Subwoofer Output and CD Radio Selector Switch</p>
---	---