



# AUTANI A630C-ZB Zigbee Fixture Controller Owner's Manual

[Home](#) » [autani](#) » AUTANI A630C-ZB Zigbee Fixture Controller Owner's Manual 

## Contents

- [1 AUTANI A630C-ZB Zigbee Fixture Controller](#)
- [2 Description](#)
- [3 Applications](#)
- [4 Features](#)
- [5 Specifications](#)
- [6 Ordering Information](#)
- [7 Documents / Resources](#)
  - [7.1 References](#)



**AUTANI A630C-ZB Zigbee Fixture Controller**



## Description

- The Autani fixture controller provides a simple lighting control node that is powered from its attached light fixture. The versatile carrier mount allows for easy installation in any ceiling. Wireless communications using Zigbee 3.0 paired with industry leading chip sets provide a node that takes connected lighting to new heights. The controller captures data that is processed locally and transmitted over the autaniNet network, enabling the full power of Autani EnergyCenter and Autani Insights.
- This specification grade, factory installed controller has capabilities including on/off and 0-10v continuous dimming. The sensor communicates utilizing autaniNet wireless to be discovered, paired and programmed as part of our connected lighting platform. Utilize the controller in tandem with A630-M MultiSensor to create Energy code compliance for any space.

## Applications

Autani fixture controllers are suitable for renovation, upgrade, and new construction projects where individual fixture control and/or monitoring is desired. Controllers can be paired with the A630M-Multisensor.

- Private & Open Offices
- Corridors & Hallways
- Patient Care Rooms
- Retail & Grocery Stores
- K-12 Schools & universities

## Features

- Wireless Control of Luminaries on/off
- 2.4GHz, +8dBm RF, \_12dBm transmit power
- 0-10V dimming control, 50mA Sink
- Compatible with Electronic Ballasts & LED Drivers that comply with IEC60929 Annex E2, 0-10V Dimming
- Use with Dim to OFF ballasts & LED drivers

- UL244A Listed
- FCC Certified
- Zigbee 3.0
- ½" Trade Size Knockout mount
- IP50 Dust Proof Design

## Specifications

### POWER SUPPLY

- **Voltage:** 12VAC input/ 12VDC output
- **Power:** 13 watts max.

### I/O SUPPORT

- **Input Voltage:** 14VDC 10VDC min
- **Input Current:** 200mA Peak
- **Control Transmit power:** +12dBm
- **Control Receive power:** -95dBm
- **Sink Current:** 50mA
- **Absolute Voltage Range on 0-10V:** -20V, +20V
- **Dimming Range:** .2V – +10V
- **LAN:** 1×10/ 100/ 1000 Ethernet, TCP/ IP v4

### PROTOCOLS

- **Wireless:** 802.15.4 with mesh networking
- **Ethernet:** HTTP/ HTTPS
- **Security:** Internal firewall, isolated wireless and internal processors
- **UDP:** 59370, 59371, 54261
- **TCP:** 443 (required for remote access, outbound secured VPN connection)

### RADIO NETWORK (autaniNet)

- IEEE 802.15.4-2003 2.4GHz ISM
- Range: Up to 250' LOS transmit/receive


### REGULATORY APPROVALS

- UL244A, UL508
- CSAA22.2 NO 14-13
- FCC ID: V8NZRB1000152

### ENVIRONMENTAL



- **Operating Temperature:** 0° to +60°C
- **Storage Temperature:** -10° to +70°C
- **Humidity (non-condensing):** 5%-95%RH
- **Cooling:** Convection
- **Vibration Frequency:** 5-55Hz/2g, 30 min
- **Impact Resistance:** 1 g/s

## PHYSICAL

- **Dimensions (HxWxD):** 2.1 x 1.15
- **Color:** Black housing, white be with White bezel
- **Weight:** 8 grams  Indoor use only


## Ordering Information

SKU	Description
A02-51-6218-02	A630C Autani Fixture Controller <i>On-off, 0-10V dimming with flexible fixture mount options for OEM Integration. Requires purchase of the A630M Wire Harness</i>
A02-51-6218-03	A630H Autani MultiSensor Harness <i>Serial connection to the sensor on one end. Other end has 4-wire bare leads to connect to 12V Aux powered 0-10V driver.</i>
A08-01-0161-01	Zigbee Edge Connection License <i>Required for 3rd party devices in addition to Node Licenses</i>

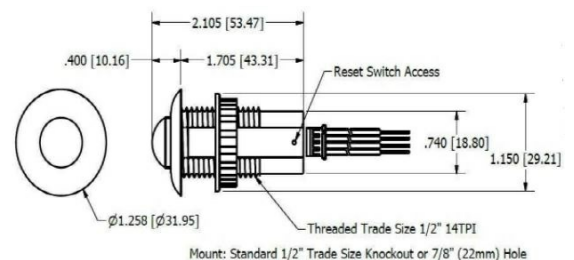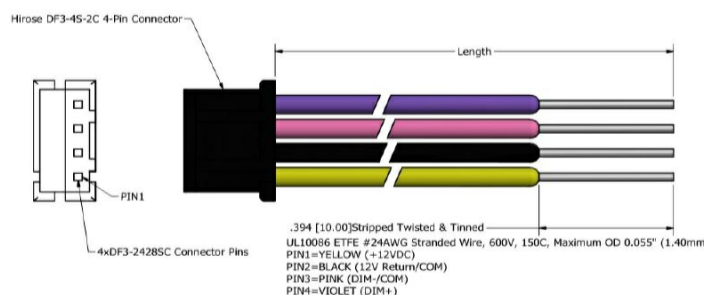

Autani, LLC [www.autani.com](http://www.autani.com). [info@autani.com](mailto:info@autani.com). 443.320.2233 7090 Columbia Gateway Drive, Suite 140, Columbia, MD 21046 Copyright 2022- Autani, LLC. All rights reserved. Specifications are subject to change without notice. This Autani product is rated for indoor use, dry area locations only. This document contains the Proprietary Information of Autani, LLC. Any use of this information without the expressed written consent of Autani, LLC is prohibited. Please refer to [www.autani.com/legal](http://www.autani.com/legal) for licensing, intellectual property, and other legal notices and information. Autani warrants its products to be free of defects in materials and workmanship for a period of three (3) years. There are no obligations or liabilities on the part of Autani for consequential damages arising out of or in connection with the use or performance of this product or other indirect damages with respect to loss of property, revenue, or profit, or cost of removal, installation or reinstallation. REV 20220715.

## Documents / Resources

	<p><a href="#">AUTANI A630C-ZB Zigbee Fixture Controller</a> [pdf] Owner's Manual A630C-ZB Zigbee Fixture Controller, A630C-ZB, Zigbee Fixture Controller, Fixture Controller, Controller</p>
---	---

## References

- [Home - Autani – The easy way to upgrade to a Smart Building](#)
- [Legal Notices - Autani](#)