



Autel Robotics M240958S Image transmission Module Instruction Manual

[Home](#) » [AUTEL ROBOTICS](#) » Autel Robotics M240958S Image transmission Module Instruction Manual 



Image transmission Module M240958S Operation Instruction Version 1.0

Contents

- [1 Overview](#)
- [2 Characteristics](#)
- [3 External dimension](#)
- [4 Documents / Resources](#)
- [5 Related Posts](#)

Overview

M240958S is an image transmission module designed and manufactured by Autel Robotics LTD., CO. The module is developed based on the 4G TD LTE technology platform and is suitable for point-to-point image and data bidirectional transmission. The module provides the function of automatically and manually selecting frequency bands, and has the super anti-interference ability.


Characteristics

- Single power supply, wide voltage input
- USB+2 serial ports
- Support four-frequency automatic selection, adaptive frequency point
- Support wireless upgrade

Automatic network repair
 Encrypted transmission
 Full industrial-grade components to meet the harsh working environment
 Product size is small and easy to integrate Specification

Parameter	Description	Comments
System	Linux/Android	
MCU	LC1881	
eMMC/Flash	16GB/16Gb	Can support 64GB eMMC
Frequency	900MHz: 902-928MHz 2.4GHz: 2400- 483.5MHz 5.2GHz: 5150-5250MHz 5.8GHz: 5725-5850MHz	1. Work in one frequency band and frequency at the same time. 2. Can manually set frequency point.
Bandwidth	1.4MHz/10MHz/20MHz	
Output Power	FCC CE	FCC: e0dBm CE: C20dBm
Connector/Definition	BM15B-GHS-TB: 12VDC USB2.0 UARTx2, Baud rate: 115200 GPIOx2	GPIO customizable
Antenna Port	IPEX one gen.	Support less than SdBi antenna
DC Power	18-26V	12V typ.
Power Consumption	C8W@FCC C6W@CE	
Work Temperature Humidity	-30E-85°C 99% No condensation	
Storage Temperature	-40°C~85°C	

External dimension

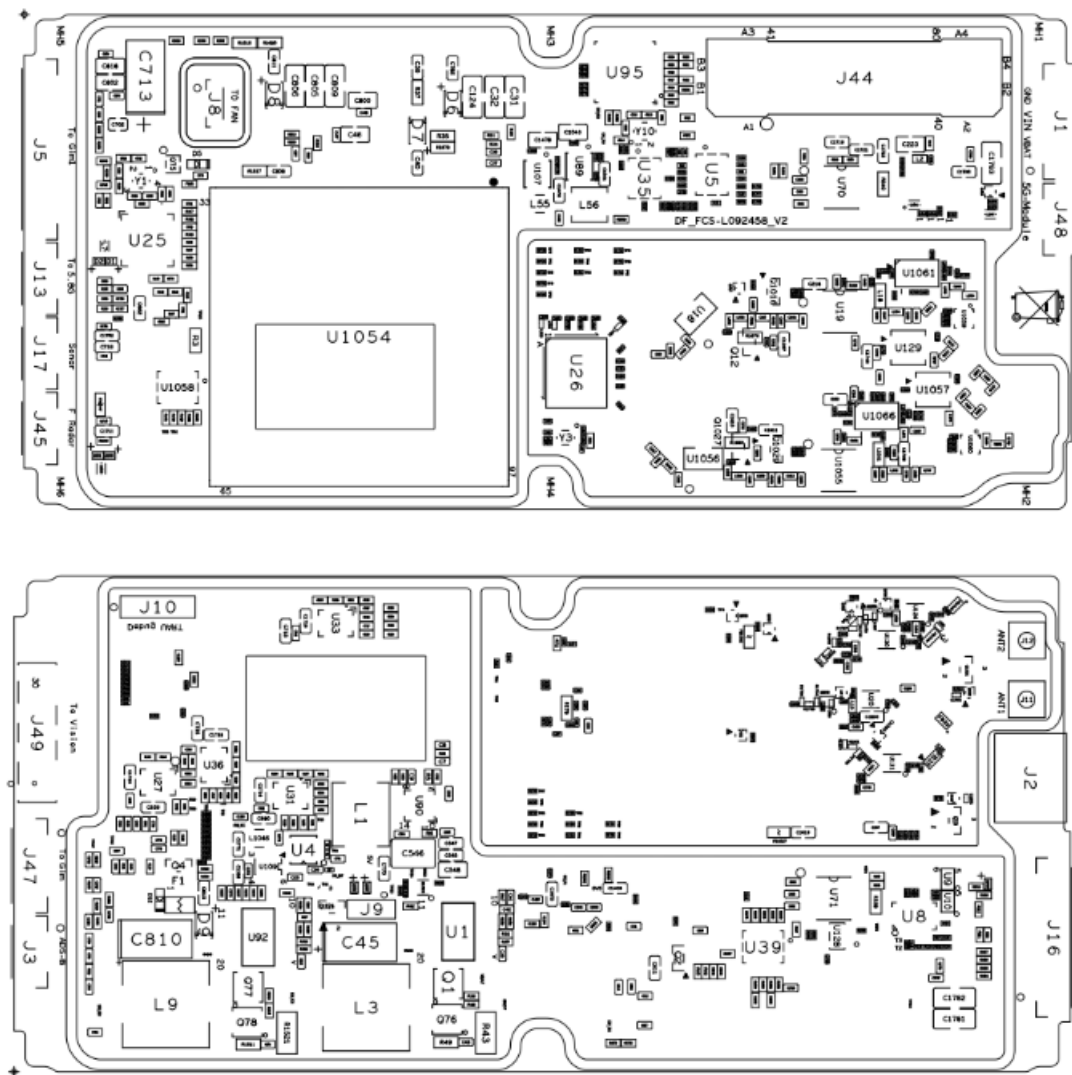

FCC Statement

1. This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:
 - (1) This device may not cause harmful interference.
 - (2) This device must accept any interference received, including interference that may cause undesired operation.
2. Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE:

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation.

This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.

- Consult the dealer or an experienced radio/TV technician for help.

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with a minimum distance of 20cm between the radiator and your body.

If the FCC identification number is not visible when the module is installed inside another device, then the outside of the device into which the module is installed must also display a label referring to the enclosed module. This exterior label can use wording such as the following: “Contains Transmitter Module

FCC ID: 2AGNTMTBS or Contains FCC


ID: 2AGNTMTBS” The host product manufacturer is responsible for compliance to any other FCC rules that apply to the host not covered by the modular transmitter grant of certification. The final host product still requires Part 15 Subpart B compliance testing with the modular transmitter installed. The final host integrator must ensure there is no instruction provided in the user manual or customer documentation indicating how to install or remove the transmitter module except such device has implemented two-way authentication between the module and the host system. When the module is installed inside another device, the user manual of the host must contain the below warning statements; 1. This device complies with Part 15 of the FCC Rules.

Operation is subject to the following two conditions:

1. This device may not cause harmful interference.
2. This device must accept any interference received, including interference that may cause undesired operation.

This equipment should be installed and operated with a minimum distance of 20cm between the radiator and your body.

Documents / Resources



[Autel Robotics M240958S Image transmission Module](#) [pdf] Instruction Manual
MTBS, 2AGNTMTBS, transmission, Module, Image transmission Module