Manuals+ — User Manuals Simplified.

AUTOMATE.
Push PRO Remote

AUTOMATE Push PRO Remote User Guide

Contents

AUTOMATE.

AUTOMATE Push PRO Remote

Product Specifications

- Part #: MT02-0101-067013 Automate | Push PRO Remote – White
- Part #: MT02-0101-050013 Automate | Push PRO Remote – Black
- Dimensions: 7-1/16 180mm
- RF Modulation: FSK
- Lock Function: Yes
- IP Rating: 40
- Transmission Distance: up to 328 ft (up to 100m) – *depending on the environment

Product Information
The Push PRO Remote is the latest advanced remote from Rollease Acmeda, designed to offer smart features in a sleek and user-friendly package. With custom timers, enhanced visuals, and rechargeable capabilities, it provides convenient control over shades and rooms.

Product Usage Instructions

1. **Custom Timers**

   The remote features 10 customizable offline timers for autonomous shade operation. To set a timer, navigate through the menu and select the desired time for shade operation.

2. **Enhanced Visuals**

   The 2.4 LCD with a backlit display allows for easy visibility in various lighting conditions. Use the Smart Wake

feature for instant control by pressing the designated buttons.

3. **Rechargeable**

   To recharge the remote, use a USB-C cable and adapter (not included). A quick 2-hour charge can provide up to 6 months of battery life.

4. **Shade Naming**

   Personalize your shades or rooms by assigning names for easy identification and control. Follow the on-screen prompts to set up shade names.

5. **Easy Configuration**

   On-screen prompts will guide you through the setup process and adjusting shade modes. Simply follow the instructions displayed on the remote.

6. **Installer Mode**

   In Installer Mode, you can pair shades, set limits, lock settings, and configure the remote according to customer preferences.

7. **ARCTM Technology**

   The remote utilizes Rollease Acmeda's proprietary ARCTM technology for seamless communication with automated motorized shading systems, providing bi-directional feedback for enhanced control.

The most advanced Push remote yet, combining smart features with a sleek, user-friendly design.

Custom Timers

Our first remote with 10customizablee, offline timers for autonomous shade operation.

Enhanced Visuals

2.4" LCD with backlit display, optional dark mode, and Smart Wake for instant control.

Rechargeable

Up to 6 months of battery life with a quick 2-hour USB-C recharge.

Shade Naming

Users can identify and control shades or rooms with personalized naming.

Easy Configuration

On-screen prompts guide you through setup and shade mode adjustment
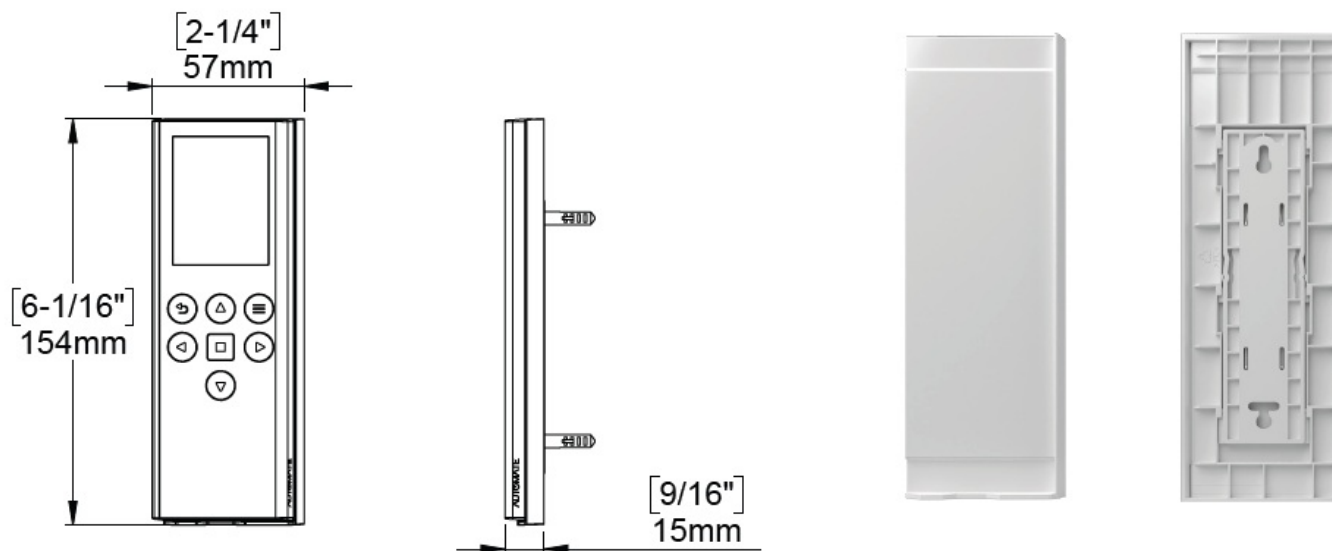

Installer Mode

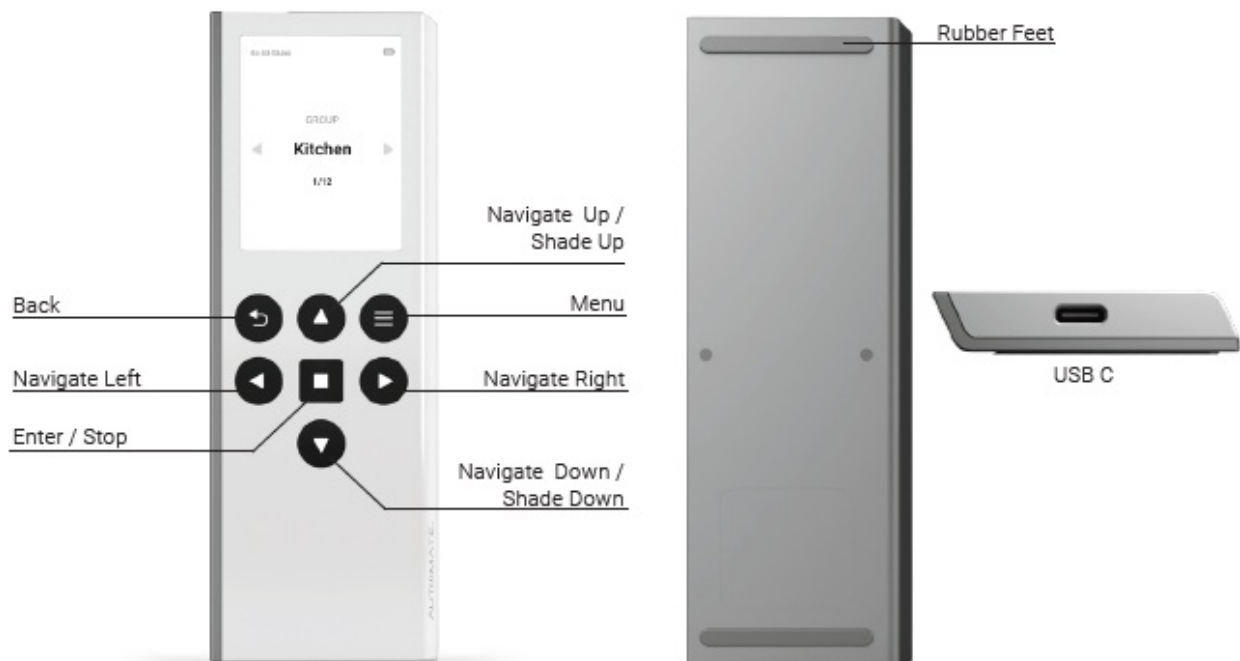Pair shades, set limits, lock, and leave with the customer.

Part #: MT02-0101-067013 Part Automate | Push PRO Remote – White #: MT02-0101-050013 Automate | Push PRO Remote – Black

Battery Type	1000mAh Li-Ion	RF Modulation	FSK
Radio Frequency	433.92 MHz	Lock Function	Yes
Transmitting Power	10 milliwatt	IP Rating	40
Operating Temperature	32°F to 113°F (0°C to 45°C)	Transmission Distance	up to 328 ft* (up to 100m*)

Dimensions Wall Cradle

Button Overview

Applications

- Roller Shade
- Roman Shade
- Cellular Shade
- Sheer Shade
- Outdoor Shade
- Awnings
- Venetian
- Drapery

What's in the Box

- 1 x Push PRO
  Remote Control
- 1 x Quick Start
  Guide
- 1 x Wall Cradle
- 1 x Screw Set

FAQS

Q: How do I pair shades with the remote?
A: To pair shades with the remote, enter Installer Mode and follow the on-screen instructions for pairing and configuration.

Q: Can I use the remote in dark environments?
A: Yes, the remote offers an optional dark mode for improved visibility in low-light conditions. Simply enable this

mode in the settings menu.

Q: How do I set up a custom timer?

A: Navigate to the timer settings on the remote, select the desired timer slot, and input the time for shade operation. Save your settings for automatic timer activation.

Documents / Resources

[**AUTOMATE Push PRO Remote**](#) [pdf] User Guide
Push PRO Remote, Push, PRO Remote, Remote

References

- ⬤ [**Rollease Acmeda - Precision in Motion**](#)
- [**User Manual**](#)