

automatic TECHNOLOGY GDO-6 EasyRoller Rolling Door Opener User Guide

<u>Home</u> » <u>automatic TECHNOLOGY</u> » automatic TECHNOLOGY GDO-6 EasyRoller Rolling Door Opener User Guide

Contents [hide


- 1 automatic TECHNOLOGY GDO-6 EasyRoller Rolling Door Opener
- **2 User Operating Controls**
- **3 Manual Door Operation**
- 4 Coding a Remote Control
- **5 Battery Replacement**
- 6 Smart Phone Control (GDO-6V4 Only)
- 7 Troubleshooting
- 8 Caring for your Opener
- 9 Need a Service Call?
- 10 Documents / Resources
 - 10.1 References
- 11 Related Posts

Automatic

automatic TECHNOLOGY GDO-6 EasyRoller Rolling Door Opener




User Operating Controls

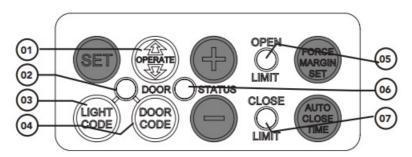

Button	Function
01	Open / Stop / Close
02	Flashes when a code is being stored or when a remote control button is pressed.
03	For storing or erasing remote control button code to switch the courtesy light on or off.
04	Is used for storing or erasing remote control buttons for door operation.
05	Flashes as the door opens and remains on when opened.
06	Illuminates when Service is due.
07	Flashes as the door closes and remains on when closed.

Manual Door Operation

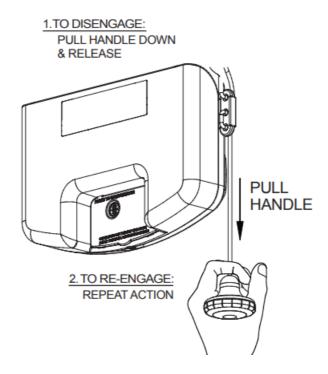

To Disengage the Opener

- 1. It is recommended to do so with the door in the closed position.
- 2. Pull the manual release cord towards the door, until you hear a click.
- 3. Move the door manually.

CAUTION: When the opener is manually disengaged, the door is no longer locked. To lock the door manually, reengage the opener after the door is closed.

Re-Engage the Opener:

- 1. Check the door has not been locked by a locking device.
- 2. Pull the manual release cord away from the door, until you hear a click.
- 3. The door will now operate from the opener.

WARNING! Please test the manual release mechanism to ensure that the manual release is easy to operate. No more than 20kg of force should be required to disengage the door using the manual release cord. If excessive force is required, contact your dealer.

Coding a Remote Control


Storing the Remote Control Code

The opener can only be operated from remote controllers that have been programmed into its memory. Up to 64 remotes (8 for GDO-6V3) can be stored in the memory

- Remove the controls cover to access the buttons.
- Press and hold the DOOR CODE button.
- Press Button 1 on the remote controller for two seconds. Release and pause for two seconds. Press the

Button 1 again for two seconds

- Release the DOOR CODE button. The remote control button is now coded, press to test.
- · Refit the controls cover




Battery Replacement

Battery Type: 1 x CR2032

Light Status	Battery Status
Solid	ОК
Flashing	Replace
No light	Replace

• To test the battery is working, press and hold a remote button. Check Light Status table to determine if battery needs replacing.



- Use finger nails to separate the remote casing to expose circuit board
- Use a non-metallic object to push the battery down through the side opening to remove the battery


WARNING! The battery is hazardous and must be kept out of reach of children. The battery can cause severe or fatal injuries within 2 hours or less if swallowed or placed inside any part of the body. If you suspect the battery has been swallowed or placed inside any part of the body, SEEK IMMEDIATE medical attention.


Smart Phone Control (GDO-6V4 Only)

Connecting to WiFi

The Smart Phone Control works via your home's WiFi network. Initial set up involves linking your phone app, smart hub and opener to your home network.

- Download the ATA App.
- Ensure the WiFi router is within range of the Smart hub.
- · Connect the Smart Hub to power.
- Go to phone settings, then WiFi and select (ATA000000).
- · Open App and tap on Start.
- · Select setup a new Smart Hub.
- Follow on screen instruction in the ATA App.
- Upon completion, test the opener operation through the ATA App.

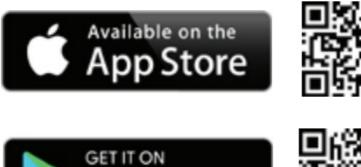





Troubleshooting

Symptom	Possible cause	Remedy
---------	----------------	--------

The opener does not work from the remote	The opener does not have power	Plug a device of similar voltage (e.g. a hairdryer) into the power point and check that it is OK
	The battery in the remote control is fl	Replace the battery
	The remote button is not programmed to operate the door.	Code in the remote control button
	Door Code LED is flashing yet the op ener is not working.	Ensure the correct button on the transmitter is being pressed.
One remote works bu t the other/s do not	Faulty remote control	Replace remote control
	Flat battery	Replace battery
The motor is running but the door remains stationary	The opener is disengaged	Re-engage the opener
The remote range va ries or is restricted	Variations are normal depending on conditions	Make sure you can see the door when you use the remote control.
	e.g. temperature or external interfere nce	
	The battery life is exhausted	Check the battery status by pressing a button (f lashing or no light requires battery to be changed)
The Courtesy light do es not work	LED has failed	Change LED.
The door reverses for no apparent reason	If Safety beams are installed they may be partially obstructed.	Ensure the beam path is not obstructed. Check the Alignment.
The door stops or mo ves very slowly.	Garage door in poor condition	Check the door's operation.
	e.g. springs may be broken.	
	(Optional Battery Back Up Accessory) The batteries may have li ttle OR no charge	Connect mains power and leave the batteries t o charge. The batteries may take 24 to 48 hours to reach their maximum charge capacity.

Caring for your Opener

Preventative servicing of your garage door and opener is important. Your garage door is made up of numerous moving parts designed to lift and lower your door safely and efficiently.

Ongoing preventative servicing ensures that your door continues to function within factory specifications, greatly reduces the risk of failure and repair bills down the track, and ensures you maintain your Warranty. Refer to your Owners Opener Handbook for your service schedule.

Refer to the installation manual for monthly testing procedures in Section 11 to ensure the garage door is fit for use.

Need a Service Call?



If the opener needs a service please call the dealer who installed the garage door opener (their contact details are usually on a sticker on the back of your garage door).

For product assistance, general enquiry or more information, please visit: ata-aust.com.au or call 1300 133 944.

Documents / Resources



<u>automatic TECHNOLOGY GDO-6 EasyRoller Rolling Door Opener</u> [pdf] User Guide GDO-6 EasyRoller, Rolling Door Opener, GDO-6 EasyRoller Rolling Door Opener, TBA, 160438_01

References

 <u>Automatic Garage Door Openers and Gate Openers - Repairs - ATA</u>

Manuals+, home privacy