

avatar CONTROLS B0C54G86JY Single Pole Smart Light **Switch User Manual**

Home » avatar CONTROLS » avatar CONTROLS B0C54G86JY Single Pole Smart Light Switch User Manual



Contents


- 1 avatar CONTROLS B0C54G86JY Single Pole Smart Light **Switch**
- 2 Specifications
- **3 Product Introduction**
- **4 Smart Light Switch Installation**
- 5 Install APP
- 6 Add devices
- 7 Troubleshooting and FAQ
- 8 How can I share my device with family
- 9 Documents / Resources



avatar CONTROLS B0C54G86JY Single Pole Smart Light Switch



Specifications



Input voltage: AC 100-24DVRated Frequency: 50/60Hz

Max.Current: 15AMax.Power: 800W

Remote Control: BluetoothWiFi: IEEE 802.11 b/g/n

• Wireless standard: Wi-Fi 2.4G

Product Introduction


• The lighting fixture controlled by the Wi-Fi in-wall 0 smart switch must not exceed 800 watts The smart switch is designed only for single-pole use and Neutral Wire required.

Indicator description



Method of restoring factory state

Press and hold the smart switch button for 20 seconds until the smart switch indicator is blinking




Remote pairing and deletion methods

One smart light switch can be paired with four rerrotes at most. One remote key can on y control one smart light switch.


How to pair the remote with sman switch?

Step 1. Press and hold the smart switch button for 5 seconds until the switch indicator change to blinking slowly Step 2. Press and hokJ the remote key "Kor "B" until the smart switch indicator stop blinking, paired successfully.

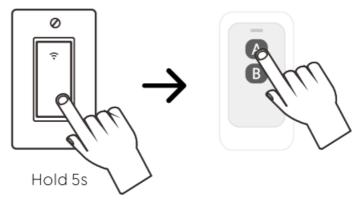

How to delete the remote with smart switch?

Press and hold the remote key for 10 seconds until the smart switch indicator flashes rapidly for 2 seconds, release your finger, then the paired kev is invaild now.

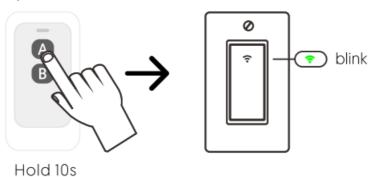


Smart Light Switch Installation

Tools you need



Combined 2gang, 3 gang Switches

The side angle of the sheet metal can be disassembled. 2gang or 3gang sw itches can be seamlessly connected toget1er. which fully conforms to the size of the home sw itch box

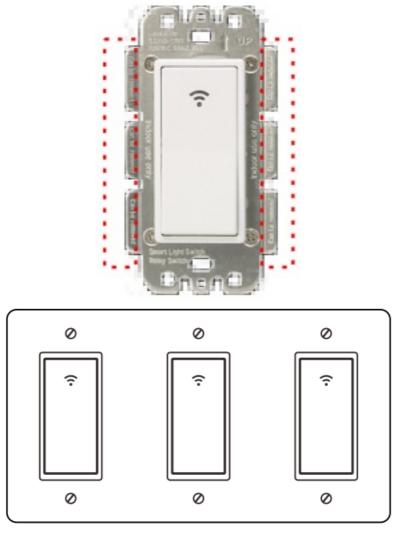

Physical Installation Before you begin:


- The AvatarControls smart light switch can replace existing single-pole light switches. NOT 3-way.
- Make sure your home has a neutral wire in the wall where you want to install the smart light switch. If
 yourhouse was built or remodeled before mid-8D's, you may not have a neutral. please try another location or
 call an electrician for help.
- Check the Wi-Fi signal on your phone at the spot w here you'll install the dimmer to make sure the Wi-Fi is

strong. It only works on your 2.4 GHz wireless band.

- Keep your mobile device close to the smart light switch until setup is complete.
- The supported maximum wattage rating is: 800W.

Step 1: Turn the power OFF.

Shut OFF power to the light switch you are replacing at the circuit breaker or fuse box



WARNING! Risk of electric shock!

Incorrect installation could be dangerous or illegal. Multip le breakers/ fuses may need to be turned OFF for safe installation. Please call a professional electrician if you are unfamiliar or uncomfortable with electrical work


Confirm that the power is turned OFF

Remove the cover plate from the existing switch. Use a voltage tester to test BOTH sides of the sw-,tch. You mayneed to turn OFF more than o ne c ircuit breaker/fuse.



Step 2: Find the neutral wires.

Unscrew the existing switch and genW pull it out of the wall. Look for the neutral wires, usually white. You need these to install the smart light switch. Continue ONLY if you have the neutra I wires.



NOTE: You may have a different color and number of neutral wires than shown


Test the neutral wires

Use a voltage tester to check that there is no power in the neutral wires from neighboring circuits. If necessary, shut OFF additional circuits untll no voltage is found.




Disconnect the neutral wires

Unscrew the w ire nut connecting the neutral wires.




Step 3: Find the ground wires.

Look for the ground w ires [usually g reen o r solfd copper] and unscrew the w ire nut connecting them,




NOTE: You may have a different color and number of ground wires than shown

Step 4: Find and label the line and load wires.



NOTE: Your exi~1ir1g wires may be in differe nt locations than shown. Never label wires while the power is turned ON.

Step 5: Connect the Smart Light Switch wires.

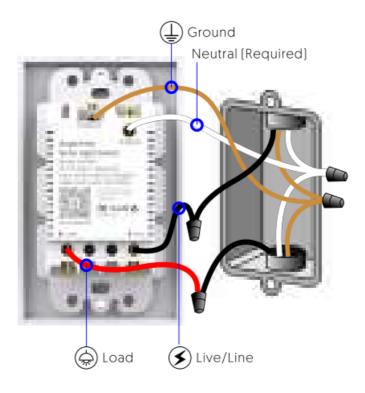


IMPORTANT, Make sure the power is turned OFF before you proceed. Your existing w ires may have d ifferent colors than those shown.

Step 6: Install the Avatar switch into the wall. Almost done! Tug on each wire nut to make sure they are secure on the wires.


Insert the Avatar swrtch into the box. It could get crowded in there.

Screw the Avatar switch into the wall and snap on the cover plate. Be careful not to over-tighten the screws.



Step 7: Turn ON the power.

Turn ON the power on your smart light switch at the fuse panel or circuit breaker panel.



Install APP

Assistant using AvatarControls App on Apple Store or Google Play marketplace. Compatible with any smart phone Of tablet including both Android and 10S systems

Download AvatarControls App

Download AvatarControls from Apple Store or Google Play Store or scan the OR code below to install the Avatar Controls APP for either iOS or Android.







Register an account in AvatarControls APP





- Open AvatarControls APP into account registration page.click on the "Register"
- At the registration page, select your region and enter the email to c reate a new account [Phone number Is not available]
- Af ter successful reg~tration. you can add device on your APP now

Add devices

Step 1. After login to AvatarContrcis APP. click on-+" to odd devices. Select "Electrical' -> "Switch" catagory, tap "Switch[Wi-Fi]' production





Step 2. Select the Device Work Wi-Fi and enter the password, then start the configuration of the device. Follow the in-APP instruction to connect the Avatar remote switch to your Wi-Fi network.

- Please make sure the Wi-Fi is st rong & 2.4 GHz wireless band.
- Keep your mobile device close to the Avatar remote switch until setup is completed.





Step 3. Active the Avatar switch to Wi-Fi connection modeAvatarControls APP supports two types of configuration modes: EZ rrode and AP mode.

EZ mode: Turn ott the luminaire first The switch indicator will be blue. Press and hold the switch button for 20 seconds and release. The indicator light will blink rapidly. [About twice per second].

AP mode: Under EZ mace. continue to press and hold the switch button fo r 20 seconds and release, the switch indicator will blink slowly. [About once 2 seconds] . If the switch can not be paired in EZ mace [blink rapid'l], please change to AP mode [blink slowfyl. After enteringthe 'Add Device· page. confirm whether the Smart LightSwitch is EZ mace.

Step 4. "Device added Successfully" will be displayed after a successful operation.





Rename the device

After the device be added successful'!, click the device description text to modify device name. The name of the device is recommended to use easy pronunciation of the English words.









Control Your Smart Switch with Amazon Alexa/Google Assistant

- 1. Tap the edit menu of the smart light switch panel
- 2. Tap the 3rd-party control icon to be operated
- 3. Sign in with your Amazon Alexa or Google Home account.









- Now you can use your voice to contro I the light:
- Alexa, turn on livingroom light
- Alexa, turn offlivin,groom light or
- Hey Google, tum 011 livin,groom light
- Hey Google, tum off livingroom light

Troubleshooting and FAQ

What should I do when I cannot turn smart lig ht switch on or off?

- Make sure your mobile devices and the smart I,;iht switch are connected to the same W1-Fi netwak.
- Make sure your smart light switch is power on.

What should I do when device configuration process has failed?

You could:

- Check whether the smart switch is powered on or not.
- Check whether your mobile device is connected to 2.4GhZ Wi-Fi network.

- Check your network connectivity. Make sure the router is working properly. + If the router is dual-band router. select 2.4G network and then add smart switch. + Enable the router's broadcasting function. + Configure the encryption method as WPA2-PSK and authorization type as AES. or set both as auto. + Check for Wi-Fi interference or relocate the smart dimmer switch to another location within the signal range. + Check whether the router's connected devices reach the amount limit. Please try to turn off some devices· Wi-Fi function and configure smart switch again. + Check if router's w ireless MAC filte ring function is enabled. Remove the device from filter list and make sure the router is not prohibiting smart switch from connection.
- Make sure the password of your Wi-Fi network e ntered in App is correct when adding smart switch.
- Make sure the smart switch is ready for App-Config: the indicator lght is quick blinking [twice per second for Quick mode co1figurauon. slow blinking lance every 3 seconds] for AP mode configlXatlon.
- · Repeat the App-Config process.
- Reset the smart switch to default setting and try to add it again.

Can I control device through 2G/3G/4G cellular network?

The smart switch and the mobile device are required to be under the same Wi-Fi network when adding the smart switch for the first time, after successfJI device configuration, you can remote'! control the device through 2G/3G/4G cellular network.

How can I share my device with family

Open your App, go to 'Home--> tap your smart switch icon ->tap ·edit menu· icon-> tap ·share Device--,tap 'Add sharing", fill your family account info then you can share the device with added fami'I members

Need Help?







Documents / Resources



avatar CONTROLS B0C54G86JY Single Pole Smart Light Switch [pdf] User Manual B0C54G86JY, B07G8WL7VF, B094HN9L81, B09SBC4H49, B0CCYK3K8G, B0C54G86JY Sin gle Pole Smart Light Switch, Single Pole Smart Light Switch, Pole Smart Light Switch, Smart Light Switch, Light Switch, Switch