



# B2B Flash Test



## AVILOO B2B Flash Test User Guide

[Home](#) » [AVILOO](#) » AVILOO B2B Flash Test User Guide 

### Contents

- 1 AVILOO B2B Flash Test
- 2 Short instructions
- 3 AVILOO BOX LED-DISPLAY
- 4 DISPLAY IN THE AVILOO WEB APP
- 5 FAQ
- 6 Documents / Resources
  - 6.1 References



### AVILOO B2B Flash Test



### Short instructions

Short instructions for the AVILOO FLASH Test – test the drive battery in 3 simple steps

### CAUTION:

Make sure the vehicle is not charging.

## FLASH TEST SET-UP

- Open the driver's door (leave it open during the test).
- VW, Skoda, Cupra and Seat Models: unlock the hood before plugging in the AVILOO Box (it is not necessary to open it).
- Plug the AVILOO Box into the OBD-2-port.
- Start the vehicle and leave the vehicle in park mode so that the systems necessary for the test remain active.
- Turn off the heating and air conditioning.
- TIP: The AVILOO WebAPP helps you locate the OBD-2-port in the vehicle.

## PERFORM FLASH TEST

- Wait for the yellow flashing one LED indicating that the AVILOO Box is ready for the Flash Test.
- Fasten the driver's seatbelt to keep the systems necessary for the test active.
- Note for all Tesla Models: switch the vehicle to drive mode and keep your foot on the brake to prevent the vehicle from moving (due to the lack of an "ignition").
- Wait for the solid green LED, which indicates that the FLASH Test is complete.





## END OF FLASH TEST

- Turn off the vehicle.
- Unbuckle the seat belt.
- Unplug the AVILOO Box.
- Close the driver's door and, if necessary, the hood.
- The AVILOO FLASH Test Report is sent by email to the email address stored for this AVILOO Box.

### Please note:

Changes or modifications not expressly approved by Aviloo could void the user's authority to operate the equipment. This is a mobile device and the user must ensure that they maintain a distance of 20 cm during operation.


## AVILOO BOX LED-DISPLAY

-  Flashing blue: indicates that the box is booting up
-  Yellow light: test in progress.
-  If red lights up: FLASH Test failed (see notes at bottom right).
-  Flashing green: data transfer.



- Greenlight: Test completed.

## DISPLAY IN THE AVILOO WEB APP

 **Initiate FLASH Test**




**1) Turn ignition on**  
and keep the doors open



**2) Do not charge your car during the test**  
and keep the heating and air conditioning off




**3) Connect your AVILOO Box**  
to the OBD interface



Tap to show OBD port location



**4) Wait until the FLASH Test initiates**  
This may take up to 1 minute.  
Please be patient.

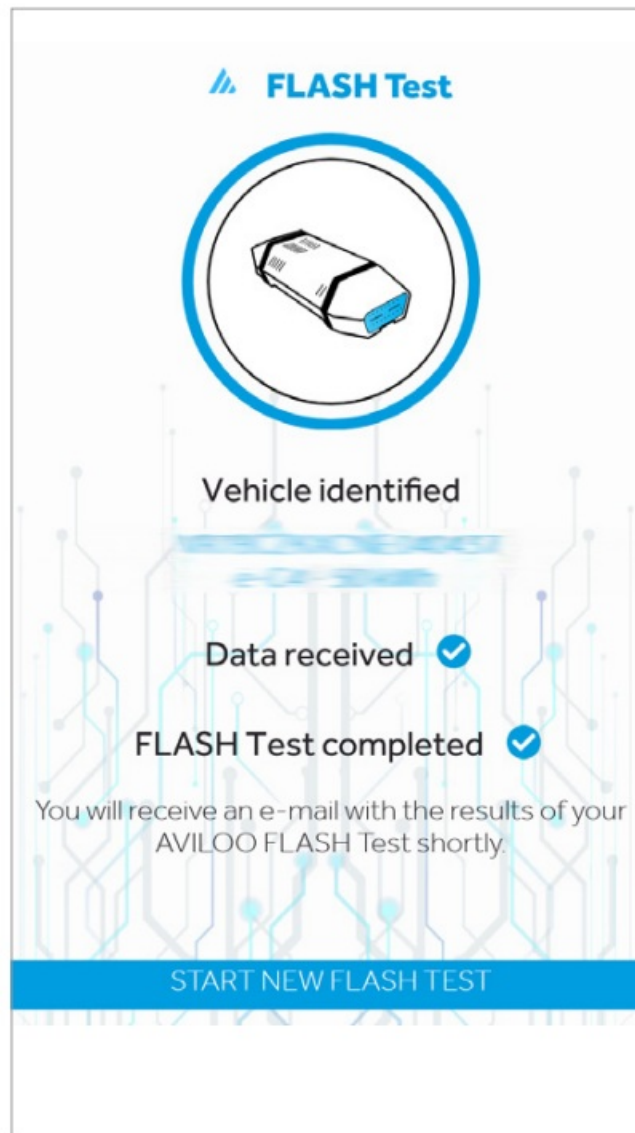

#### IMPORTANT NOTES:

- To keep the software up to date, leave the box plugged into the power supply when not in use.
- Red LED means: FLASH Test failed.

#### Take the following measures:




1. Check at <https://aviloo.link/database> whether the vehicle can be tested.
2. Repeat the FLASH Test according to the instructions.
3. Contact AVILOO Customer Support.

#### FAQ

- **Q: What should I do if the FLASH Test fails?**

- A: If the FLASH Test fails, refer to the notes at the bottom right of the AVILOO box for troubleshooting steps. If issues persist, contact AVILOO Customer Support.

## Documents / Resources

	<a href="#">AVILOO B2B Flash Test</a> [pdf] User Guide B2B, B2B Flash Test, Flash Test, Test
---	---

## References

-  [Aviloo Database - AVILOO Batteriediagnose](#)
- [User Manual](#)

[Manuals+](#), [Privacy Policy](#)

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.