

[Manuals.plus](#) /

> [hosabely](#) /

> Hosabely Audio Mixer SK600-CC User Manual

hosabely SK600-CC

Hosabely Audio Mixer with Effects

Model: SK600-CC

INTRODUCTION

The Hosabely SK600-CC Audio Mixer is a versatile external sound card designed to enhance your audio experience for various applications, including DJing, music studio recording, karaoke, podcasting, live streaming on platforms like TikTok and YouTube, and gaming. It features a range of sound effects, voice changing capabilities, and intuitive controls to help you produce unique and personalized content.



Figure 1: Front view of the Hosabely SK600-CC Audio Mixer, showcasing its control panel and LED lights.

SETUP GUIDE

Connecting to a Smartphone

Follow these steps to connect your SK600-CC Audio Mixer to a smartphone:

1. Press and hold the power switch button for 5 seconds to turn on the mixer. The Bluetooth indicator will flash, indicating it's ready for pairing.
2. Insert one end of the Type-C to Type-C USB cable into the OTG port on the mixer.
3. Connect the other end of the Type-C to Type-C USB cable to your smartphone's USB port.
4. Insert your microphone into any available MIC port on the mixer.
5. Plug your earphone into the EARPHONE port. *Note: Avoid using headsets with built-in microphones to prevent audio echoing.*
6. On your smartphone, turn on Bluetooth and select "K600" from the list of available devices to connect.

Your browser does not support the video tag.

Video 1: A demonstration of connecting the Hosabely SK600 audio mixer to a smartphone using a Type-C cable.

Connecting to a PC/Laptop

To connect your SK600-CC Audio Mixer to a PC or laptop:

1. Press and hold the power switch button for 5 seconds to turn on the mixer. The Bluetooth indicator will flash.
2. Connect the charging cable (USB-A to Type-C) to the Charge/PC/OTG port on the mixer.
3. Plug the USB-A end of the cable into a USB port on your laptop or PC.
4. Insert your microphone into any available MIC port on the mixer.
5. Plug your earphone into the EARPHONE port. *Note: Avoid using headsets with built-in microphones to prevent audio echoing.*
6. On your PC/laptop, ensure the K600 driver is detected in both the microphone input and speaker output settings.

Your browser does not support the video tag.

Video 2: A demonstration of connecting the Hosabely SK600 audio mixer to a PC or laptop.

Bluetooth Digital Audio Mixer

Multi-Device And Multi-System Compatible Use



Android



Windows



ios



PC

Laptop

Tablet/ipad

Android/IOS

Figure 2: The Hosabely SK600-CC mixer demonstrating its plug-and-play connectivity with both smartphones and laptops using Type-C cables for stable data delivery.

INTELLIGENT NOISE REDUCTION

Focus on your sound, away from background noise



Figure 3: The Hosabely SK600-CC mixer highlighting its multi-device and multi-system compatibility, including Android, Windows, iOS, PC, Laptop, and Tablet/iPad.

OPERATING INSTRUCTIONS

The SK600-CC Audio Mixer offers a variety of features to customize your audio output:

3 Voice Changes & Other Voice Options

13 Pre-set Ambient Sounds

5 Reverb Effects

8 Knob Volume Controls

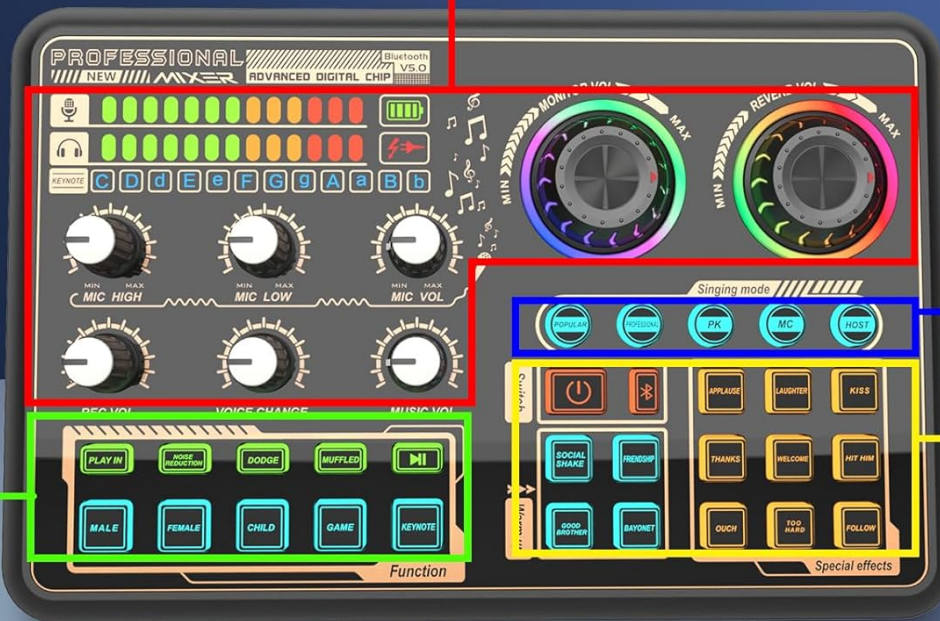


Figure 4: Overview of the Hosabely SK600-CC control panel, indicating areas for voice changes, pre-set ambient sounds, reverb effects, and knob volume controls.

Voice Changer Functions

Transform your voice with 3 different voice changes: male, female, or child-like tones. You can also adjust the pitch of each voice using the dedicated voice change knob for varied effects.

BUILT-IN BATTERY FOR MAXIMUM MOBILITY

Start podcasting anything, anywhere

1200mAh

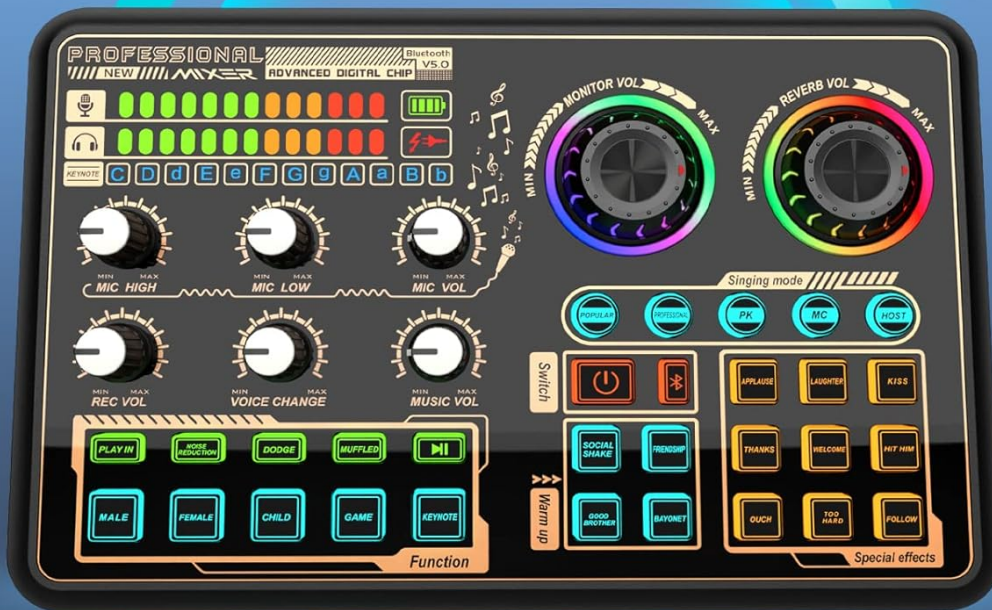


Figure 5: Close-up of the voice change section on the Hosabely SK600-CC, illustrating the adjustable pitch knob and the three voice options: Male, Child, and Female.

Karaoke and Reverb Effects

The mixer provides powerful 5H karaoke singing capabilities. Modify and enhance your voice using 5 different reverb effects. Adjust the reverb volume knob to achieve your desired sound.

Live Sound Effects

Utilize 13 vivid live sound effects to enhance the atmosphere during your live streams or recordings. Features include noise reduction, dodge, muffled, and play-in functions to improve overall audio quality.

ADJUSTABLE SOUND PITCHES SUPPLEMENT TO VOICE CHANGES



3 Fancy voice change effects

Figure 6: A hand pressing the 'Noise Reduction' button on the Hosabely SK600-CC, indicating its intelligent noise reduction feature for clearer audio.

LED Lights

The mixer features colorful LED breathing lights that flash in time with your talking or singing, adding a stylish visual element to your setup.



Figure 7: The Hosabely SK600-CC Audio Mixer showcasing its vibrant, multi-color LED breathing lights, which synchronize with audio input.

Battery Information

Equipped with a 1200mAh built-in battery, the mixer provides approximately 4-5 hours of continuous use, offering maximum mobility for podcasting, gaming, or music recording anywhere.



Figure 8: The Hosabely SK600-CC Audio Mixer displaying its 1200mAh battery capacity, emphasizing its portability for on-the-go use.

MAINTENANCE

To ensure the longevity and optimal performance of your Hosabely SK600-CC Audio Mixer, follow these maintenance guidelines:

- **Cleaning:** Use a soft, dry cloth to wipe down the surface of the mixer. Avoid using abrasive cleaners, solvents, or strong chemicals, as they may damage the finish or internal components.
- **Storage:** Store the mixer in a cool, dry place away from direct sunlight, extreme temperatures, and high humidity. When not in use for extended periods, it is recommended to fully charge the battery before storage.
- **Handling:** Handle the mixer with care to prevent drops or impacts, which could damage the internal circuitry or external casing.
- **Cable Management:** Ensure all cables are connected securely and are not bent or kinked excessively to prevent damage to the ports or cables themselves.

TROUBLESHOOTING

If you encounter any issues with your Hosabely SK600-CC Audio Mixer, please refer to the following common solutions:

- **Microphone Compatibility:** Please note that the mixer does not include a microphone. It is not compatible with USB microphones or XLR to XLR microphones. Ensure you are using a compatible 3.5mm microphone.
- **Phantom Power:** The mixer does not support Phantom power. If your microphone requires Phantom power, an external power source will be necessary.
- **Audio Echoing:** To avoid echoing during use, please do not use a headset with a built-in microphone. Use separate headphones and a dedicated microphone.
- **No Sound Output/Input:** Double-check all cable connections to ensure they are securely plugged into the correct ports on both the mixer and your connected device (smartphone/PC). Verify that the volume knobs on the mixer are adjusted appropriately.
- **Bluetooth Connection Issues:** Ensure the mixer is powered on and its Bluetooth indicator is flashing. On your device, turn Bluetooth off and on again, then try reconnecting to "K600".

If you continue to experience problems, please refer to the Warranty and Support section for further assistance.

SPECIFICATIONS

Feature	Specification
Brand	hosabely
Model Number	SK600-CC
Item Weight	1.28 pounds (0.58 Kilograms)
Package Dimensions	10.94 x 6.89 x 2.24 inches
Country of Origin	China
Batteries	1 Lithium Ion battery required
Battery Type	Lithium Ion
Power Source	Battery Powered
Number of Channels	4
Connectivity Technology	USB
Date First Available	December 14, 2023

WARRANTY AND SUPPORT

For detailed warranty information and further assistance, please refer to the official user manual or contact Hosabely customer support.

You can download the full User Manual in PDF format here [User Manual \(PDF\)](#)

If you have any questions or issues while using your Hosabely SK600-CC Audio Mixer, please feel free to contact us.

