

AXXESS AXDI-GM3 Wiring Interface



AXXESS AXDI-GM3 Wiring Interface Installation Guide

[Home](#) » [AXXESS](#) » AXXESS AXDI-GM3 Wiring Interface Installation Guide 

Contents

- 1 AXXESS AXDI-GM3 Wiring Interface
- 2 Installation:
 - 2.1 INTERFACE FEATURES
 - 2.2 INTERFACE COMPONENTS
 - 2.3 CONNECTIONS: LD-LCGM-03 DIAGRAM
 - 2.4 INSTALLATION
 - 2.5 PROGRAMMING
- 3 Documents / Resources
 - 3.1 References
- 4 Related Posts



AXXESS AXDI-GM3 Wiring Interface



Specifications

- Product Model: AXDI-GM3
- Applications: Cadillac Catera (1997-2001), Deville (1996-1999), Cadillac Chime Interface (1996-2005)
- Compatible with: Deville (2000-2005), Seville (1996-1997), Eldorado (1996-2002), Seville (1998-2004) –
*Factory amp bypass required for some vehicles
- Manufacturer: AxxessInterfaces

Installation:

1. Before starting the installation process, ensure the key is out of the ignition and disconnect the negative battery terminal.
2. Refer to the provided LD-LCGM-03 diagram for vehicle connector and interface connections.
3. Connect the aftermarket radio based on the radio connections diagram.
4. Ensure all connections are secure before reconnecting the battery.

programming

Programming instructions are not provided in the text. Please refer to the detailed information on AxxessInterfaces.com or contact Tech Support for assistance.

FAQ

Q: How can I get technical support for the AXDI-GM3 product?

A: You can contact the Tech Support line at [386-257-1187](tel:386-257-1187) or via email at techsupport@metra-autosound.com
Tech Support hours are Monday to Friday: 9:00 AM – 7:00 PM, Saturday: 10:00 AM – 5:00 PM, and Sunday: 10:00 AM – 4:00 PM.

Cadillac Chime Interface 1996-2005

INTERFACE FEATURES

- Provides accessory power (12-volt 10-amp)
- Retains R.A.P. (Retained Accessory Power)
- Provides NAV outputs (parking brake, reverse, and speed sense)
- Used in non-amplified models, or when bypassing a factory amplifier
- Used in models without OnStar® or when not retaining OnStar®
- Retains all warning chimes
- High level speaker input
- Retains balance and fade
- Micro "B" USB updatable

INTERFACE COMPONENTS

- AXDI-GM3 interface
- LD-LCGM-03 harness

APPLICATIONS

Cadillac

- Catera..... 1997-2001
- Deville1996-1999
- Deville*2000-2005
- Eldorado.....1996-2002
- Seville.....1996-1997
- Seville*1998-2004

*Note: You must bypass the factory amp in these vehicles to use this interface


TOOLS & INSTALLATION ACCESSORIES REQUIRED

- Cutting tool
- Tape
- Crimping tool
- Connectors (i.e. butt-connectors, bell caps, etc.)

Visit AxxessInterfaces.com for more detailed information about the product and up-to-date vehicle-specific applications

ATTENTION: With the key out of the ignition, disconnect the negative battery terminal before installing this product. Ensure that all installation connections, especially the air bag indicator lights, are plugged in before reconnecting the battery or cycling the ignition to test this product. NOTE: Refer also to the instructions included with the aftermarket accessory before installing this device.

CONNECTIONS: LD-LCGM-03 DIAGRAM

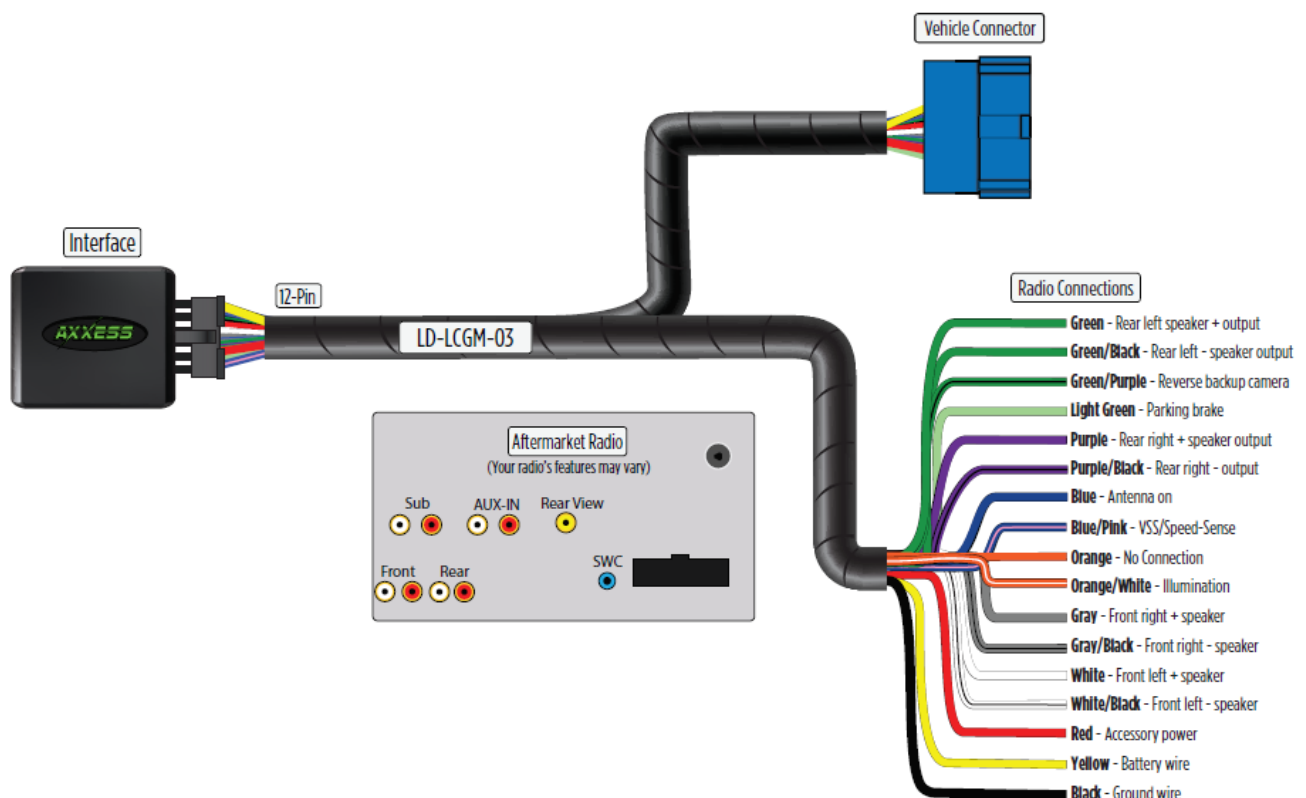

INSTALLATION

With the key in the off position

- Connect the LD-LCGM-03 harness into the interface, and then to the wiring harness in the vehicle.

PROGRAMMING

Attention! If the interface loses power for any reason, the following steps will need to be performed again. Also, if installing an AXSWC connect it after you initialize and test the interface/radio, with the key in the off position.

- Turn the key (or push-to-start button) to the ignition position and wait until the radio comes on.
Note: If the radio does not come on within 60 seconds, turn the key to the off position, disconnect the interface, check all connections, reconnect the interface, and then try again.
- Turn the key to the off position, and then to the accessory position. Test all functions of the installation for proper operation, before reassembling the dash.

Having difficulties? We're here to help.

Contact our Tech Support line at: [386-257-1187](tel:386-257-1187) Or via email at: techsupport@metra-autosound.com

Tech Support Hours (Eastern Standard Time)

- Monday – Friday: 9:00 AM – 7:00 PM
- Saturday: 10:00 AM – 5:00 PM
- Sunday: 10:00 AM – 4:00 PM



KNOWLEDGE IS POWER

Enhance your installation and fabrication skills by enrolling in the most recognized and respected mobile electronics school in our industry.

Log onto www.installerinstitute.edu or call [386-672-5771](tel:386-672-5771) for more information and take steps toward a better tomorrow.

Metra recommends MECP certified technicians



Documents / Resources



[AXXESS AXDI-GM3 Wiring Interface](#) [pdf] Installation Guide
AXDI-GM3, AXDI-GM3 Wiring Interface, Wiring Interface, Interface

References

-  [Auto Sound Company Inc - Aftermarket Vehicle Accessory Specialists](#)
-  [Axxess Integrate - Comprehensive Interface Products for Vehicle Upgrades](#)
- [User Manual](#)

[Manuals+](#), [Privacy Policy](#)

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.