

AXXESS
AXDI-VET1
Corvette
Amplifier
Interface



AXXESS AXDI-VET1 Corvette Amplifier Interface Installation Guide

[Home](#) » [AXXESS](#) » AXXESS AXDI-VET1 Corvette Amplifier Interface Installation Guide 

Contents

- [1 AXXESS AXDI-VET1 Corvette Amplifier Interface](#)
- [2 CONNECTIONS LD-AX-XSVI-GM5 DIAGRAM](#)
- [3 INSTALLATION](#)
- [4 PROGRAMMING](#)
- [5 Specifications](#)
- [6 Product Usage Instructions](#)
- [7 FAQ](#)
- [8 Documents / Resources](#)
 - [8.1 References](#)



AXXESS AXDI-VET1 Corvette Amplifier Interface



INTERFACE COMPONENTS

- CHEVROLET

APPLICATIONS

Chevrolet

- Corvette.....1997-2004

TOOLS & INSTALLATION ACCESSORIES REQUIRED


- Crimping tool and connectors, or solder gun, solder, and heat shrink
- Tape
- Wire cutter
- Zip-ties

Visit AxxessInterfaces.com for more detailed information about the product and up-to-date vehicle-specific applications

ATTENTION: With the key out of the ignition, disconnect the negative battery terminal before installing this product. Ensure that all installation connections, especially the air bag indicator lights, are plugged in before reconnecting the battery or cycling the ignition to test this product.

NOTE: Refer also to the instructions included with the aftermarket accessory before installing this device.

CONNECTIONS LD-AX-XSVI-GM5 DIAGRAM

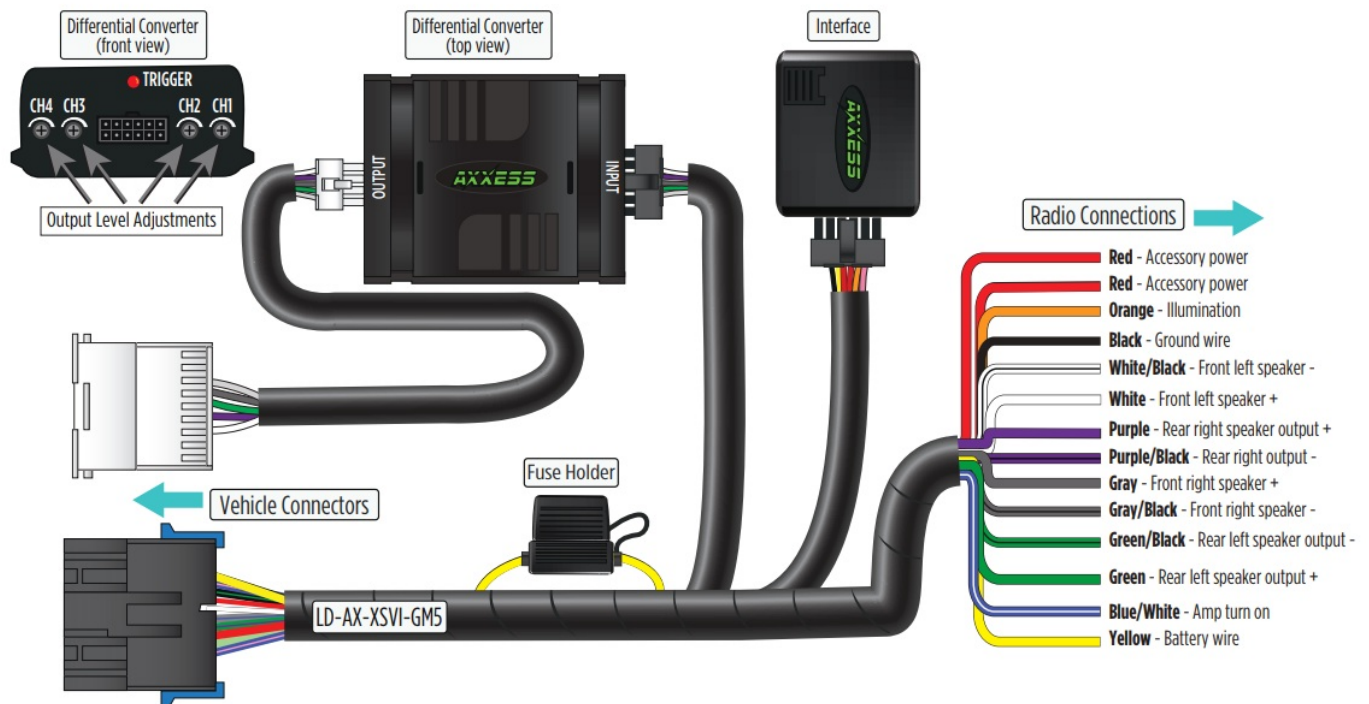

INSTALLATION

With the key in the off position:

- Connect the LD-AX-XSVI-GM5 harness to the interface and then to the wiring harness in the vehicle.

PROGRAMMING

Attention! If the interface loses power for any reason, the following steps will need to be performed again. Also, if installing an AXSWC, connect it after you initialize and test the interface/radio, with the key in the off position.

- Turn the key (or push-to-start button) to the ignition position and wait until the radio comes on.
- **Note:** If the radio does not come on within 60 seconds, turn the key to the off position, disconnect the interface, check all connections, reconnect the interface, and then try again.
- Turn the key to the off position, and then to the accessory position. Test all functions of the installation for proper operation before reassembling the dash.
- **Note:** If using the AXSWC, connect it after you initialize the AXDI-VET1, with the key in the off position.

Having difficulties? We're here to help.

- Contact our Tech Support line at: [386-257-1187](tel:386-257-1187)
- Or via email at: techsupport@metra-autosound.com

Tech Support Hours (Eastern Standard Time)

- Monday – Friday: 9:00 AM – 7:00 PM Saturday: 10:00 AM – 5:00 PM Sunday: 10:00 AM – 4:00 PM

KNOWLEDGE IS POWER

Enhance your installation and fabrication skills by enrolling in the most recognized and respected mobile

electronics school in our industry. Log onto www.installerinstitute.edu or call [386-672-5771](tel:386-672-5771) for more information and take steps toward a better tomorrow.

Metra recommends MECP-certified technicians

- AxxessInterfaces.com
- © COPYRIGHT 2023 METRA ELECTRONICS CORPORATION
- REV. 8/8/23 INSTAXDI-VET1

Specifications

- **Product Name:** Corvette Amplifier Interface
- **Applications:** Chevrolet Corvette 1997-2004
- **Model Number:** AXDI-VET1
- **Manufacturer:** AxxessInterfaces.com

Product Usage Instructions

Installation

1. Before starting the installation process, ensure that the key is out of the ignition.
2. Disconnect the negative battery terminal to prevent any electrical mishaps during installation.
3. Refer to the provided Connections Diagram (LD-AX-XSVI-GM5) for accurate wiring connections.
4. Make all necessary connections, ensuring that all components are properly plugged in.
5. Reconnect the battery after all connections are made and test the product by cycling the ignition.

Programming

For programming instructions, refer to the detailed information available on AxxessInterfaces.com.

Contact Information

If you encounter any difficulties during installation or usage, contact Tech Support:

- Phone: [386-257-1187](tel:386-257-1187)
- Email: techsupport@metra-autosound.com
- Tech Support Hours (Eastern Standard Time):
 - Monday – Friday: 9:00 AM – 7:00 PM
 - Saturday: 10:00 AM – 5:00 PM
 - Sunday: 10:00 AM – 4:00 PM

Additional Information:

For further enhancement of your skills, consider enrolling in the Installer Institute for mobile electronics training. Metra recommends MECP-certified technicians for installation and maintenance.

FAQ

Q: What should I do before installing the Corvette Amplifier Interface?

A: Before installing the product, make sure to disconnect the negative battery terminal and refer to the aftermarket

accessory's instructions for guidance.

Documents / Resources



[AXXESS AXDI-VET1 Corvette Amplifier Interface](#) [pdf] Installation Guide
AXDIVET1, AXVI-VET1, 1997-2004, AXDI-VET1 Corvette Amplifier Interface, AXDI-VET1, Corvette Amplifier Interface, Amplifier Interface, Interface

References

- [A Axxess Integrate - Comprehensive Interface Products for Vehicle Upgrades](#)
- [User Manual](#)

[Manuals+](#), [Privacy Policy](#)

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.