

AXXESS
INTEGRATE
AXPIO-CAM2
Chevrolet
Camaro Dash
Kit



AXXESS AXPIO-CAM2 Chevrolet Camaro Dash Kit Installation Guide

[Home](#) » [AXXESS](#) » AXXESS AXPIO-CAM2 Chevrolet Camaro Dash Kit Installation Guide 

Contents

- 1 AXXESS AXPIO-CAM2 Chevrolet Camaro Dash Kit
- 2 PRODUCT INFORMATION
- 3 KIT FEATURES
- 4 KIT COMPONENTS
- 5 TOOLS REQUIRED
- 6 DASH DISASSEMBLY
- 7 CONNECTIONS
- 8 KIT ASSEMBLY
- 9 RADIO OPERATIONS
- 10 MORE INFORMATION
- 11 FAQs
- 12 Documents / Resources
 - 12.1 References



AXXESS AXPIO-CAM2 Chevrolet Camaro Dash Kit



PRODUCT INFORMATION

Chevrolet Camaro 2019-UP


Visit AxxessInterfaces.com for more detailed information about the product and up-to-date vehicle-specific applications.

KIT FEATURES

- Designed for Pioneer DMH-WC5700NEX receivers
- Allows for the retention and adjustment of the factory personalization menu through the Pioneer radio
- Provides a visual view of HVAC and gauges on the Pioneer screen (can not be adjusted via the screen)
- Complete Plug-n-Play installation
- Includes dash kit with Axxess interface and vehicle-specific T-harness
- Includes a 3' USB/AUX/HDMI replacement cable with panel
- Includes radio antenna adaptor for GPS
- Provides accessory power (12-volt 10-amp)
- Provides NAV outputs (parking brake, reverse, speed sense)
- Retains audio controls on the steering wheel
- Works in both single and dual-zone vehicles
- Retains safety chimes through an included off-board speaker
- USB Micro B updatable
- Dash kit is painted scratch-resistant matte black to match the factory finish
- Designed for non-amplified vehicles only

KIT COMPONENTS

- A) Display Screen Housing
- B) Display Screen Trim Bezel
- C) Display Screen Trim
- D) Brackets
- E) Panel Clips
- F) Phillips Screws (4)

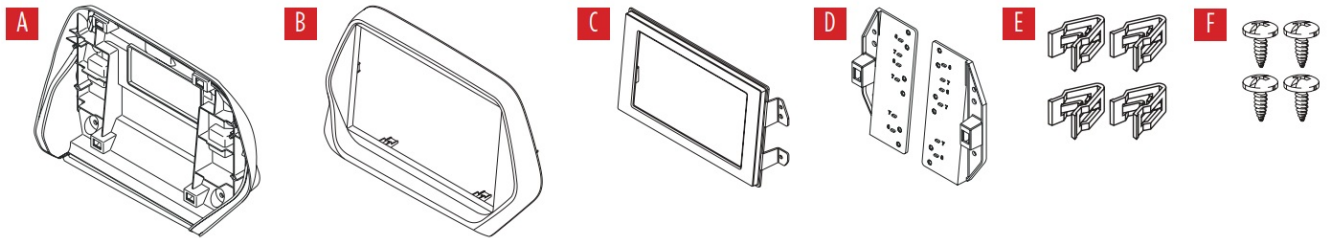

Not Shown: Radio Interface, LD-GM30-PIO, LD-GM31-PIO, AXEXH-GM30, AXEXH-GM31 LD-GMSWC, AD-EU5, 40-GPS-PIO, PR04AVIC-PIO / PRO4-PIORCA, LD-AX-SPK, AXUSB-GM6

WIRING & ANTENNA CONNECTIONS

- RGB Extension Cable: Pioneer part # CD-RGB150A (not sold by Metra)

TOOLS REQUIRED

- Panel removal tool
- Phillips screwdriver
- 9/32" socket wrench


ATTENTION: With the key out of the ignition, disconnect the negative battery terminal before installing this product. Ensure that all installation connections, especially the air bag indicator lights, are plugged in before reconnecting the battery or cycling the ignition to test this product.

NOTE: Refer also to the instructions included with the aftermarket accessory before installing this device.


DASH DISASSEMBLY

Models equipped with a 7-inch touchscreen radio:

1. Using the panel removal tool, gently unclip, unplug, and remove the radio control trim panel. (Figure A)
2. Remove (4) 9/32" screws securing the radio, disconnect the wiring, and then remove the radio. (Figure B)

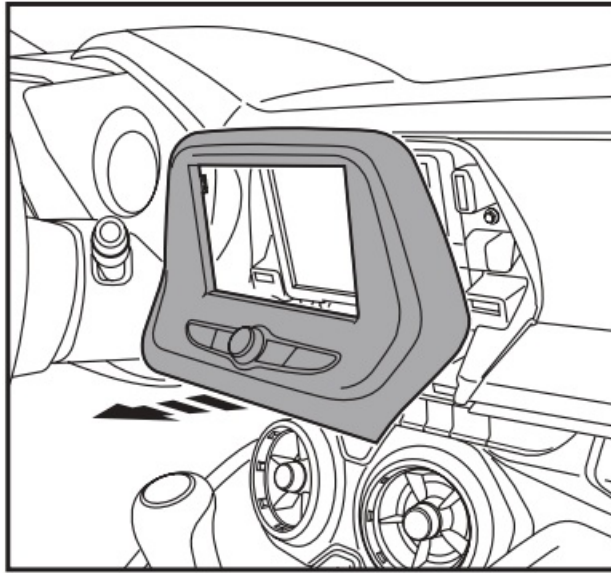


(Figure A)

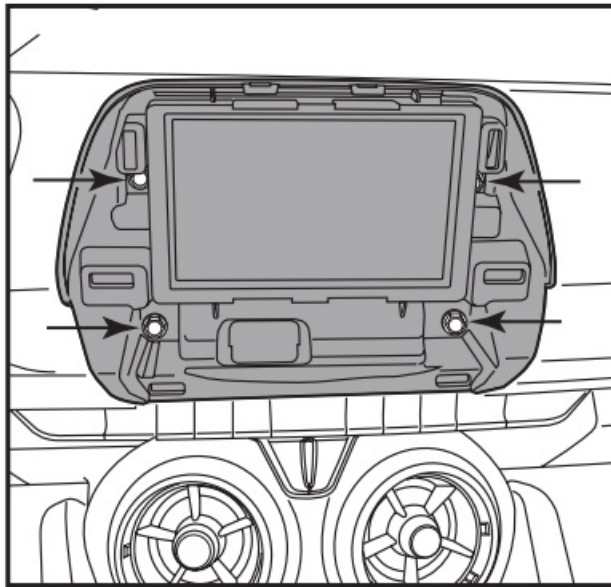


(Figure B)

Models equipped with an 8-inch touchscreen radio:

1. Using the panel removal tool, carefully unclip and remove the trim surrounding the radio controls. (Figure C)
2. Remove (2) 9/32" screws securing the radio, disconnect the wiring, and then remove the radio. (Figure D)

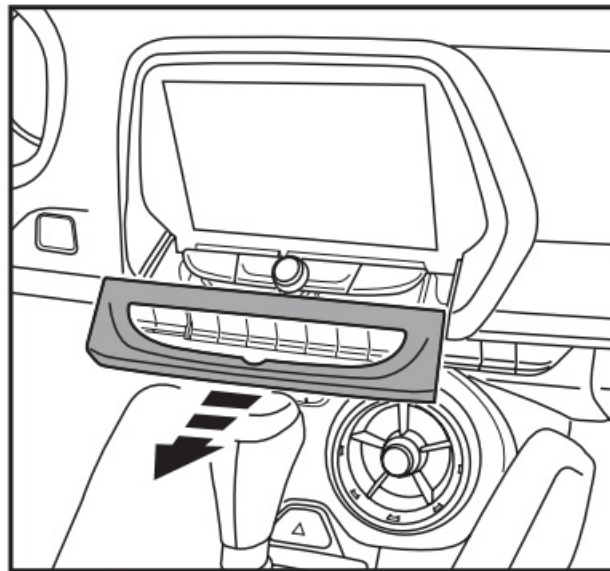


(Figure C)

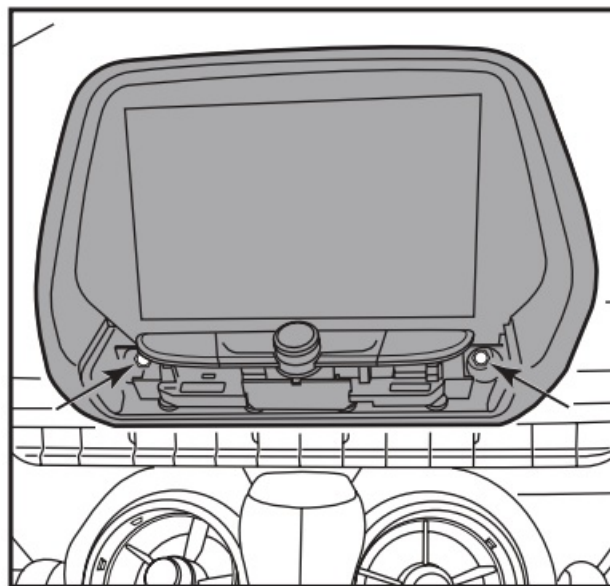


(Figure D)

CONNECTIONS

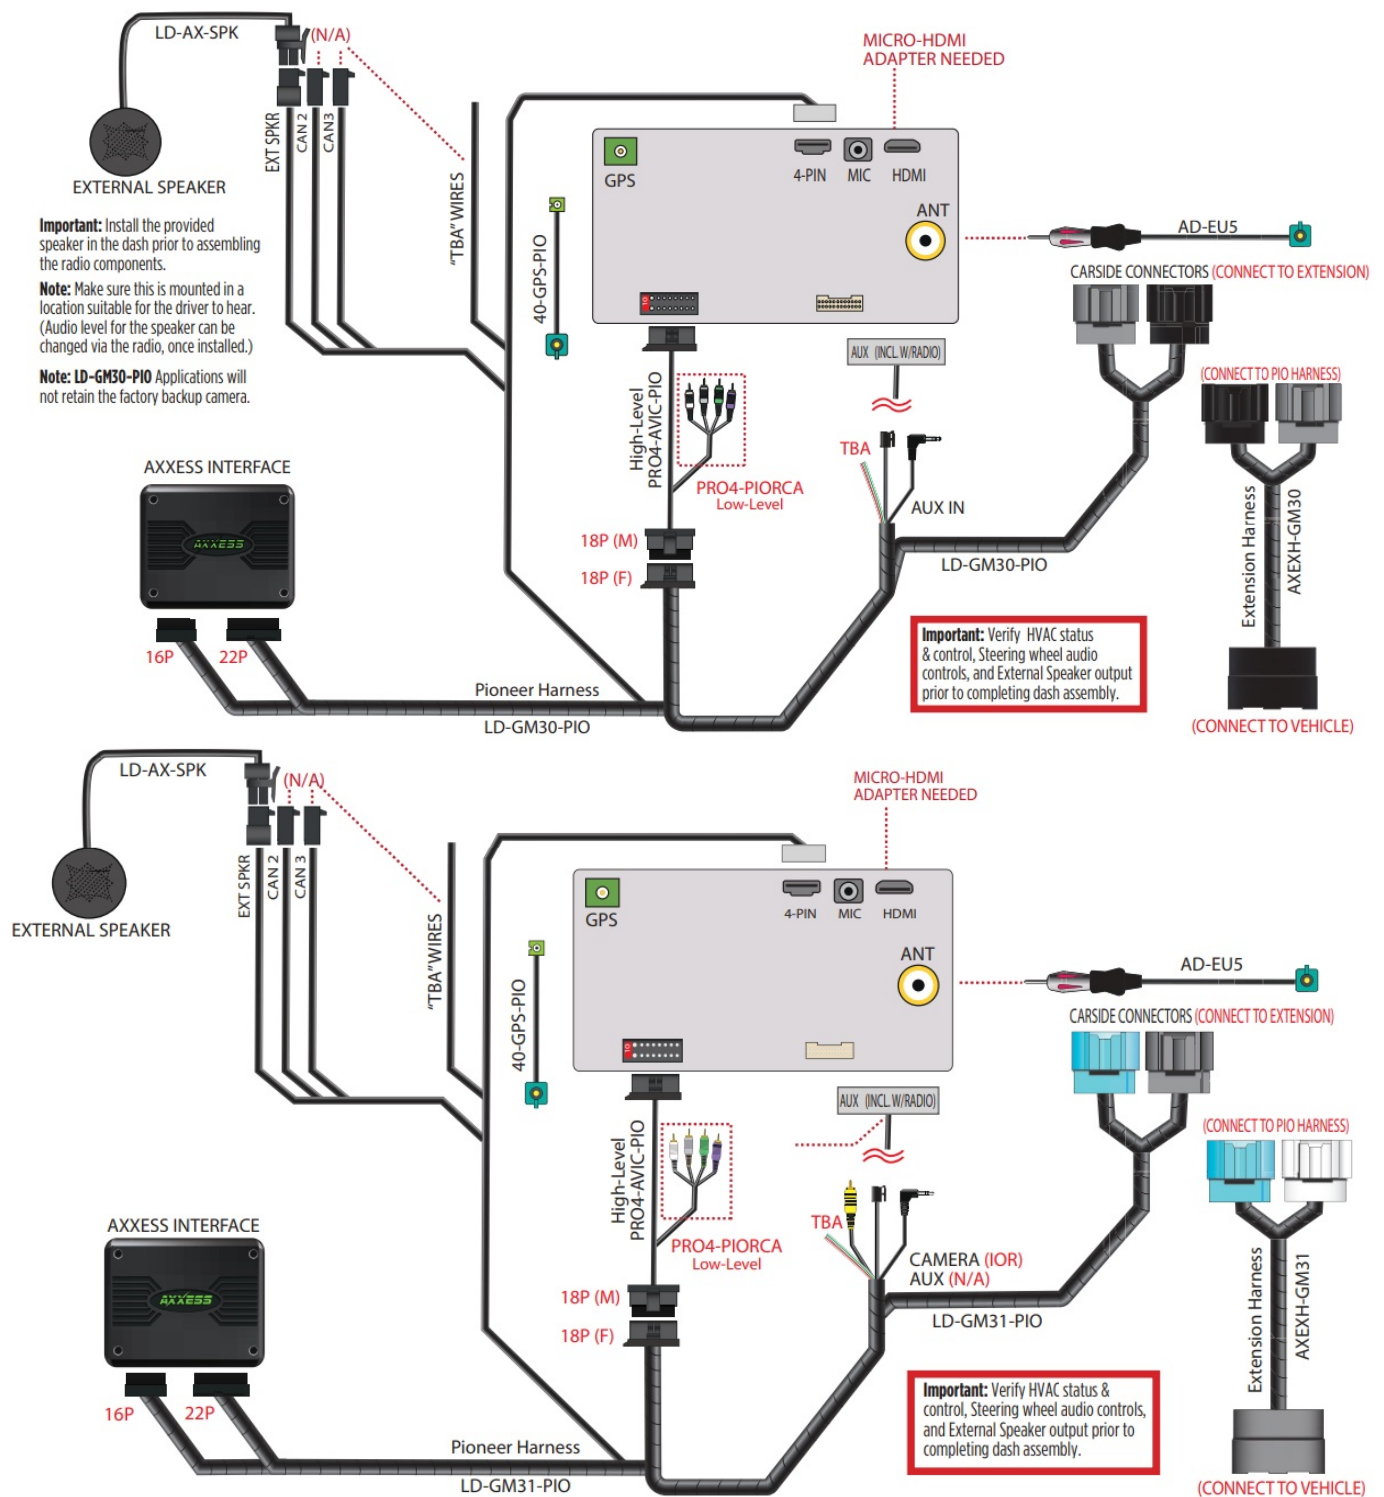


KIT ASSEMBLY

1. Secure the display screen housing to the dash using the (4) 9/32" factory screws removed in dash disassembly. (Figure A) **Note:** For vehicles equipped with an 8- inch touchscreen radio, remove (2) 9/32" screws from the dash beforehand.
2. Remove the locator pins stamped "8" from the display screen brackets. Using the holes stamped "7", secure the display screen to the brackets using (6) screws supplied with the radio. (Figure B) **Note:** Reference the installation manual provided with the radio for which hardware to use. The display screen and radio chassis use two different types of screws.
3. Find a suitable location for the radio chassis. Route the RGB extension cable from the radio chassis to the display screen, then connect it to the display screen.

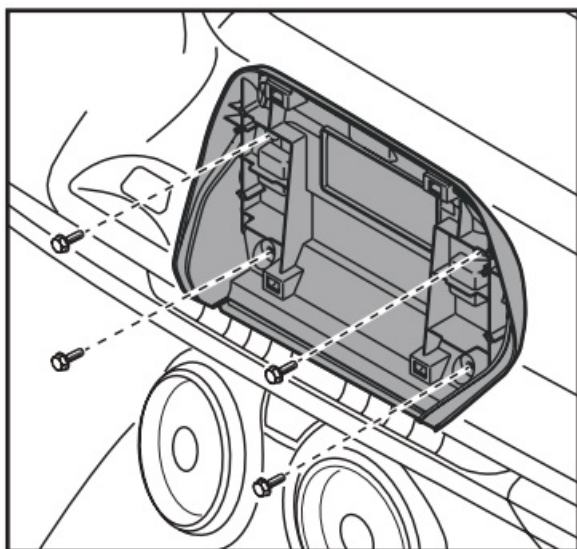


(Figure A)

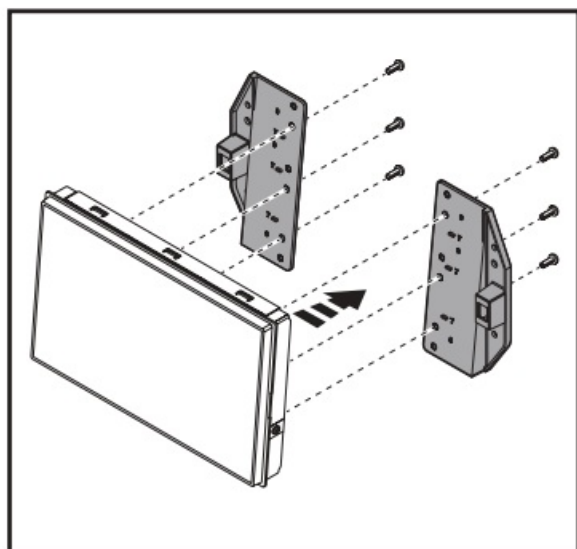


(Figure B)

4. Place the display screen trim over the bracket/display assembly, then secure the assembly to the display screen housing using (4) Phillips screws provided. (Figure C)
5. Locate the factory wiring harness and antenna connector in the dash and complete all necessary connections to the radio assembly. Metra recommends using the proper mating adapter from Metra and/ or Axxess.
6. Reconnect the negative battery terminal and test the Pioneer radio for proper operation.
7. Attach (6) panel clips provided onto the display screen trim bezel, then clip the bezel over the radio to complete the installation. (Figure D)

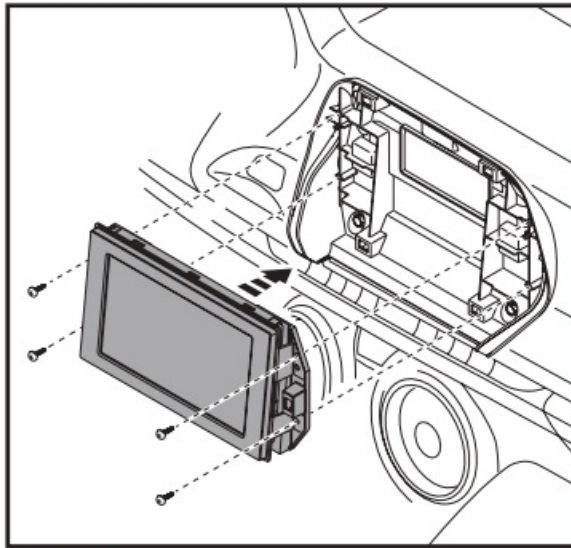

(Figure C)

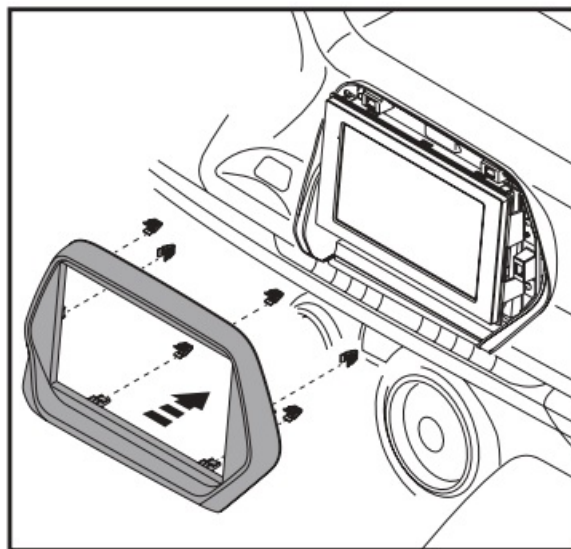

(Figure D)

RADIO OPERATIONS

Vehicle Selection

- Allows the selection of the vehicle the Pioneer radio is being installed in.
- Select Make, Model and Trim to activate the extended functions of the radio.
- Press Confirm to lock in the selection.
- The vehicle type must be selected to activate HVAC functions and steering wheel controls.

← Vehicle Selection	
Make	No Selection
Model	
Trim	
Save to Flash and Restart	Confirm

← Confirm Vehicle Selection	
Make	Chevy
Model	Camaro 19+
Trim	All
Save to flash?	Confirm


Car Features

- The source for accessing all vehicle information and options.



Customizations Menu: Allows full control of vehicle personalization options.

- Access this menu by selecting the gear icon on the previous screenshot:
- Provides SWC Configuration.
- Dual Assignment: Assign (2) functions to a single SWC button.
- Remap: Reassign a button on the steering wheel controls.

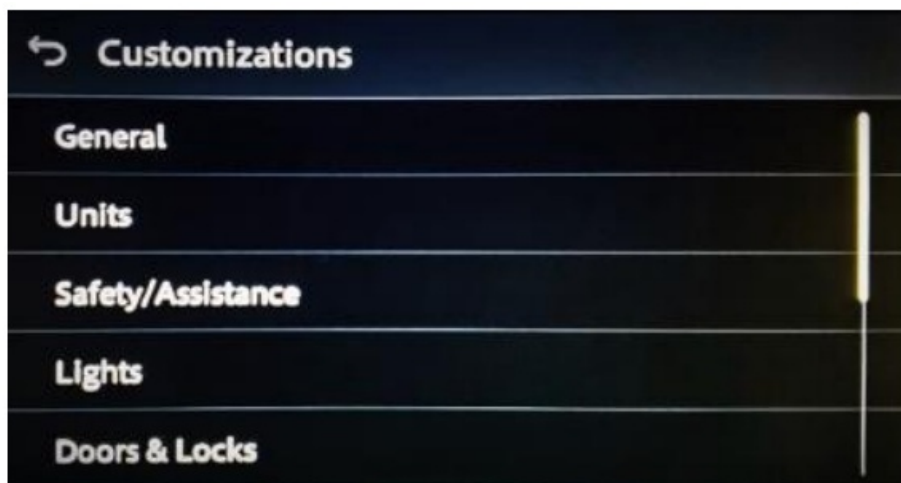


- **HVAC Operation:** HVAC Status and Control Screen



- **Vehicle Information Screen:** The source for accessing all vehicle information and options.



- **About Screen:** Feedback screen for interface software information.
 - Helpful information for troubleshooting.

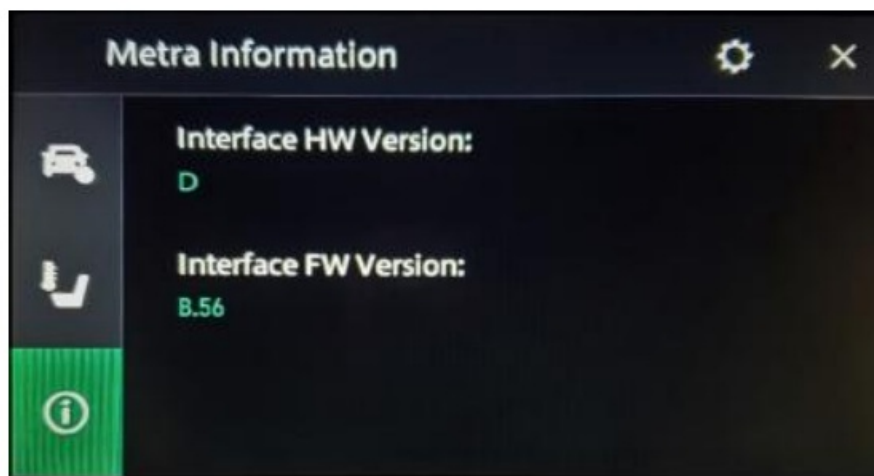

MORE INFORMATION



- **Having difficulties?** We're here to help.
- Contact our Tech Support line at: [386-257-1187](tel:386-257-1187)
- Or via email at:
- techsupport@metra-autosound.com
- AxxessInterfaces.com

Tech Support Hours (Eastern Standard Time)

- Monday – Friday: 9:00 AM – 7:00 PM Saturday: 10:00 AM – 5:00 PM Sunday: 10:00 AM – 4:00 PM

FAQs

- **Q: Can I change the audio level for the external speaker?**

- A: Yes, once installed, you can adjust the audio level for the external speaker via the radio settings.

Documents / Resources



[AXCESS AXPIO-CAM2 Chevrolet Camaro Dash Kit](#) [pdf] Installation Guide
AXPIO-CAM2, AXPIO-CAM2 Chevrolet Camaro Dash Kit, Chevrolet Camaro Dash Kit, Camaro Dash Kit, Dash Kit

References

- [User Manual](#)

[Manuals+](#), [Privacy Policy](#)

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.