



# AXXESS AXPIO-COL2 Pioneer Radio Integration Package Installation Guide

[Home](#) » [AXXESS](#) » **AXXESS AXPIO-COL2 Pioneer Radio Integration Package Installation Guide** 

## Contents

- 1 AXCESS AXPIO-COL2 Pioneer Radio Integration Package
- 2 PRODUCT INFORMATION
- 3 WIRING & ANTENNA CONNECTIONS
- 4 KIT FEATURES
- 5 DASH DISASSEMBLY
- 6 CONNECTIONS
- 7 KIT PREPARATION
- 8 KIT ASSEMBLY
- 9 RADIO OPERATIONS
- 10 MORE INFORMATION
- 11 FAQs
- 12 Documents / Resources
  - 12.1 References



## AXXESS AXPIO-COL2 Pioneer Radio Integration Package



## PRODUCT INFORMATION

### Chevrolet Colorado/GMC Canyon 2019-Up

Visit [AxxessInterfaces.com](https://www.AxxessInterfaces.com) for more detailed information about the product and up-to-date vehicle-specific applications.



## KIT FEATURES

- Designed for Pioneer DMH-W4600NEX/W4660NEX or DMH-WC5700NEX receivers
- Allows for the retention and adjustment of the factory personalization menu through the Pioneer radio
- Provides a visual view of HVAC and gauges on the Pioneer screen (cannot be adjusted via the screen).

## KIT COMPONENTS

- A) Radio Trim Panel
- B) Brackets
- C) #8 x 3/8" Phillips pan-head Screws (4)


**Not Shown:** Radio Interface, LD-GM30-PIO, LD-GM31-PIO, AD-EU5, 40-GPS-PIO, PR04AVIC-PIO/PRO4-PIORCA, LD-AX-SPK

## WIRING & ANTENNA CONNECTIONS

- RGB Extension Cable: Pioneer part # CD-RGB150A (not sold by Metra)

## TOOLS REQUIRED

- A: Panel removal tool
- B: Phillips head screwdriver
- C: 9/32" socket wrench

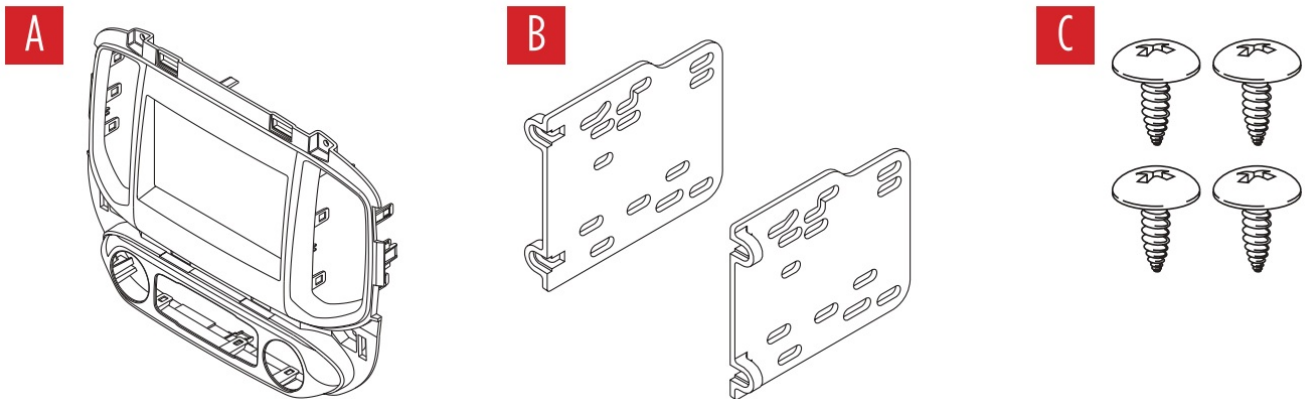

**ATTENTION:** With the key out of the ignition, disconnect the negative battery terminal before installing this product. Ensure that all installation connections, especially the air bag indicator lights, are plugged in before reconnecting the battery or cycling the ignition to test this product.

**NOTE:** Refer also to the instructions included with the aftermarket radio.

## KIT FEATURES

### KIT FEATURES (CONT.)

- Complete Plug-n-Play installation
- Includes dash kit with Axxess interface and vehicle-specific T-harness
- Includes radio antenna adaptor for GPS
- Provides accessory power (12-volt 10-amp)
- Provides NAV outputs (parking brake, reverse, speed sense)

- Retains audio controls on the steering wheel
- Works in both single and dual-zone vehicles
- Retains safety chimes through an included off-board speaker
- USB Micro "B" USB updatable
- Dash kit is painted scratch-resistant matte black to match the factory finish
- For non-amplified vehicles only


## **SPEAKER INSTALLATION**

Install the provided speaker in the dash prior to assembling the radio components.


**Note:** Make sure this is mounted in a location suitable for the driver to hear. (Audio level for the speaker can be changed via the radio, once installed.)

## **DASH DISASSEMBLY**

1. Unclip and remove the trim panel surrounding the radio/climate control panel. (Figure A)
2. Remove (4) 9/32" screws securing the radio/climate control panel. (Figure B)
3. Remove (2) 9/32" screws securing the CD player then unplug and remove the player.
4. Unclip and slide out the factory tuner module then unplug and remove it.
5. Unclip and remove the climate controls from the factory trim panel.
6. Unclip and remove the climate control vents from the factory trim panel.

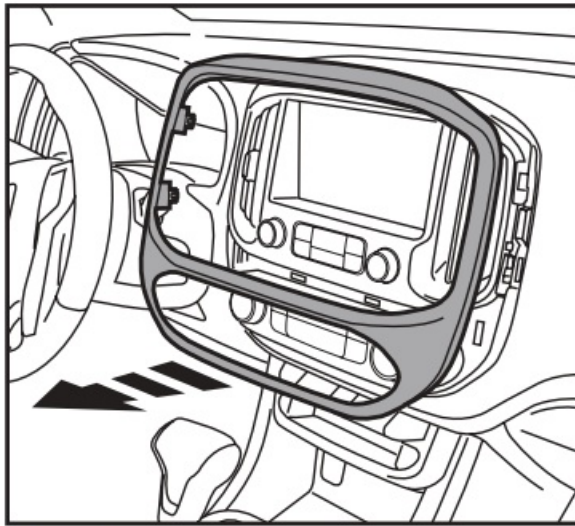



(Figure A)

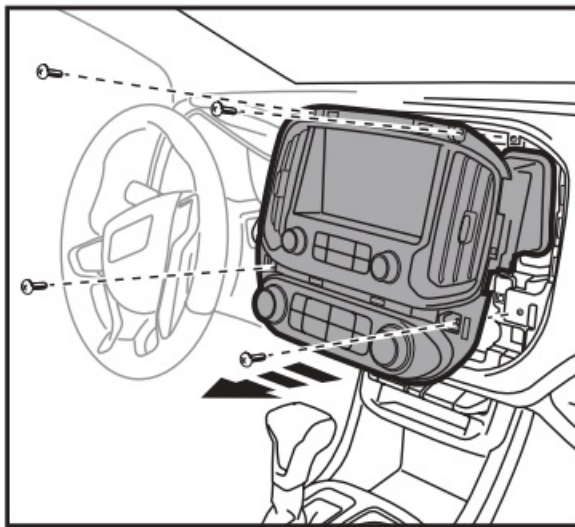

(Figure B)

## CONNECTIONS

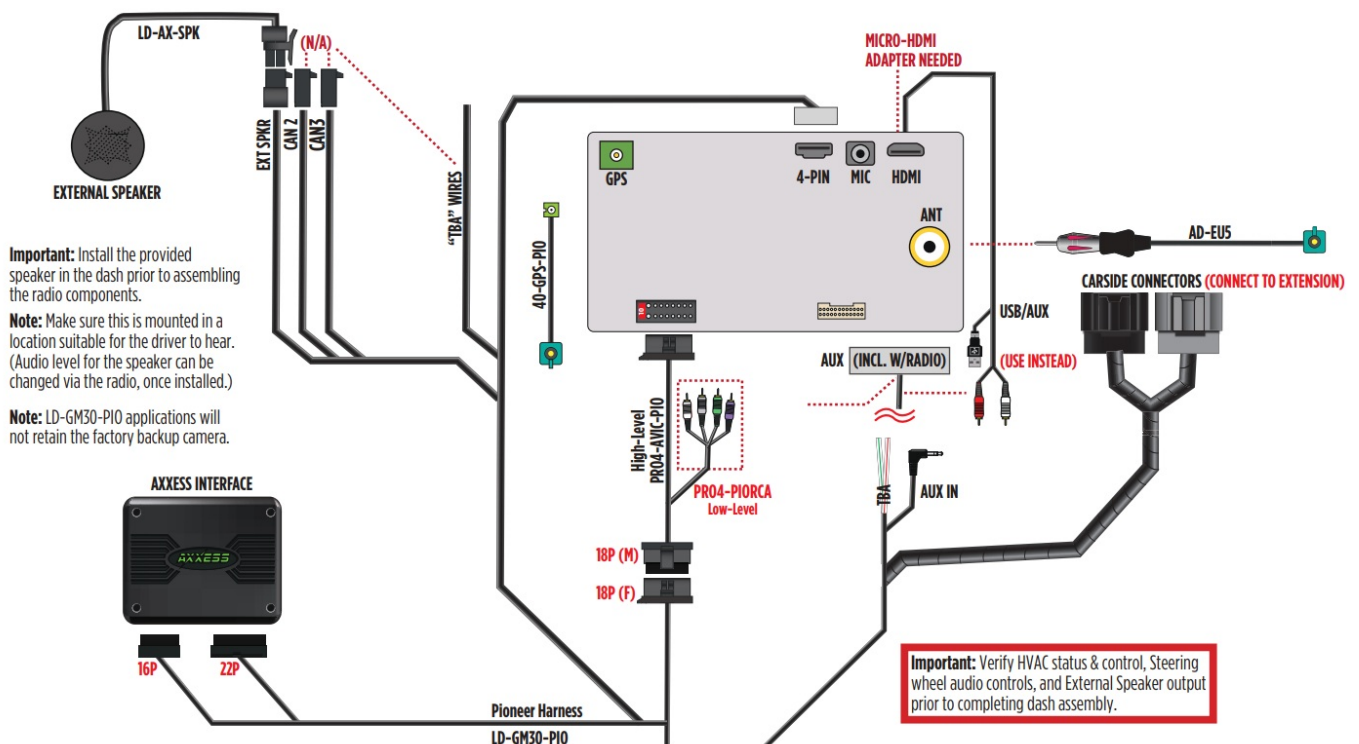


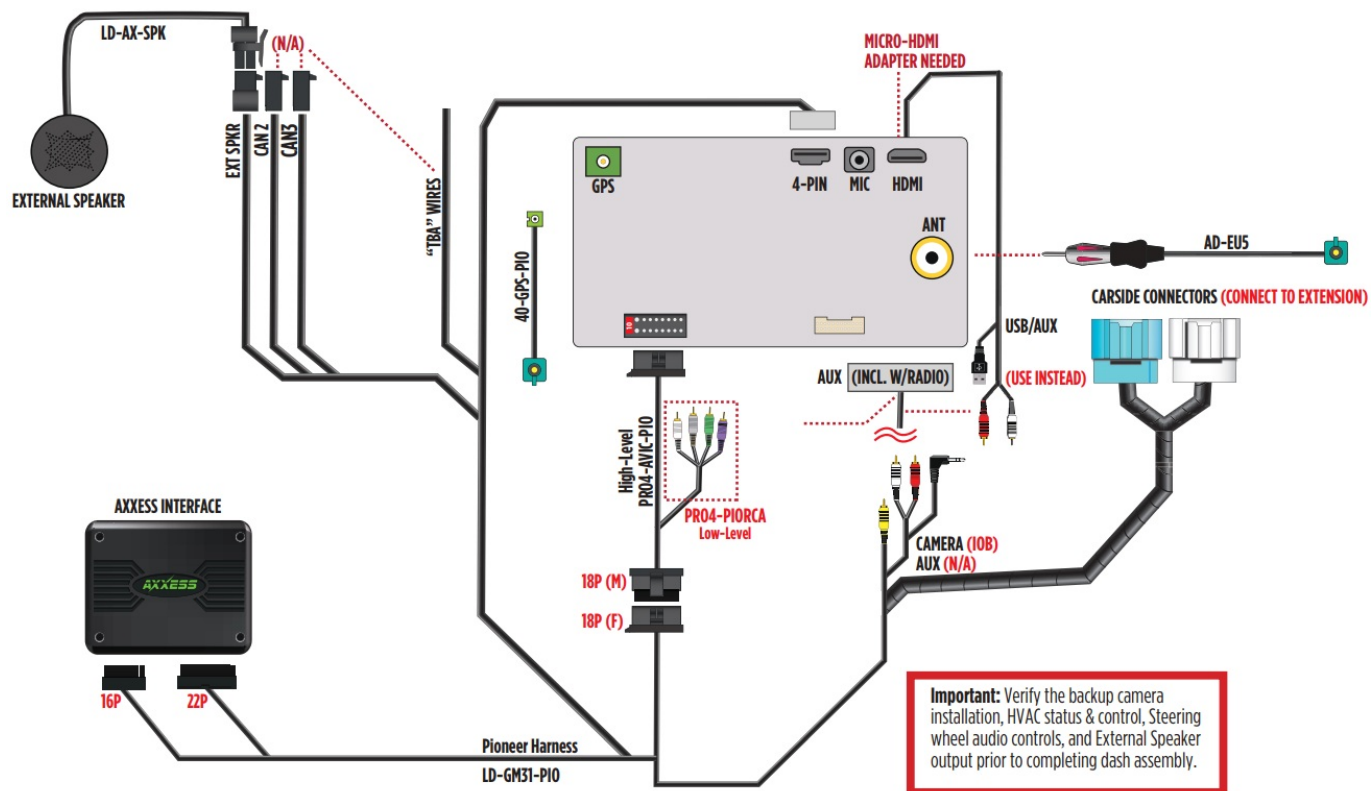

## KIT PREPARATION

1. Cut and remove the specified (shaded) areas in the sub dash. (Figure A)

### 1. Continue to Kit Assembly

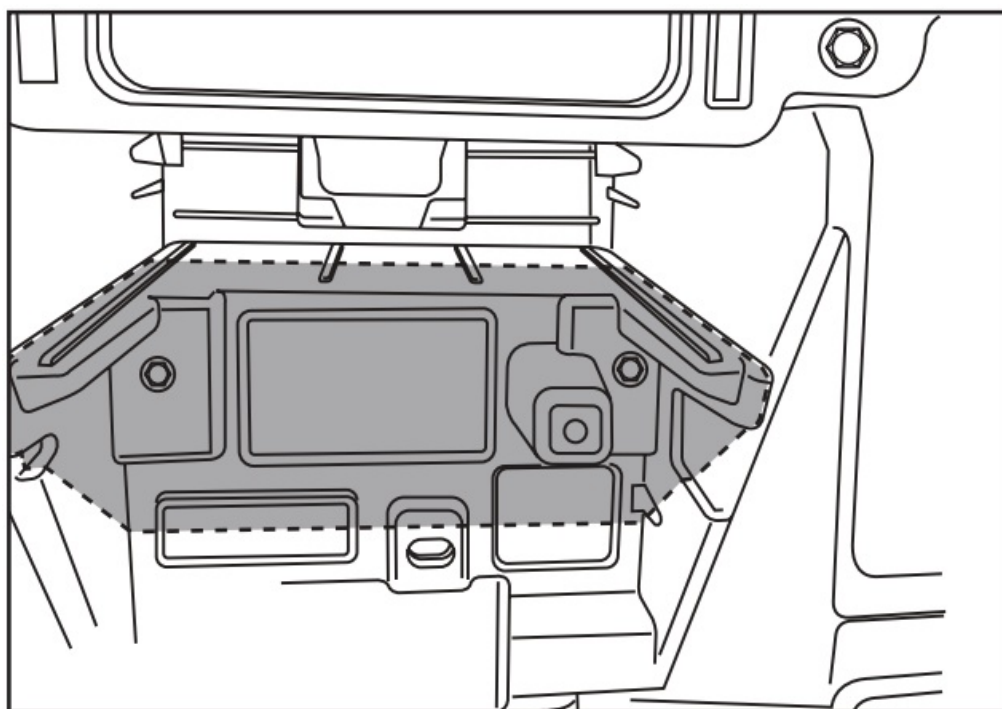

(Figure A)

## KIT ASSEMBLY


### Double DIN radio provision

1. Attach the radio brackets to the radio trim panel with (4) #8 x 3/8" Phillips screws provided with this kit. (Figure




A)

2. Slide the radio into the bracket trim panel assembly and secure with the screws supplied with the radio. (Figure B)
3. Clip the climate controls into the radio trim panel assembly.
4. Snap the climate control vents into the radio trim panel assembly.
5. Locate the factory wiring harness and antenna plug in the dash. Metra recommends using the proper mating adapters from Metra and/or AXXESS.
6. Complete all connections to the radio and vehicle, reconnect the negative battery terminal, and then test the aftermarket radio and vehicle for proper operation.
7. Mount the radio assembly into the dash using the factory screws.
8. Reassemble the dash in the reverse order of disassembly to complete the installation.

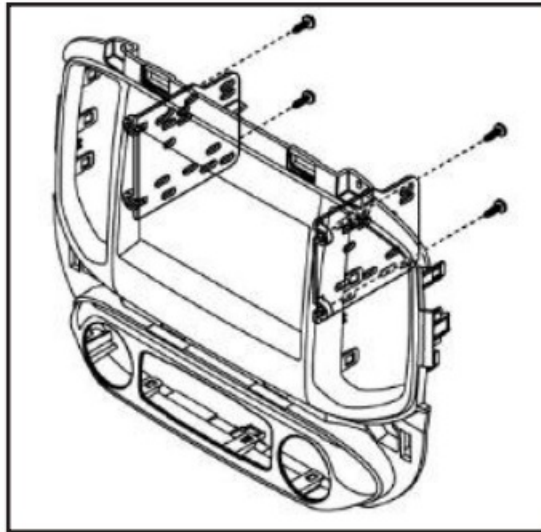

(Figure A)

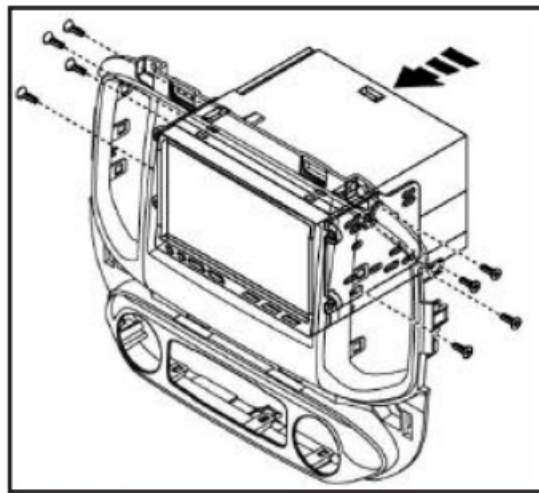


(Figure B)

## RADIO OPERATIONS

### Vehicle Selection

- Allows the selection of the vehicle the Pioneer radio is being installed in.
- Select Make, Model and Trim to activate the extended functions of the radio.
- The vehicle type must be selected to activate iPod, Bluetooth, backup cameras, as well as, HVAC functions and steering wheel controls.

- Press Confirm to lock in the selection.

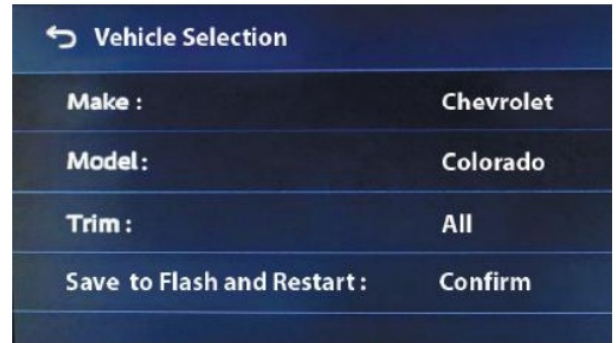


## Car Features

- The source for accessing all vehicle information and options.



## Customizations Menu:

- Allows full control of vehicle personalization options. Access this menu by selecting Settings (gear icon) on the previous screenshot:
- Provides Steering Wheel Control (SWC) Configuration.
- Dual Assignment: Assign (2) functions to a single SWC button.
- Remap: Reassign a button on the SWC.

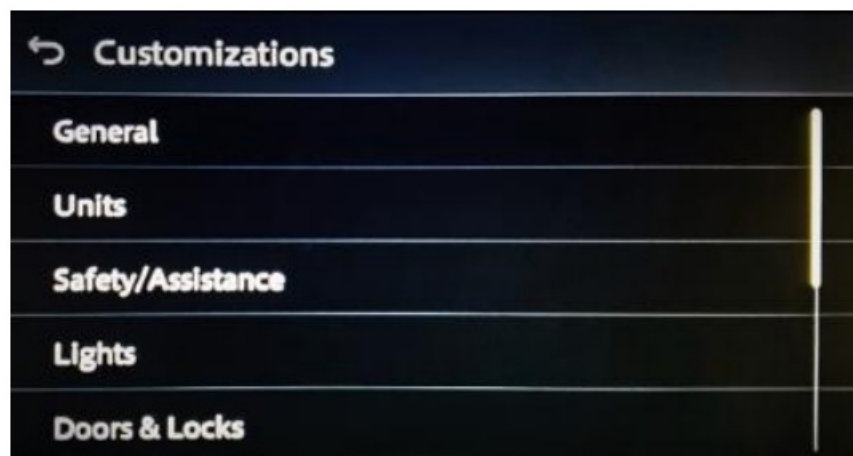

- **Climate Screen:** HVAC Status only






- **Vehicle Information Screen** : The source for accessing all vehicle information and options.



- **Radio ID Screen**: Feedback screen for interface software information. Helpful information for troubleshooting.

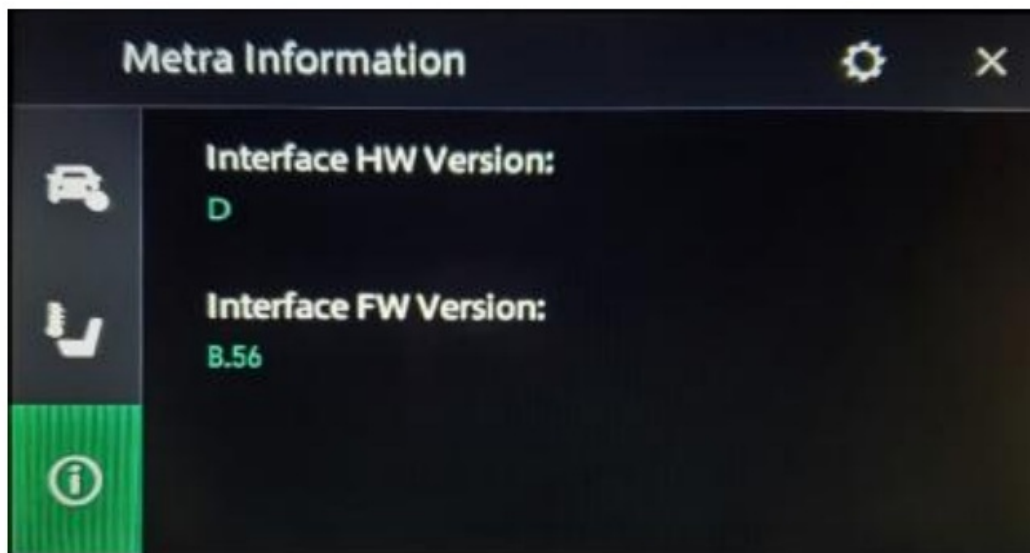

**MORE INFORMATION**



**Having difficulties?** We're here to help.

- Contact our Tech Support line at:
- [386-257-1187](tel:386-257-1187)
- Or via email at:
- [techsupport@metra-autosound.com](mailto:techsupport@metra-autosound.com)
- [AxxessInterfaces.com](http://AxxessInterfaces.com)

#### **Tech Support Hours (Eastern Standard Time)**

- Monday – Friday: 9:00 AM – 7:00 PM Saturday: 10:00 AM – 5:00 PM Sunday: 10:00 AM – 4:00 PM

#### **FAQs**

- **Q: Do I need to disconnect the negative battery terminal before installation?**
  - A: Yes, with the key out of the ignition, disconnect the negative battery terminal before installing the product.
- **Q: How can I adjust the audio level for the speaker?**
  - A: Once installed, the audio level for the speaker can be changed via the radio.

#### **Documents / Resources**



[AXXESS AXPI0-COL2 Pioneer Radio Integration Package](#) [pdf] Installation Guide  
AXPI0-COL2 Pioneer Radio Integration Package, AXPI0-COL2, Pioneer Radio Integration Package, Radio Integration Package, Integration Package, Package

#### **References**

- [User Manual](#)

#### **Manuals+ Privacy Policy**

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.