Saved from manuals.plus.
Open the live page for links to other documents and user manuals.

DEWENWILS SP-058A/TR-034-8

DEWENWILS Outdoor Power Stake Timer (Model SP-058A/TR-034-8) Instruction Manual

Brand: DEWENWILS | Model: SP-058A/TR-034-8

Introduction

The DEWENWILS Outdoor Power Stake Timer is designed to provide convenient and automated power control for your outdoor electrical devices. This unit features 6 grounded outlets, a 6-foot extension cord, and a wireless remote control with a 100-foot range. It offers multiple timer choices, including a photocell dusk-to-dawn sensor, to simplify the management of your outdoor lighting and appliances.

Key Features:

- **Multi-Timer Choices:** Select from Dusk to Dawn, on at dusk and off after 2/4/6/8 hours, on immediately and off after 2/4/6/8 hours, or always ON/OFF. Schedules repeat daily once set.
- **Wireless Remote Control:** Conveniently turn devices on/off from up to 100 feet away with the included RF remote, even through walls and doors.
- **Waterproof & Safe Design:** Features individual waterproof covers for outlets, an overload protection switch, SJTW cord, and fireproof PPE material for superior outdoor safety and durability in various weather conditions.
- **6 Grounded Outlets & 6FT Cord:** Three outlets on each side allow for simultaneous operation of up to 6 devices. The 6-foot extension cord provides flexible placement options.

Safety Information

Please read and understand all safety instructions before using this product. Failure to follow these instructions may result in electric shock, fire, or serious injury.

- This product is intended for outdoor use. Ensure all connections are secure and waterproof covers are properly closed.
- Always plug the power stake into a Ground Fault Circuit Interrupter (GFCI) protected outlet.
- Do not immerse the unit in water.
- Do not exceed the maximum electrical rating of 13A/1625W.
- Keep children and pets away from the unit while in operation.
- Ensure the stake is firmly inserted into the ground to prevent tipping.

- Disconnect power before performing any maintenance or cleaning.
- The product is UL Listed, indicating compliance with safety standards.

Package Contents

- DEWENWILS Outdoor Power Stake Timer Unit
- Wireless Remote Control (CR2032 battery included)
- 2-Section Ground Stake
- Instruction Manual



Figure 1: Overview of the power stake timer and its components, including the remote control, 6 outlets, overload protection switch, and 6-foot cord with stake.

Setup

1. Assemble the Ground Stake

1. Connect the two sections of the ground stake by screwing them together.

2. Attach the assembled stake to the bottom of the power stake timer unit by screwing it into place.



Figure 2: Illustration of how to assemble the ground stake by screwing the sections together and attaching it to the main unit.

2. Placement

- Select a suitable outdoor location for the power stake. Ensure it is placed at least 1 foot above the ground to protect outlets from water.
- Firmly insert the ground stake into the soil.
- Position the unit near a GFCI-protected outdoor electrical outlet.



Figure 3: The power stake timer installed in the ground, showcasing its waterproof design and elevated outlets.

3. Connect Devices

- Open the individual waterproof covers on the outlets.
- Plug your outdoor lights or appliances into the 6 grounded outlets.
- Close the waterproof covers securely over any unused outlets and around the plugged-in cords to prevent water and dust ingress.



Figure 4: Detail of the power stake's outlets with protective covers, highlighting their design for weather resistance.

4. Power On

- Plug the power stake's 6-foot extension cord into your outdoor GFCI outlet.
- Ensure the main power switch on the unit is in the "ON" position.



Figure 5: The 6-foot extension cord providing ample reach to an outdoor GFCI outlet, ensuring safe power connection.

Operating Instructions

Timer Modes

The power stake offers various timer settings, controllable via the unit's button or the wireless remote.

- **Dusk to Dawn:** The unit will automatically turn on when it gets dark and turn off when it gets light.
- **Dusk + X Hours:** The unit will turn on at dusk and turn off after a set duration (2, 4, 6, or 8 hours).
- **Always ON/OFF:** Manually control the power to your devices.
- **Immediate ON + X Hours:** The unit will turn on immediately and turn off after a set duration (2, 4, 6, or 8 hours).



Figure 6: Visual representation of the various timer options, including Always ON/OFF, timed durations, and Dusk to Dawn sensor.



Figure 7: The integrated photocell sensor, which detects ambient light levels to activate or deactivate connected devices for dusk-to-dawn operation.

Using the Wireless Remote Control

The included wireless remote allows you to control the power stake from a distance of up to 100 feet, even through walls and doors.

- **ON/OFF Buttons:** Press 'ON' to turn on all connected devices, and 'OFF' to turn them off.
- **Timer Buttons (2Hr, 4Hr, 6Hr, 8Hr):** Press these buttons to activate the timer function for the specified duration. The timer will start from the moment the button is pressed.
- **Timer Button (Sun/Moon Icon):** Activates the dusk-to-dawn sensor mode.

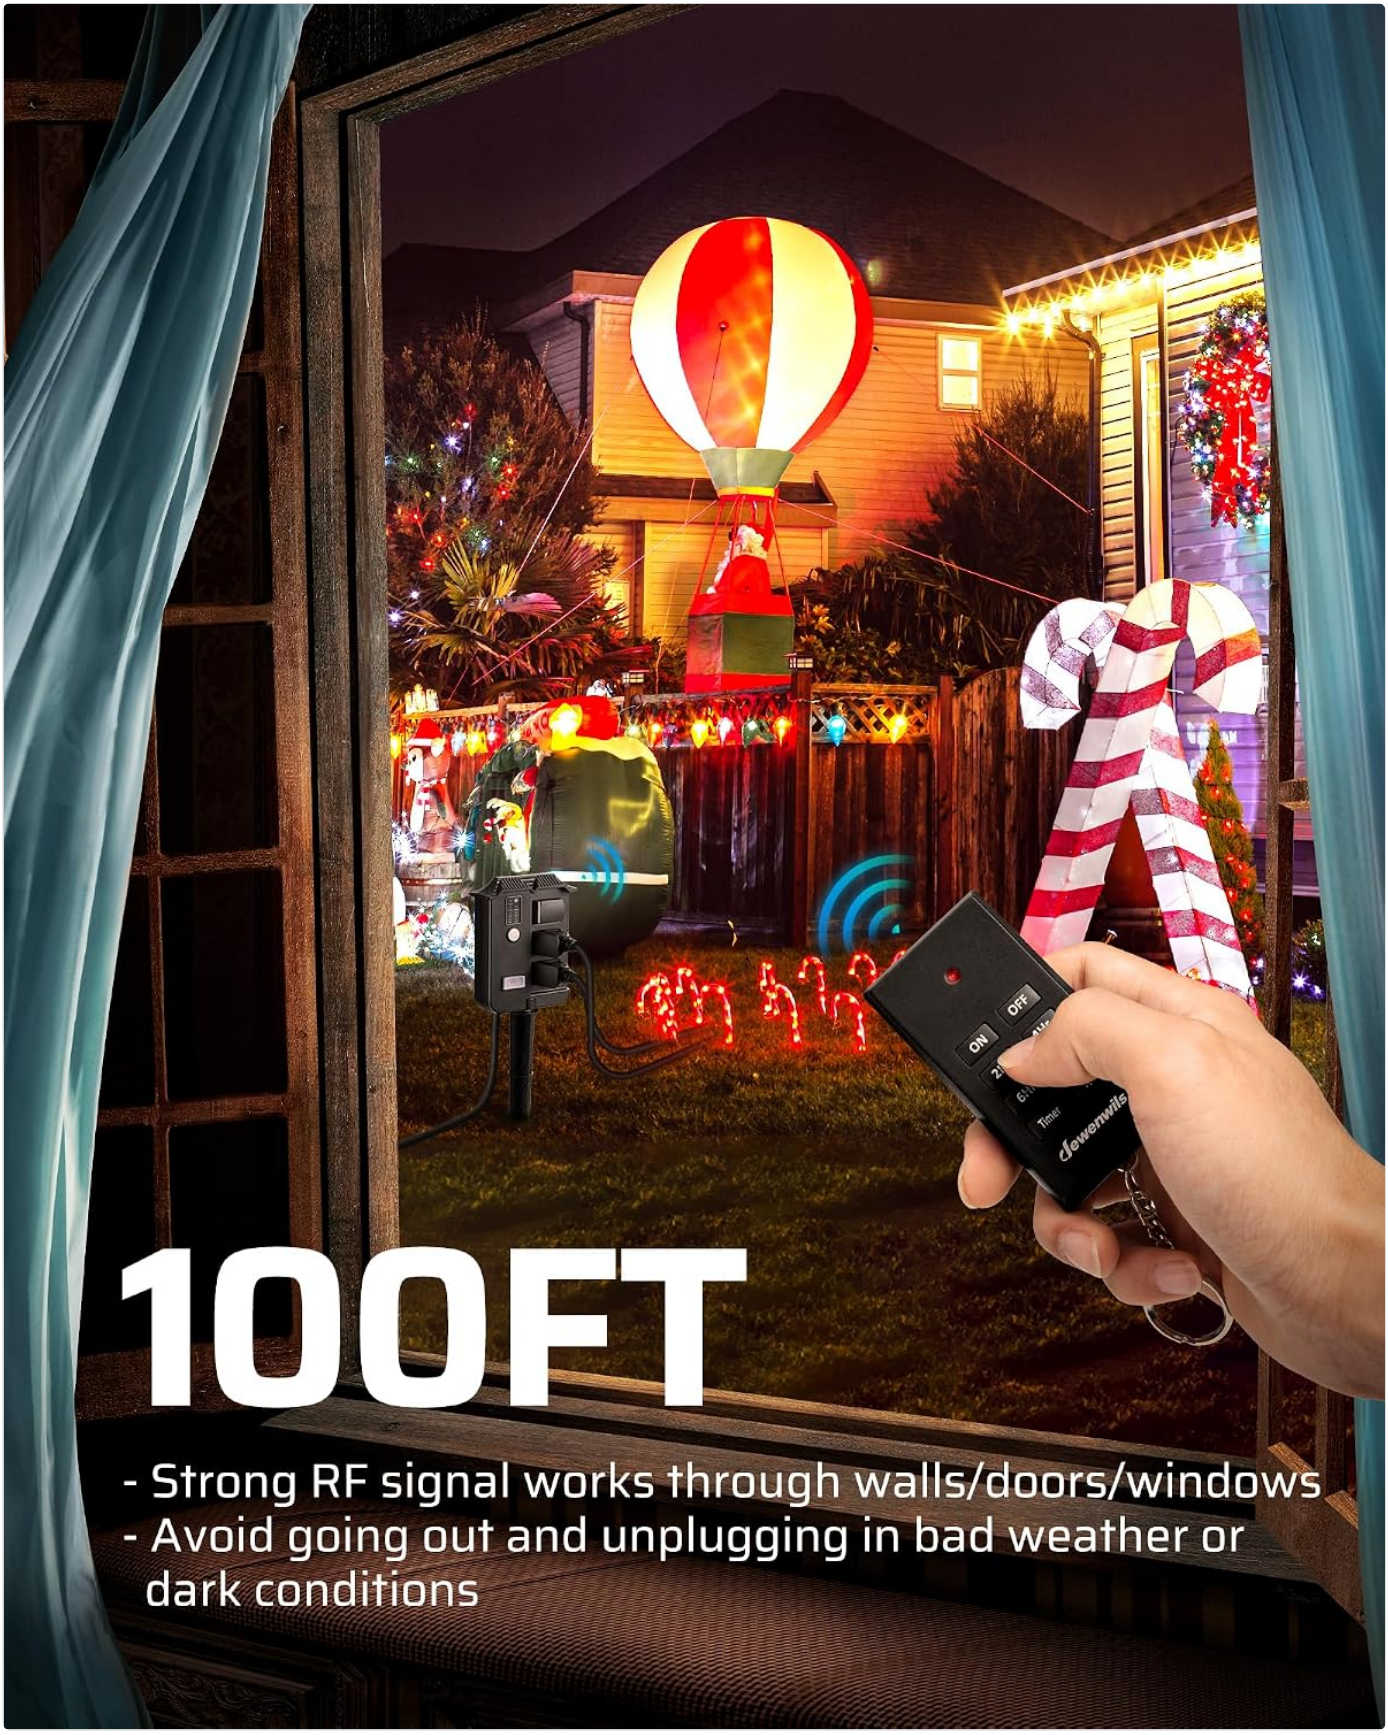


Figure 8: The wireless remote control in use, demonstrating its 100-foot range and ability to control devices without direct line of sight.

Maintenance

- **Cleaning:** Periodically wipe the unit with a damp cloth. Do not use harsh chemicals or abrasive cleaners.
- **Waterproof Covers:** Regularly inspect the waterproof covers on the outlets to ensure they are intact and properly sealed. Replace if damaged.

- **Overload Protection:** The unit is equipped with an overload protection switch. If the total wattage of connected devices exceeds 1625W (13A), the switch will trip to prevent damage. Disconnect some devices and press the reset button to restore power.



Figure 9: The overload protection switch, designed to automatically cut power if the connected load exceeds the unit's capacity, preventing electrical hazards.

Troubleshooting

- **No Power:**
  - Check if the power stake is securely plugged into a working GFCI outlet.
  - Ensure the main power switch on the unit is in the 'ON' position.
  - Check if the overload protection switch has tripped. Press the reset button if necessary.
  - Verify that the remote control battery (CR2032) is functional and correctly inserted.
- **Timer Not Working as Expected:**
  - Confirm the correct timer mode is selected (e.g., Dusk to Dawn, 2/4/6/8 hours).
  - For Dusk to Dawn mode, ensure the photocell sensor is not obstructed by debris or direct artificial light.
  - If using the remote, ensure it is within the 100ft operating range and has a clear signal path.
- **Remote Control Not Responding:**
  - Replace the CR2032 battery in the remote control.
  - Ensure there are no significant obstructions between the remote and the power stake.

Specifications

Product Dimensions	8 x 5 x 3 inches
Item Weight	1.46 pounds
Model Number	SP-058A/TR-034-8
Voltage	125 Volts (AC)
Max Current/Wattage	13A / 1625W
Outlets	6 Grounded Outlets
Extension Cord Length	6FT
Remote Control Range	100FT (line of sight)
Remote Battery	1 CR2032 (included)

Certifications	UL Listed

Warranty and Support

For warranty information or technical support, please contact DEWENWILS customer service directly. Refer to the product packaging or the official DEWENWILS website for contact details.

Ask a question about this manual

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page's manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. Privacy details.

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question

Open the live page

https://manuals.plus/asin/B0CQNW8T4Z

More documents and user manuals: **https://manuals.plus/**