




AXXESS L3 Loudspeaker User Guide

[Home](#) » [AXXESS](#) » AXXESS L3 Loudspeaker User Guide 

Contents

- 1 AXXESS L3 Loudspeaker
- 2 Product Information
- 3 Product Usage Instructions
- 4 SAFETY INSTRUCTIONS
- 5 MAINTENANCE
- 6 ABOUT THE PRODUCT
- 7 UNPACKING
- 8 CONNECTING THE SPEAKERS
- 9 POSITIONING
- 10 BURN IN
- 11 SPECIFICATIONS
- 12 FAQs
- 13 Documents / Resources
 - 13.1 References



AXXESS L3 Loudspeaker



Specifications

- **Model:** AXXESS L3
- **Type:** Loudspeaker
- **Version:** Rev.1.0 ENG
- **Website for manual:** audiogroupdenmark.com

Product Information

The Axxess L-series loudspeaker offers an authentic musical experience with a deeper connection to the music. It features a ribbon tweeter for clear highs and a bass midrange designed for maximum stiffness and minimum noise. The cabinet is made of a natural-based composite material to eliminate sonic distortion and provide pure sound reproduction.

Safety Instructions

- Avoid bringing external metal objects close to the loudspeaker.
- Let the speaker reach room temperature before plugging it in to prevent condensation damage.
- Avoid using the product in damp settings and do not insert foreign objects into the bass reflex ports.

Maintenance

- Do not use a vacuum cleaner to remove dust; gently brush it away with a soft brush.
- Clean the surface with a damp cloth and do not expose the cabinets to direct sunlight.

Product Usage Instructions

Unpacking

1. Lay the transport box flat on a plane floor.

2. Remove the straps from the outer carton and pull the lid to reveal the inner box.
3. Open the inner box without using sharp instruments.
4. Put on protective gloves for further handling.
5. Lift the box to an upright position.

Connecting the Speakers

Follow the manufacturer's instructions for connecting the speakers to your audio system. Ensure proper polarity and secure connections to prevent damage.

Positioning

Place the speakers at ear level for optimal sound quality. Keep them away from walls to avoid sound distortion and position them symmetrically for balanced sound distribution.

Burn-In

Allow the speakers to run at moderate volumes for several hours to break them in and optimize their performance.

SAFETY INSTRUCTIONS

- Avoid bringing external metal objects close to the loudspeaker.
- The tweeter contains very strong magnets and close contact with metal objects can cause damage.
- The loudspeakers may be damaged due to distorted output signals from too weak, defective, or overloaded amplifiers.
- Use only high-quality amplifiers and run these within the specified power ratings.
-
- Let the speaker reach room temperature before plugging it in. Condensation may arise in the electronic circuitry when moving the speaker from cold to warm surroundings. Such moisture may damage the speaker's components.
- To protect the surface, please wear protective gloves when handling the loudspeaker. Never use the product in damp settings. Foreign bodies must not be inserted into the bass reflex ports of the speaker.
- Avoid touching the speaker elements.

MAINTENANCE

- Do not use a vacuum cleaner to remove dust from the loudspeaker elements. Brush it away gently with a soft brush.
- Do not use any detergent. It may discolor the finish.
- Clean the surface of the loudspeakers with a firmly wrung, damp cloth.
- Do not expose the cabinets to direct sunlight.

CONGRATULATIONS

- Thank you for choosing the Axxess L-series loudspeaker and congratulations on accessing Audio Group Denmark's unique audio universe.
- Handcrafted in Denmark, Axxess captures the essence of Ansuz, Aavik, and Børresen, reflecting a world of high-end audio equipment, where technological excellence and the aesthetics of Danish design go hand in hand with authentic musical performance.

- This Axxess loudspeaker promises not just an authentic musical experience but also a deeper connection to the music, allowing you to immerse yourself fully and experience the zenith of musical reproduction.

ABOUT THE PRODUCT

These Axxess loudspeakers promise not just an authentic musical experience but also a deeper connection to the music, allowing you to immerse yourself fully and experience the zenith of musical reproduction.

- **THE AXCESS RIBBON TWEETER**

The membrane in the new ribbon tweeter is in Kapton – which is a very lightweight material. Compared to a dome tweeter it is 25 times lighter and due to the ribbon tweeter principle, the area is two times bigger. Our ribbon tweeter technology ensures a more immersive listening experience, bringing you closer to the music.

- **THE BASS MIDRANGE**

In the Axxess loudspeaker magnet motor system, we use double copper caps on the pole rings to achieve high flux and low inductance. We have adopted the use of copper caps from the Børresen X-series. The meticulous engineering of our bass midrange ensures that you experience music with exceptional clarity and depth. The Axxess loudspeaker membrane is designed in-house by our skilled engineers and is developed to achieve maximum stiffness with minimum noise.

- **THE AXCESS CABINET**

The Axxess L-series cabinet and baffle are made of natural-based composite material. This material choice is an important characteristic and is designed to eliminate sonic distortion, allowing you to fully appreciate the music in its purest form. The finish is available in either painted satin black or white.




UNPACKING

Our loudspeaker models are protected during transport by stable and secure packaging. Due to their weight and dimensions, they are shipped in a special, double-layer box. Please consult your Audio Group Denmark dealer who in most cases will unpack and set up your new product.

1. Carefully lay the transport box flat on a plane floor.
2. Remove the straps from the outer carton and pull the lid to reveal the inner box.
3. Open the inner box. Do not use a knife or sharp instruments to break the tape.

4. Put on protective white gloves for further handling of the loudspeaker.
5. Now, lift the box to an upright position.
6. Pull the loudspeaker and the protective foam out of the box, sliding it on the bottom foam. Be careful not to tilt.
7. Remove the bottom foam by tilting the loudspeaker and then the remaining foam to unpack the loudspeaker completely.
8. Put the loudspeaker in the position you desire.
9. Please observe the guidelines for positioning and connecting your loudspeakers on pages 7 and 8.

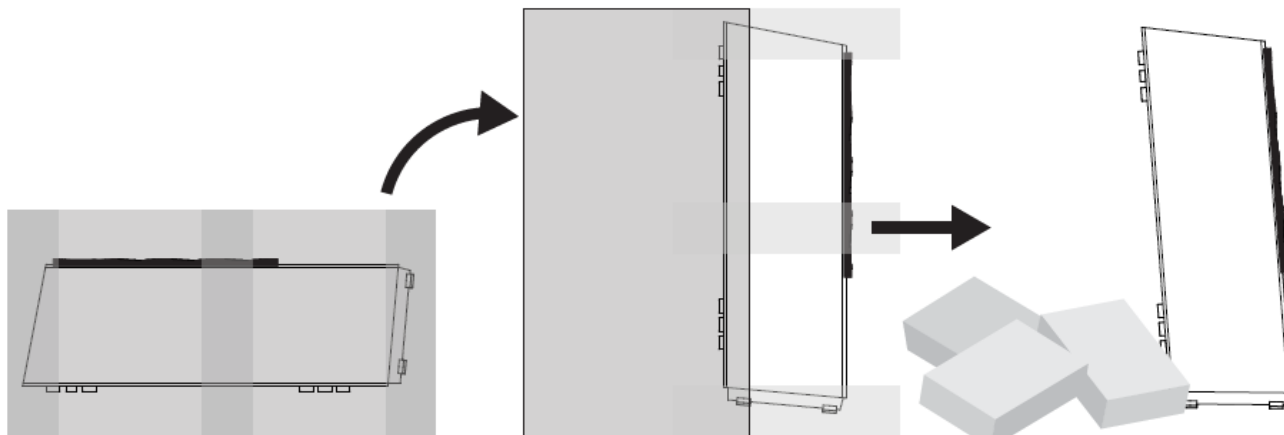


CONNECTING THE SPEAKERS

With every connection system, ensure that the contact is tight and has a proper contact area. Connectors with gold plating will typically offer the best results and remain corrosion-free. Please ensure that the positive and negative cables do not make contact with each other. Check the connectors from time to time to make sure that nothing has loosened.

1. Connect a two-pole (+/-) loudspeaker cable to the binding posts, located at the rear of the loudspeaker. The high-quality binding posts can accommodate only 4-mm-plugs ("banana plugs"). The pins can be put directly into the binding post without any tightening necessary.
2. Connect the other cable ends to the loudspeaker outputs of your switched-off amplifier.

CAUTION

- Distorted output signals from too weak, defective, or overloaded amplifiers may damage the loudspeakers.
- Use high-quality amplifiers only and run loudspeakers and amplifiers within specified power ratings.

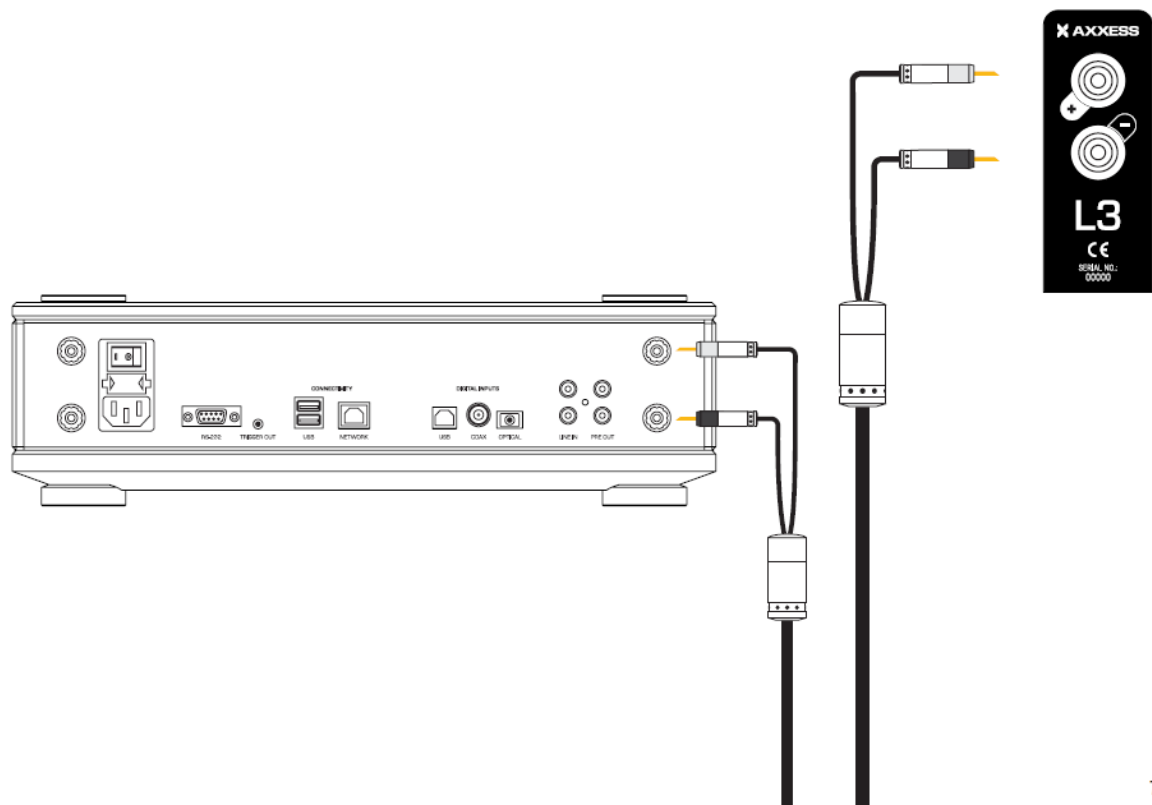

POSITIONING

The sound from loudspeakers depends very much on the room and on the way they are set up. Please consult your dealer for advice on how to set up your loudspeakers in your home. These guidelines are general and will give you a good starting point for further experimenting in finding out what is just the right setup for your room.

- **The distance from the side walls to the loudspeakers**


The loudspeakers are not that sensitive regarding getting too close to sidewalls. A distance of about 15 cm will be enough. Too short a distance to the side walls is likely to increase the amount of bass.

- **The distance between the rear of the loudspeakers and the wall behind them**

Start with a distance of 50 cm. This distance should be the same for both loudspeakers. Try the loudspeakers out with music you know and find out what distance gives the best sound. Greater distance = weaker bass, more precise bass, better precision, and bigger sound stage. Shorter distance = more and softer bass, and a smaller sound stage.


- **The distance between the loudspeakers and the listener**

The ideal distance between the loudspeakers is not less than 3 meters. Put the loudspeakers in an angle making the center point at the listener's shoulders. The lines should cross about one meter behind the listener's head, meaning that the listener should just be able to see the two inner sides of the speaker.

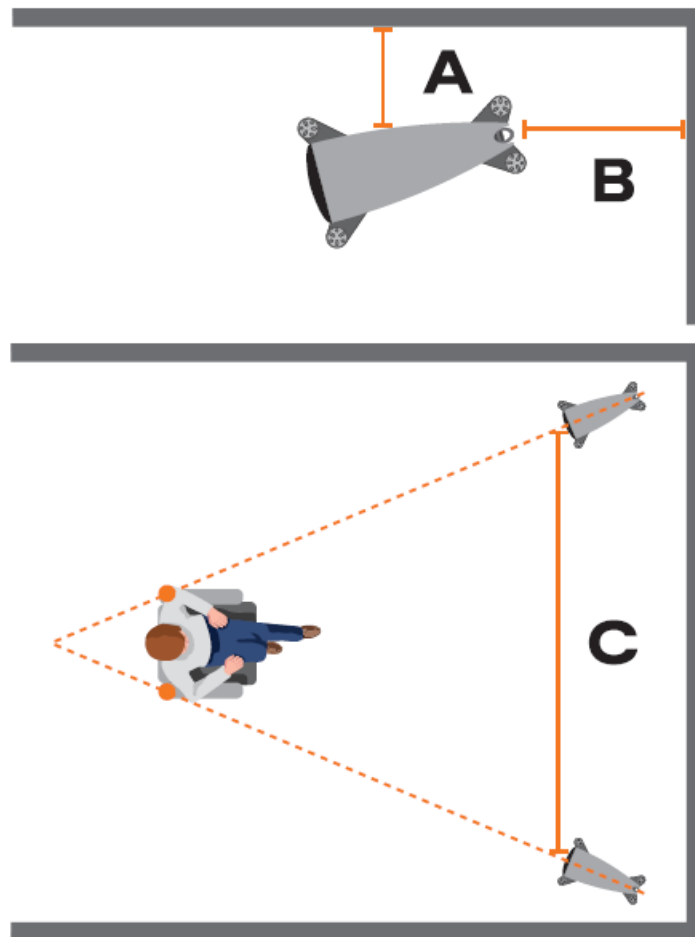

BURN IN

- All new high-quality loudspeakers need a certain period of burn-in time.
- As Axxess loudspeakers use long-stroke bus drivers with natural rubber surrounds, the loudspeakers need at least 50 – 100 hours of actual music playing at a decent sound level.
- You will notice a gradual improvement in sound quality.
- No particular precautions need to be taken during those hours.

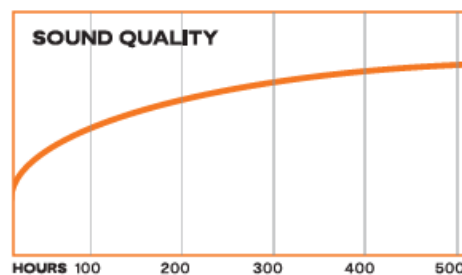

SPECIFICATIONS


DIMENSIONS	125,0 x 30,0 x 41,0 cm / 49,2 x 11,8 x 16,1 inch
WEIGHT	30,2 kg / 66,6 lbs
FREQUENCY RESPONSE	35 Hz – 22 kHz
SENSITIVITY	88 dB /1W
IMPEDANCE	>4 Ohm
RECOMMENDED AMP.	50W
1 X TWEETER	Axxess planar ribbon tweeter
1 X DRIVER	Axxess bass/midrange driver: 4.5 inches
1 X DRIVER	Axxess bass driver: 4,5 inches
FINISH	Black or white painted satin

- We would love to hear about your experience with this product.
- Don't hesitate to contact us with feedback or questions.
- info@audiogroupdenmark.com
- AUDIOGROUPDENMARK.COM
- Rev.1.0 ENG
- Please find the latest version of this manual on our website audiogroupdenmark.com Avoid bringing.g

FAQS

- **Q: Can I paint the cabinet of the loudspeaker?**
A: It is not recommended to paint the cabinet as it may affect the sonic characteristics of the loudspeaker.
- **Q: How should I clean the speaker elements?**
A: Use a soft brush to gently remove dust from the speaker elements. Do not use detergents as they may damage the finish.

Documents / Resources

	AXXESS L3 Loudspeaker [pdf] User Guide L3 Loudspeaker, Loudspeaker
---	---

References

-  [Hi-Fi | Amplifiers, Loudspeakers & Accessories - Audio Group Denmark](#)[Audio Group Denmark](#)
- [User Manual](#)

[Manuals+](#), [Privacy Policy](#)

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.