Manuals+ — User Manuals Simplified.

AZZA OVERDRIVE CSAZ-807 Computer Case User Manual

Contents

AZZA OVERDRIVE CSAZ-807 Computer Case

Model	
Model Name:	OVERDRIVE
Name:	CSAZ-807

Specifications	
Type:	ATX Tower
Color:	1.5~2.0mm SPCC+ 2.5mm Aluminum
Top Panel:	Aluminum and tempered glass wing

Max CPU Cooler Height:	Up to 80mm
Max GPU Length:	Up to 400mm long Video card (Horizontal)
Max Cooling Tube Reservoir Length:	UP to 300mm
Power Supply:	ATX
Motherboard Compatibility:	<305x280mm E-ATX, ATX, Micro ATX, Mini ITX
Expansion	
External 5.25″ Drive Bays:	0
Internal 2.5″ Drive Bays:	Up to 2
Internal 3.5″ Drive Bays:	Up to 2 (Convertible with 2.5″SSD x 2)
Expansion slots:	2
Front Ports:	3xUSB 3.0, HD Audio, Type C, Metal power button
Physical Specifications	
Metal Chassis Dimensions (HxWxD)	440x570x590mm/17.3×22.4×23.2 inch
Weight:	15kg /33.1lbs
Features	

Outer Appearance:	All external panels are made of aluminum with two glass top panel, gull-wing panel design makes it easy to adjust and clean on usually.
Available Fan Ports:	Front: 1 x 200mm fan port (1x 200mm Addressable RGB fan included) Top: 6 x 120mm/ 4 x 140mm fan ports Sides: 6 x 120mm fan ports
Water Cooling:	Top: Supports radiators up to 280/360mm x 1 Sides: Supports radiators up to 360mm x 2
Isolated Chamber:	ATX Power supply inside its own isolated chamber, preventing its heat from affecting other components
Easy Installation Cooler:	A pre-cut hole for easy installation of CPU Cooler, eliminating the need to remove the motherboard
Accessories	Radiator bracket x 2 – Support 280/360mm on top two sides. 30cm PCI-E 3.0 extension cable for VGA card(Support EATX, ATX MB) AZZA Hub x1

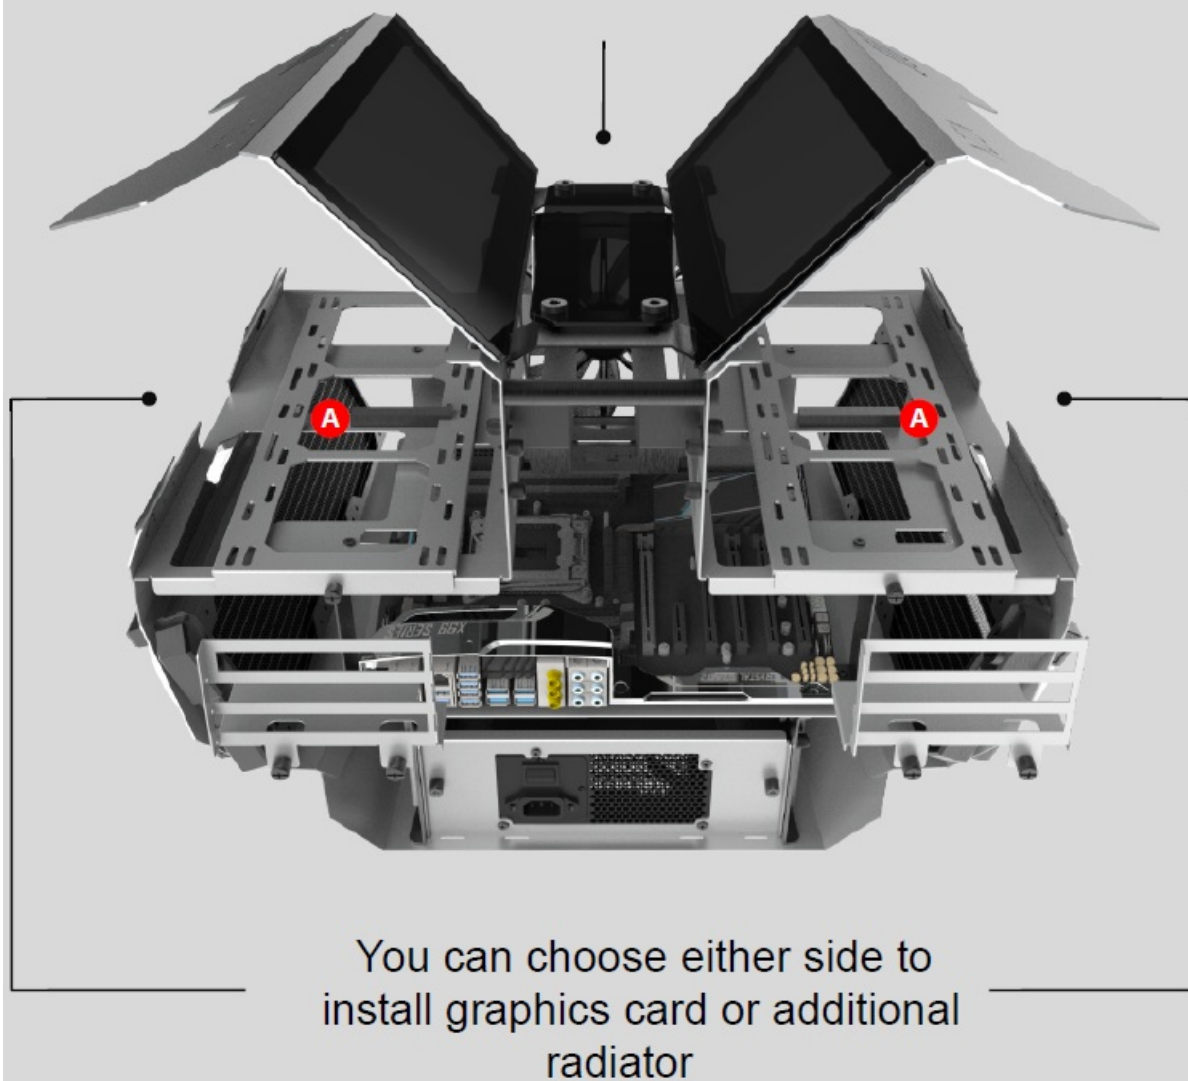360 mm radiator
or 6*120 mm fan ports on the sides
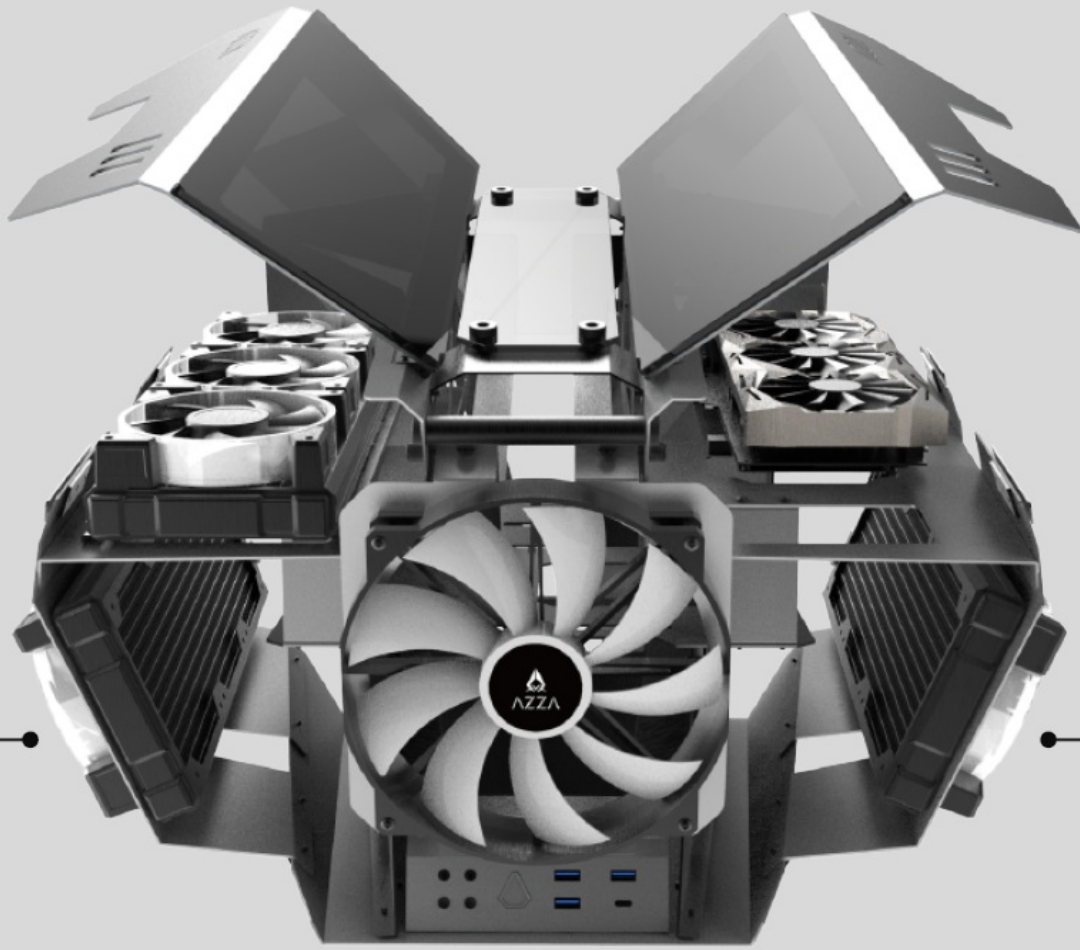
200mm Addressable RGB Fan included

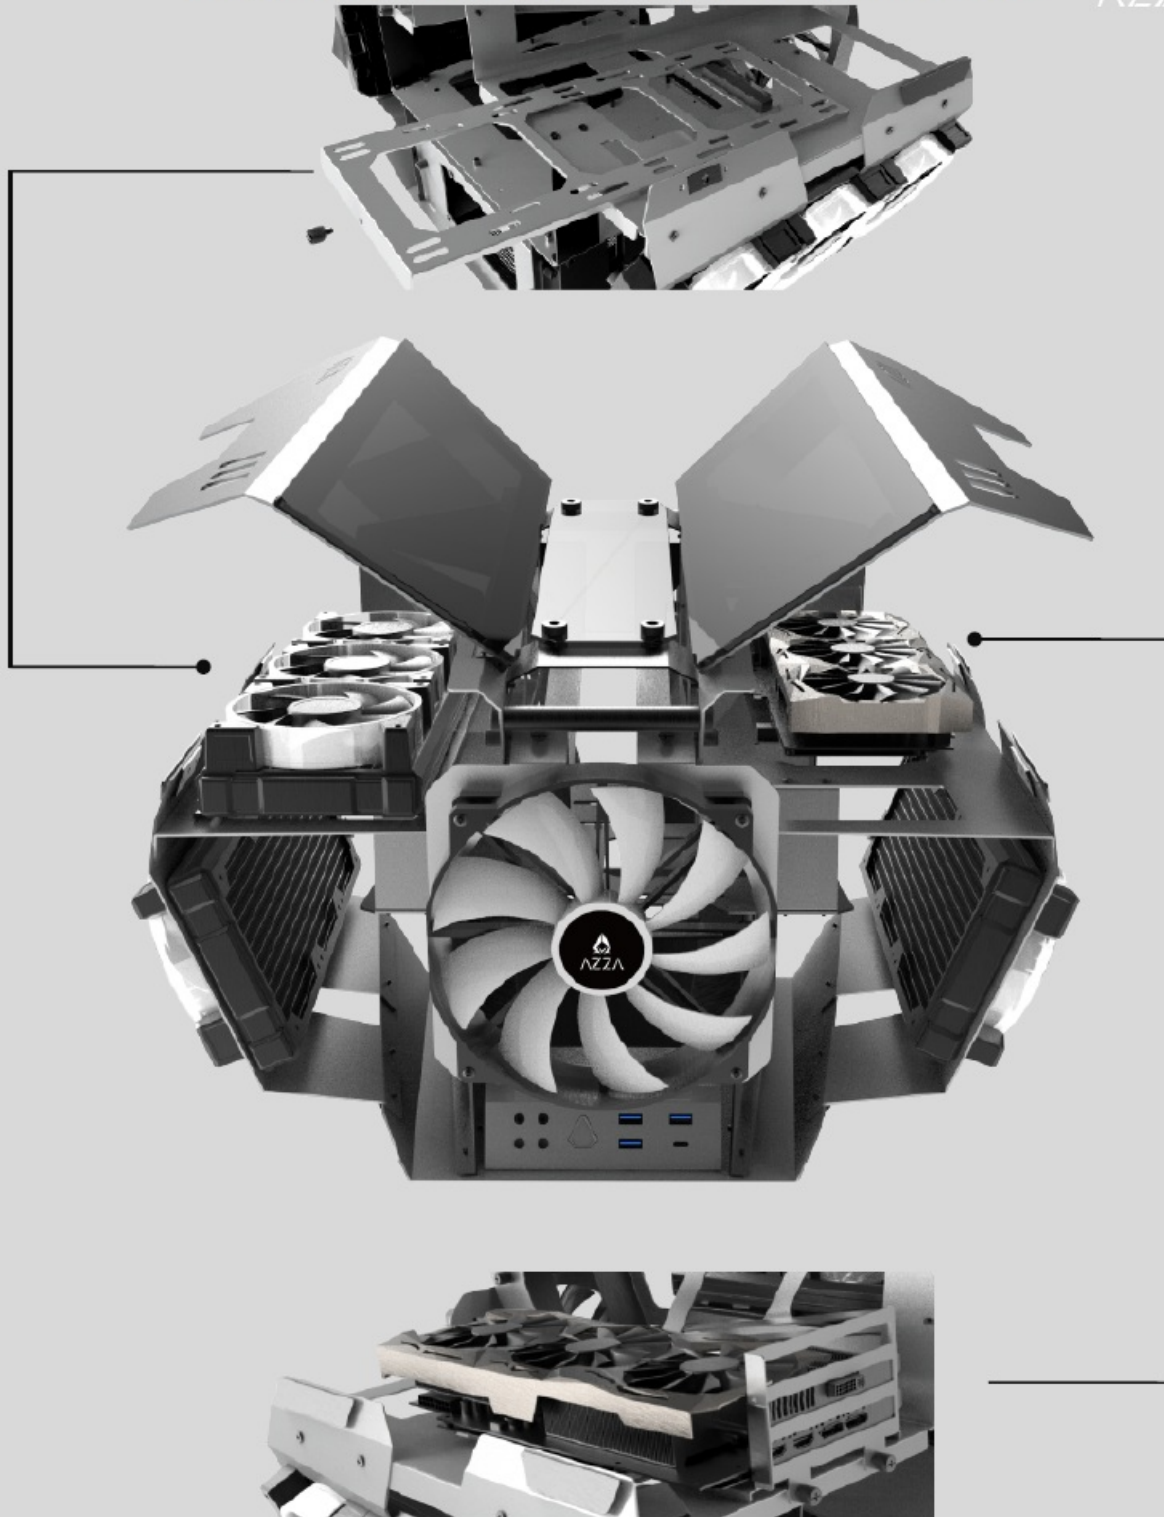**Front I/O:**
Reset / Led / HD Audio / USB3.0*3 / Type C

Install Reservoir/Pump Combo

You can choose either side to install graphics card or additional radiator

Graphics card rubber holder:
Before installing the graphics card, please stick the rubber holder.(Graphics card rubber holder in the tooling package)
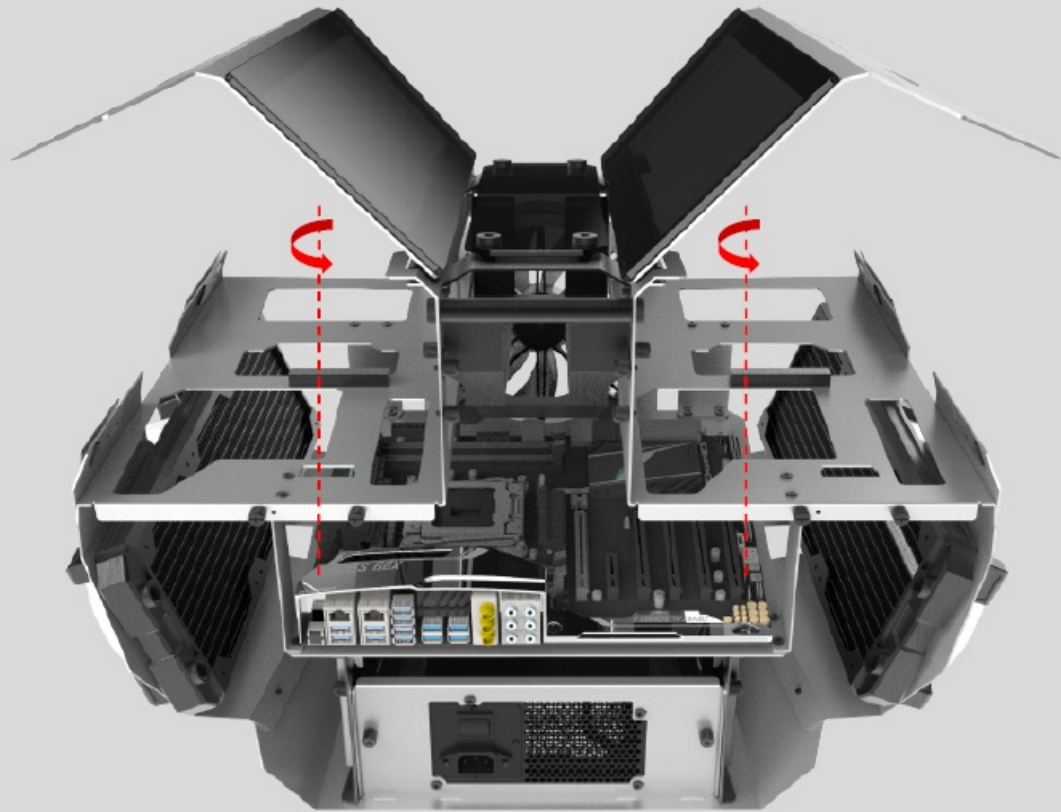
Supports up to 280 mm or 360 mm radiator
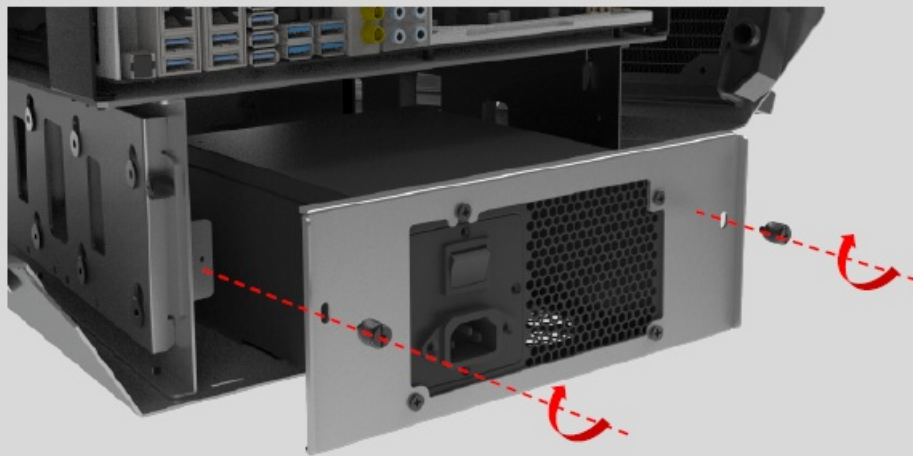
Graphics card length up to 400 mm / 3 slots

Motherboard Installation
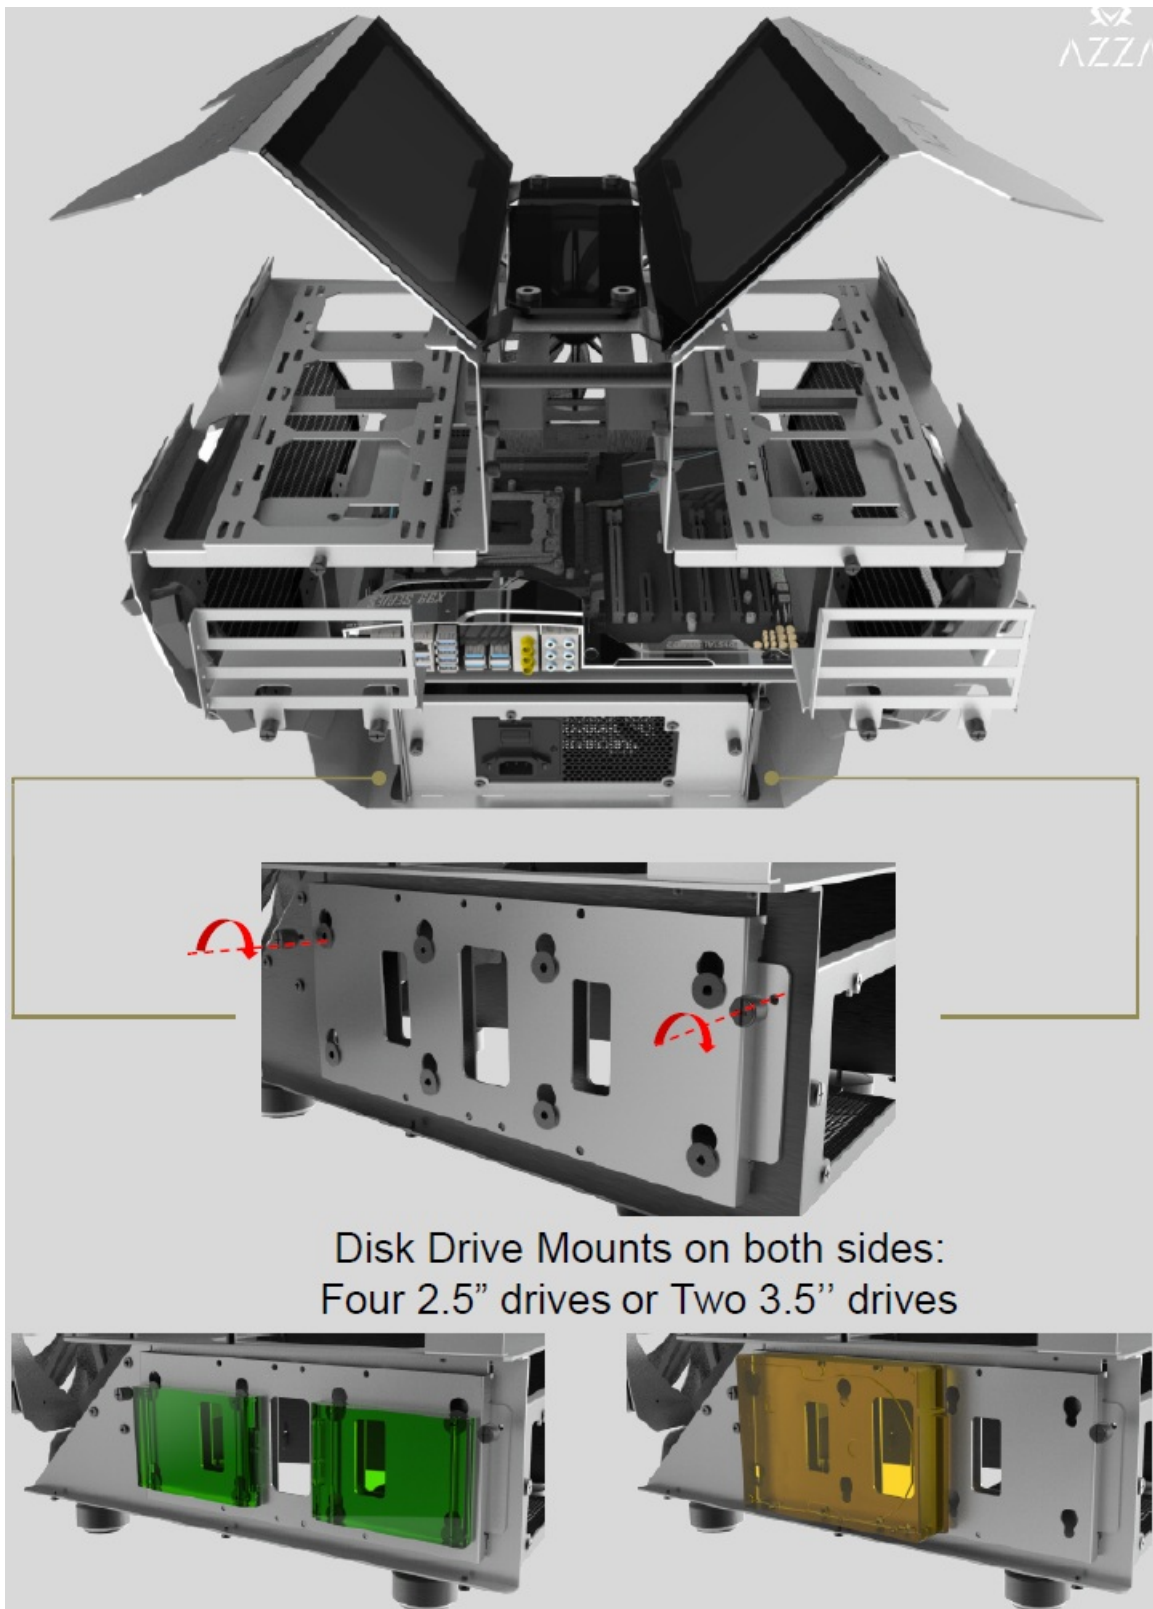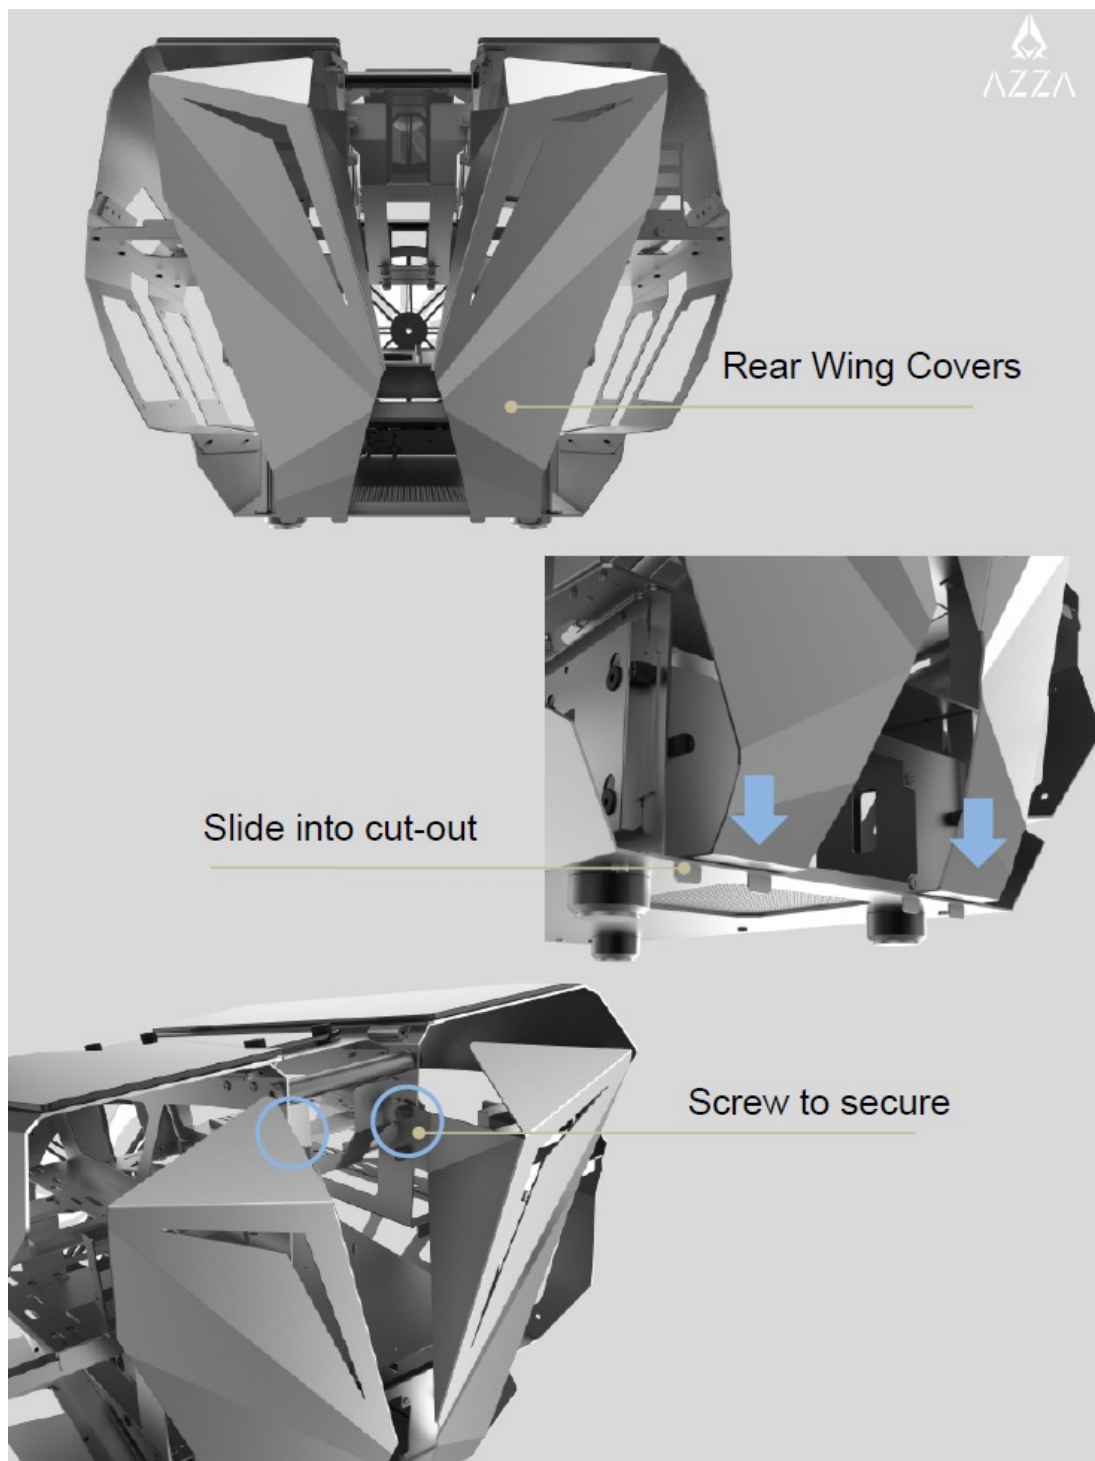
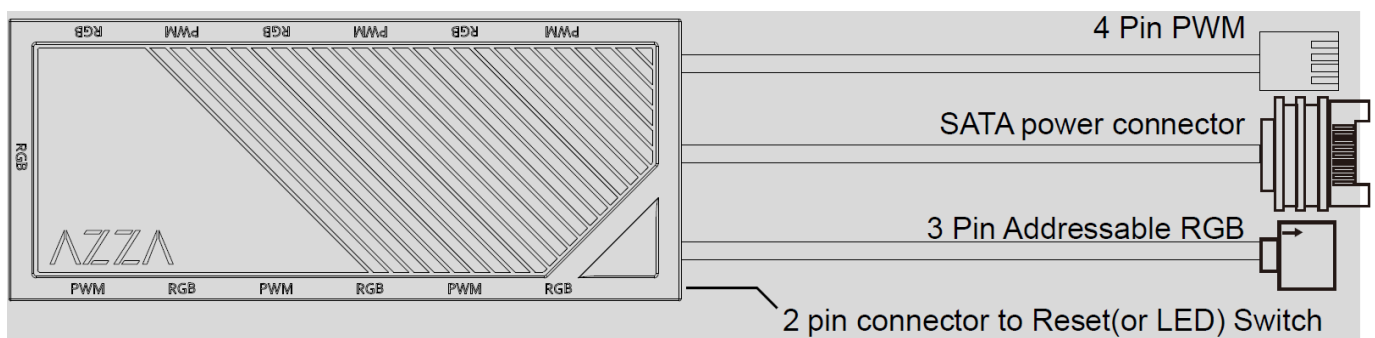## Motherboard Installation

Power Supply Installation

Disk Drive Mounts

Disk Drive Mounts on both sides:
Four 2.5" drives or Two 3.5'' drives

Rear Wing Covers

Slide into cut-out

Screw to secure

Ports and Connectors

RGB PWM RGB PWM RGB PWM

RGB

AZZA

PWM RGB PWM RGB PWM RGB

4 Pin PWM

SATA power connector

3 Pin Addressable RGB

2 pin connector to Reset(or LED) Switch

1. 7×3 pin ARGB ports (supports ARGB devices: ARGB fan, ARGB strips…etc)
2. 6×4 pin PWM fan ports

3. 1×2 pin connector to Reset (or LED) switch

4. 1xSATA power connector

5. 1×3 pin ARGB connector to MB

6. 1x4pin PWM fan connector to MB

Functions

1. Total of 17 lighting modes

2. Lighting modes can be controlled by Reset (or LED) switch, or can be controlled by MB.

(Hold the LED button for 3 seconds to switch the RGB control function between motherboard RGB software and LED button)

1. Magnet on the back of the hub box or using velcro on the back of the hub box, it can put in any place inside the metal part of the case.

2. 6 sets of ARGB port next to PWM port to ease the connection on fans
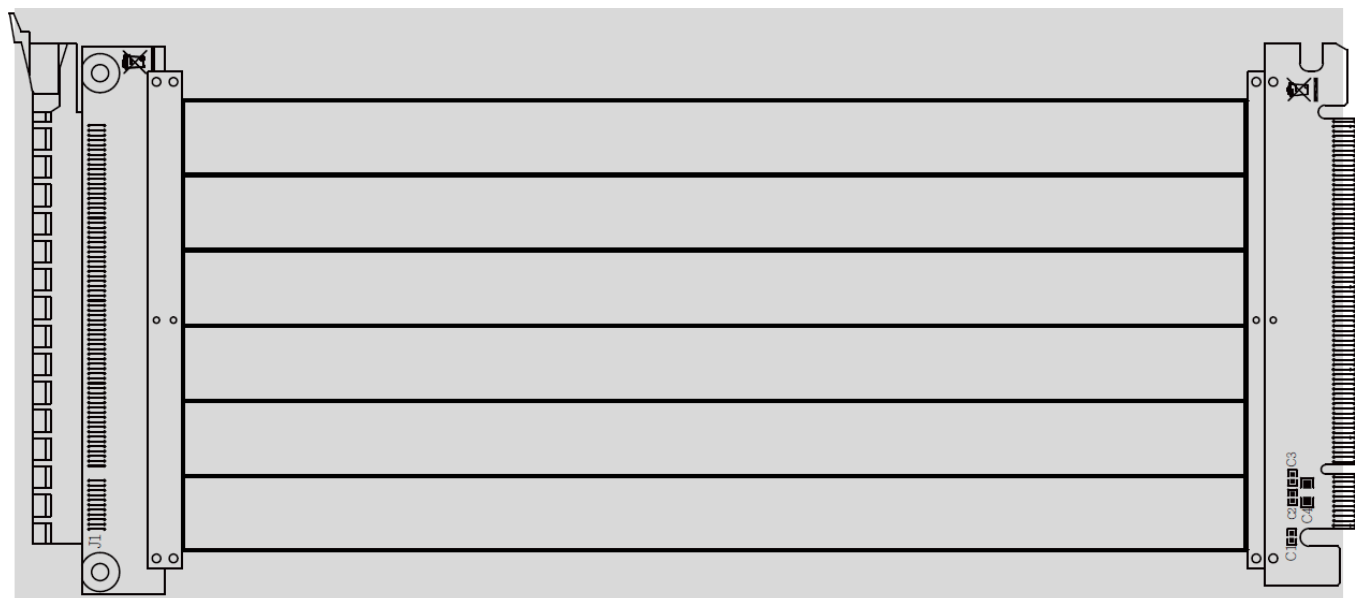
300 mm PCI-E 3.0 Cable(Support EATX, ATX Motherboard)

Documents / Resources

AZZA OVERDRIVE CSAZ-807 Computer Case [pdf] User Manual
OVERDRIVE CSAZ-807, Computer Case