Saved from manuals.plus.
Open the live page for links to other documents and user manuals.

Dpofirs Dpofirsgpbak05ozg

Visual Doorbell Camera User Manual

Model: Dpofirsgpbak05ozg

1. Product Overview

The Dpofirs Visual Doorbell Camera system is designed to enhance your home security by providing clear visual and audio communication with visitors at your door. It consists of an outdoor doorbell unit and an indoor monitor, enabling convenient remote video calls and two-way intercom functionality.



Figure 1: The Dpofirs Visual Doorbell Camera system includes an outdoor doorbell unit and an indoor monitor for viewing visitors.

Key Features:

- **Remote Video Call:** View outdoor camera video from the indoor monitor, ideal for all family members.
- **Two-Way Intercom:** High-fidelity microphone and powerful speaker ensure clear and smooth conversations.
- **Wide Angle Lens:** Captures a broad view, minimizing blind spots for enhanced security.
- **1080P HD Camera:** Records clear, detailed videos, allowing precise identification of visitors.

- **Day and Night Vision:** Equipped with infrared night vision lights and an ICR filter for automatic switching and clear images in darkness.
- **Wireless Transmission:** Patented technology ensures stable connection even during power or network disruptions.

2. Package Contents

Please verify that all items listed below are included in your package:

- Outdoor Doorbell Unit
- Indoor Monitor
- USB-C Charging Cable
- Mounting Plates (for doorbell and monitor)
- Mounting Screws and Wall Anchors
- Adhesive Pads
- User Manual (this document)



Figure 2: All components included in the Dpofirs Visual Doorbell Camera package.

3. Setup Instructions

3.1 Charging the Indoor Monitor

Before first use, ensure the indoor monitor is fully charged. Connect the provided USB-C cable to the monitor and a compatible USB power adapter (not included).



Figure 3: The indoor monitor can be powered continuously by connecting it to a standard phone charger via its Type-C port.

3.2 Mounting the Doorbell Unit

1. Choose a suitable location near your front door, ensuring a clear view and stable surface.
2. Use the mounting plate as a template to mark drill holes.
3. Drill holes and insert wall anchors if necessary.
4. Secure the mounting plate to the wall using the provided screws.
5. Attach the doorbell unit to the mounted plate.

3.3 Mounting the Indoor Monitor

1. Select a central location inside your home where the monitor can be easily seen and accessed.
2. The monitor can be placed on a flat surface using its built-in stand or mounted on a wall using its dedicated mounting plate.
3. If wall-mounting, follow similar steps as for the doorbell unit.

3.4 Initial Pairing and Operation

The doorbell and monitor are typically pre-paired. If not, or if you need to re-pair:

1. Ensure both devices are powered on.
2. Long press the button on the doorbell unit until the indicator light flashes.
3. On the indoor monitor, open the display and wait for a period of time. The doorbell and monitor should automatically connect.
4. Once connected, the monitor will display the live view from the doorbell camera.

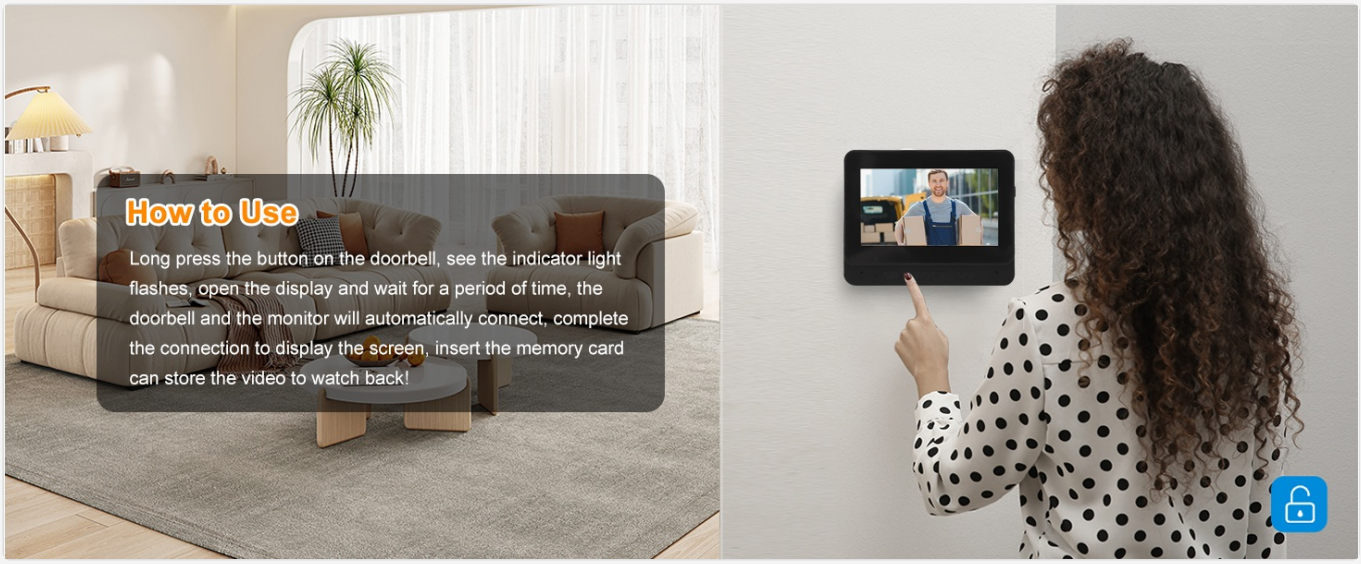


Figure 4: Simple operation allows users to easily view and communicate through the doorbell system.

For video recording and storage, insert a compatible memory card (not included) into the designated slot on the indoor monitor. This allows you to review past events.

4. Operating Instructions

4.1 Receiving a Call

When a visitor presses the doorbell button, the indoor monitor will ring and automatically display the live video feed from the outdoor unit. You can then engage in two-way communication.



Figure 5: Engage in clear two-way audio and video communication with visitors through the doorbell and indoor monitor.

4.2 Remote Viewing

The indoor monitor allows you to view the outdoor camera's feed at any time, even without a doorbell press. This is particularly useful for checking who is at the door before answering.



Figure 6: The doorbell features a wide-angle lens, allowing for a broad view of the area outside your door without needing to open it.

4.3 Night Vision

The doorbell camera automatically activates its infrared night vision in low-light conditions, providing clear black-and-white images. This ensures continuous surveillance day and night.

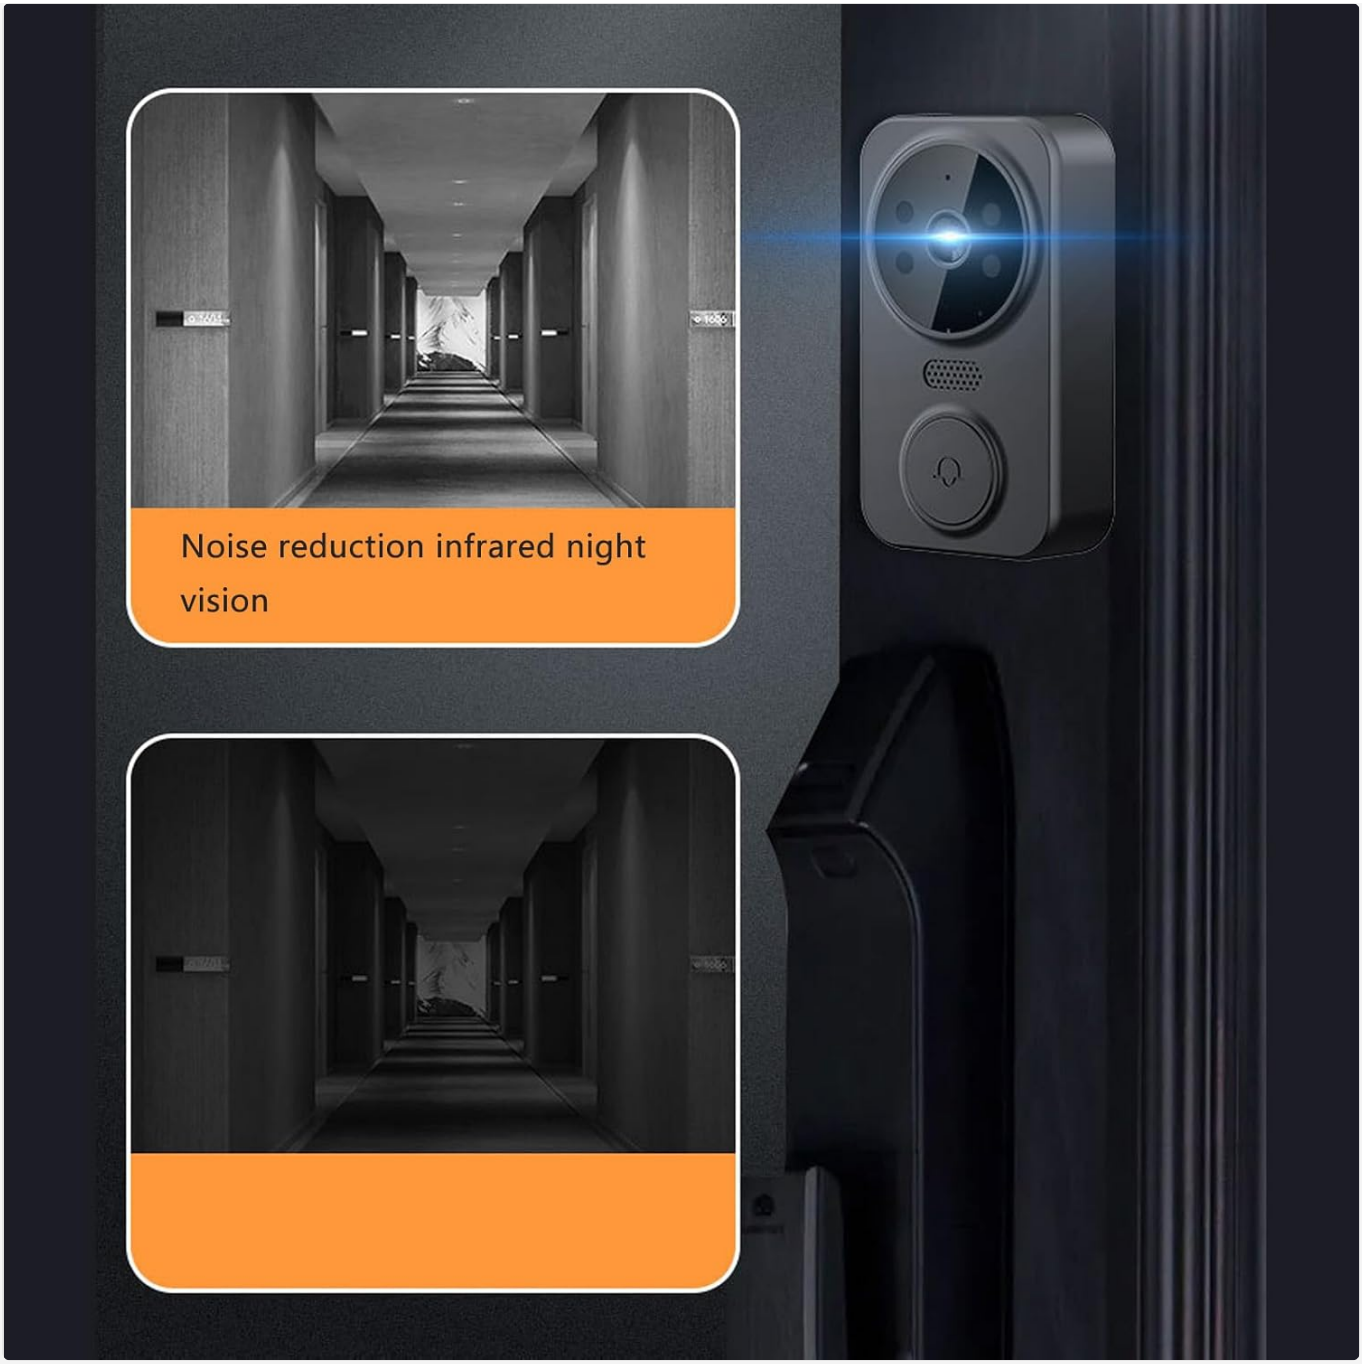


Figure 7: Equipped with infrared night vision, the doorbell provides clear images even in low-light or completely dark conditions.



Figure 8: The doorbell camera automatically switches between day and night modes, providing clear surveillance around the clock.

5. Maintenance

To ensure optimal performance and longevity of your Visual Doorbell Camera, follow these maintenance guidelines:

- **Cleaning:** Gently wipe the camera lens and monitor screen with a soft, dry, lint-free cloth. Avoid using abrasive cleaners or solvents.
- **Placement:** Ensure the outdoor doorbell unit is protected from direct heavy rain or extreme weather conditions if possible, though it is designed for outdoor use.
- **Battery Life:** Keep the indoor monitor charged to ensure continuous operation. For extended periods of non-use, fully charge the monitor before storing.
- **Firmware Updates:** Check the manufacturer's website periodically for any available firmware updates to improve performance and add new features.

6. Troubleshooting

If you encounter issues with your Visual Doorbell Camera, please refer to the following common problems and solutions:

Problem	Possible Cause	Solution
No video on indoor monitor	Monitor is off or battery is low; Doorbell unit is off or out of range; Pairing issue.	Ensure monitor is charged and powered on. Check doorbell unit's power. Re-pair devices as per Section 3.4. Move devices closer if range is an issue.
No audio during two-way intercom	Microphone or speaker obstruction; Volume too low; Connection issue.	Check for any physical obstructions on the microphone/speaker. Adjust volume settings on the monitor. Ensure stable wireless connection.
Poor video quality / blurry image	Dirty camera lens; Insufficient lighting (at night); Wireless interference.	Clean the camera lens with a soft cloth. Ensure night vision is active in dark conditions. Reduce interference by moving other wireless devices.
Doorbell not ringing the monitor	Doorbell button malfunction; Pairing issue; Monitor is off or muted.	Test the doorbell button. Re-pair devices. Check monitor's power and ensure it's not muted.

If the problem persists after trying these solutions, please contact Dpofirs customer support for further assistance.

7. Specifications

Feature	Detail
Brand	Dpofirs
Model Name	Dpofirsgpbak05ozg
Connectivity Technology	Wireless
Special Feature	Night Vision, Wireless Charging (for monitor)

Feature	Detail
Item Weight	15.2 ounces
Package Dimensions	7.87 x 5.91 x 1.97 inches
Manufacturer	Dpofirs
Batteries Required?	No (system is powered via charging/wireless transmission)

8. Warranty and Support

For warranty information and customer support, please refer to the documentation included with your purchase or visit the official Dpofirs website. You can also contact their customer service team directly for assistance with product setup, troubleshooting, or any other inquiries.

© 2025 Dpofirs. All rights reserved.

Ask a question about this manual

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page's manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. Privacy details.

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question

Answered questions about this manual

Is there an app to view the Dpofirs Dpofirsgpbak05ozg Visual Doorbell Camera on your phone?

Based on the provided user manual for the Dpofirs Dpofirsgpbak05ozg Visual Doorbell Camera, there is no mention of a smartphone app for viewing the camera. The system is designed with an outdoor doorbell unit...

Read full answer

Open the live page

https://manuals.plus/asin/B0CQX5HSJ5

More documents and user manuals: **https://manuals.plus/**