



BALLUFF BES05KH Inductive Standard Sensors Owner's Manual


[Home](#) » [BALLUFF](#) » BALLUFF BES05KH Inductive Standard Sensors Owner's Manual 

Contents


- [1 BALLUFF BES05KH Inductive Standard Sensors](#)
- [2 Dimension](#)
- [3 Inductive Sensors](#)
- [4 Documents / Resources](#)
 - [4.1 References](#)
- [5 Related Posts](#)

BALLUFF

BALLUFF BES05KH Inductive Standard Sensors



Dimension

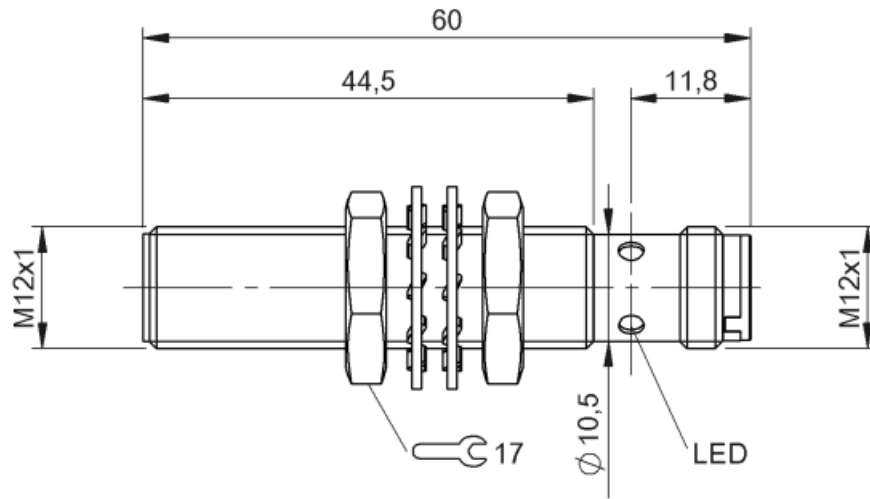

- **Basic features**

- **Approval/Conformity** CE cULus EAC WEEE
- **Basic standard** IEC 60947-5-2

- **Display/Operation**

- **Function indicator** yes
- **Power indicator** no

- **Electrical connection**

- **Connection** M12x1-Male, 3-pin, A-coded
- **Polarity reversal protected** yes
- **Protection against device mix-ups** yes
- **Short-circuit protection** yes

- **Electrical data**

- **Load capacitance max. at Ue** 1.5 μ F
- **Min. operating current Im** 0 mA
- **No-load current Io max., damped** 11 mA
- **No-load current Io max., undamped** 7 mA
- **Operating voltage Ub** 10...30 VDC
- **Output resistance Ra** 47.0 kOhm
- **Protection class** II
- **Rated insulation voltage Ui** 250 V AC
- **Rated operating current Ie** 200 mA
- **Rated operating voltage Ue** DC 24 V
- **Rated short circuit current** 100 A
- **Ready delay tv max.** 35 ms
- **Residual current Ir max.** 100 μ A
- **Ripple max. (% of Ue)** 15 %
- **Switching frequency** 500 Hz
- **Utilization category** DC -13
- **Voltage drop static max.** 1.3 V

- **Environmental conditions**

- **Ambient temperature** -25...70 °C

- **Contamination scale** 3
- **EN 60068-2-27, Shock** Half-sinus, 30 g , 11 ms
- **EN 60068-2-6, Vibration** 55 Hz, amplitude 1 mm, 3×30 min
- **IP rating** IP68, according to BWN Pr 20
- **Functional safety**
MTTF (40 °C) 625 a
- **Interface**
Switching output PNP normally open (NO)
- **Material**
 - **Housing material** Brass, Nickel-free coated
 - **Material sensing surface** PBT
- **Mechanical data**
 - **Dimension** Ø 12 x 60 mm
 - **Installation** quasi-flush
 - **Tightening torque** 10 Nm
- **Range/Distance**
 - **Assured operating distance Sa** 6.1 mm
 - **Hysteresis H max. (% of Sr)** 20 %
 - **Rated operating distance Sn** 8 mm
 - **Real switching distance sr** 8 mm
 - **Repeat accuracy max. (% of Sr)** 10 %
 - **Switching distance marking** ■■■■■
 - **Temperature drift max. (% of Sr)** 10 %
 - **Tolerance Sr** ±10 %

Inductive Sensors

BES M12MG1-PSC80B-S04G Order Code: BES05KH

Remarks


The sensor is functional again after the overload has been eliminated.

Quasi-flushed: See installation instructions for inductive sensors with extended range 825356.


For more information about MTTF and B10d see MTTF / B10d Certificate

Indication of the MTTF- / B10d value does not represent a binding composition and/or life expectancy assurance; these are simply experiential values with no warranty implications. These declared values also do not extend the expiration period for defect claims or affect it in any way.

Connector Drawings




Wiring Diagrams



www.balluff.com

Documents / Resources

	BALLUFF BES05KH Inductive Standard Sensors [pdf] Owner's Manual BES M12MG1-PSC80B-S04G, BES05KH Inductive Standard Sensors, BES05KH, Inductive Standard Sensors, Inductive Sensors, Sensors
--	--

References

- [Homepage - Balluff](#)