

[manuals.plus](#) /

› [Portronics](#) /

› [Portronics Bubble 2.0 Wireless Keyboard User Manual](#)

Portronics Bubble 2.0

Portronics Bubble 2.0 Wireless Keyboard User Manual

Model: Bubble 2.0 (POR-375)

1. INTRODUCTION

The Portronics Bubble 2.0 is a versatile wireless keyboard designed for enhanced productivity across multiple devices. It features dual connectivity modes (Bluetooth 5.3 and 2.4 GHz) and a compact tenkeyless (TKL) design, making it suitable for various environments, including home, office, and travel. This manual provides detailed instructions for setting up, operating, and maintaining your keyboard.



Compact Design

Tenkeyless layout, ideal for clutter-free desk organization

Figure 1: Compact Tenkeyless Design of the Portronics Bubble 2.0 Keyboard.

2. PACKAGE CONTENTS

- Portronics Bubble 2.0 Wireless Keyboard
- USB Receiver (located in the battery compartment)
- USB Cable
- User Manual (this document)

Note: Two AAA batteries are required for operation and are not included in the package. The USB receiver is stored within the keyboard's battery compartment for convenience.

Multimedia Shortcut Keys

One-touch access to multimedia functions for easy control

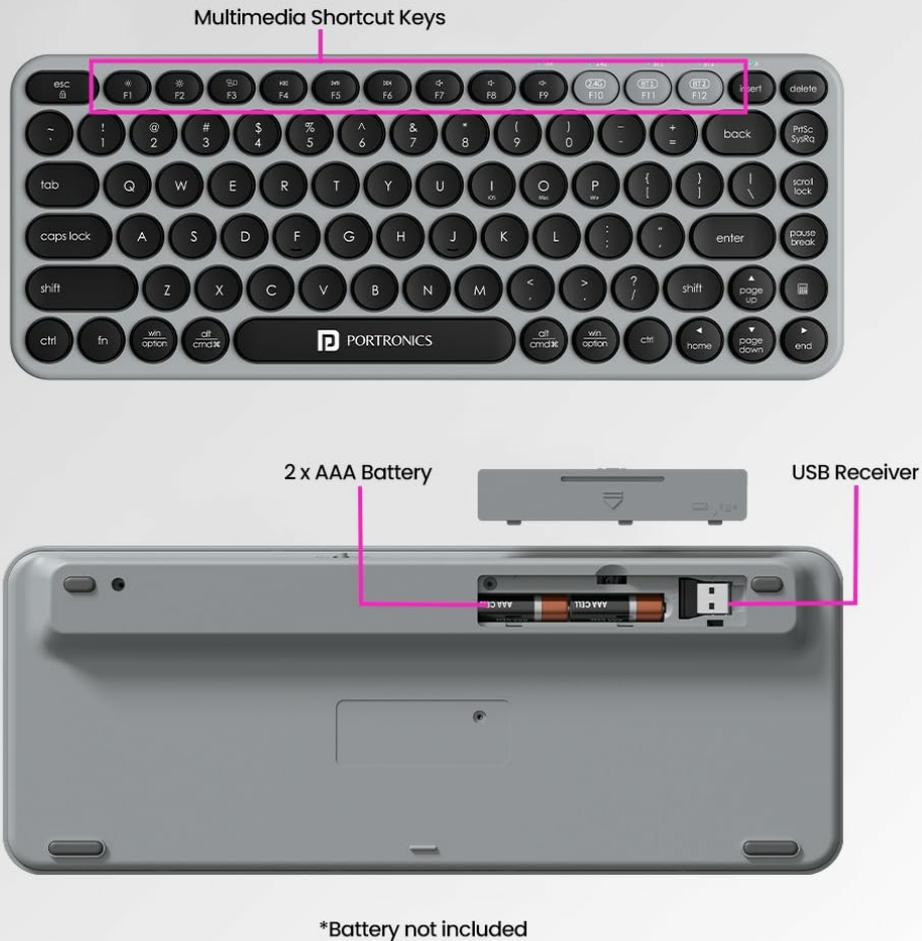


Figure 2: Battery Compartment and USB Receiver Storage.

3. SETUP

3.1 Battery Installation

1. Locate the battery compartment on the underside of the keyboard.
2. Open the battery compartment cover.
3. Insert two AAA batteries, ensuring correct polarity (+/-).
4. Close the battery compartment cover.

3.2 Powering On/Off

Locate the On/Off switch on the keyboard and slide it to the 'On' position to power on the device. Slide it to 'Off' when not in use to conserve battery life.

3.3 Connecting to Devices

The Portronics Bubble 2.0 keyboard supports dual wireless connectivity (Bluetooth 5.3 and 2.4 GHz) and can pair with up to three devices simultaneously.

Bluetooth 5.3 & 2.4 GHz Receiver

Get more done with easy setup and dual connectivity choices



Figure 3: 2.4 GHz Wireless Connectivity via USB Receiver.

3.3.1 2.4 GHz Wireless Connection (Device 1)

1. Retrieve the 2.4 GHz USB receiver from the keyboard's battery compartment.
2. Plug the USB receiver into an available USB port on your computer or laptop.
3. The keyboard should automatically connect to your device. The 2.4G indicator light on the keyboard will illuminate briefly.

3.3.2 Bluetooth 5.3 Connection (Device 2 & 3)

1. Ensure the keyboard is powered on.
2. Press and hold the **Fn + BT1** key combination for 3-5 seconds to enter Bluetooth pairing mode for Device 2. The BT1 indicator light will flash rapidly.
3. On your device (e.g., smartphone, tablet, PC), go to Bluetooth settings and search for available devices.
4. Select "Portronics Bubble 2.0" from the list.
5. Once paired, the BT1 indicator light will stop flashing and remain solid.
6. Repeat steps 2-5 using **Fn + BT2** for Device 3.



Multi-Device Connectivity

Connect 3 devices at once and easily switch between them for multitasking

Figure 4: Multi-Device Connectivity.

4. OPERATING THE KEYBOARD

4.1 Switching Between Connected Devices

To switch between your paired devices:

- Press **Fn + 2.4G** to switch to the device connected via the USB receiver.
- Press **Fn + BT1** to switch to the first Bluetooth-connected device.
- Press **Fn + BT2** to switch to the second Bluetooth-connected device.

4.2 Multimedia Shortcut Keys

The top row of the keyboard features multimedia hotkeys for quick access to various functions. These keys typically require pressing the **Fn** key simultaneously with the desired function key (F1-F12).

Table 1: Multimedia Shortcut Key Functions

| Key Combination | Function |
|-----------------|-----------------|
| Fn + F1 | Brightness Down |

| Key Combination | Function |
|-----------------|-----------------------------|
| Fn + F2 | Brightness Up |
| Fn + F3 | Mission Control / Task View |
| Fn + F4 | Previous Track |
| Fn + F5 | Play/Pause |
| Fn + F6 | Next Track |
| Fn + F7 | Mute Volume |
| Fn + F8 | Volume Down |
| Fn + F9 | Volume Up |
| Fn + F10 | (Function may vary by OS) |
| Fn + F11 | (Function may vary by OS) |
| Fn + F12 | (Function may vary by OS) |

Multimedia Shortcut Keys


One-touch access to multimedia functions for easy control

Multimedia Shortcut Keys



2 x AAA Battery

USB Receiver

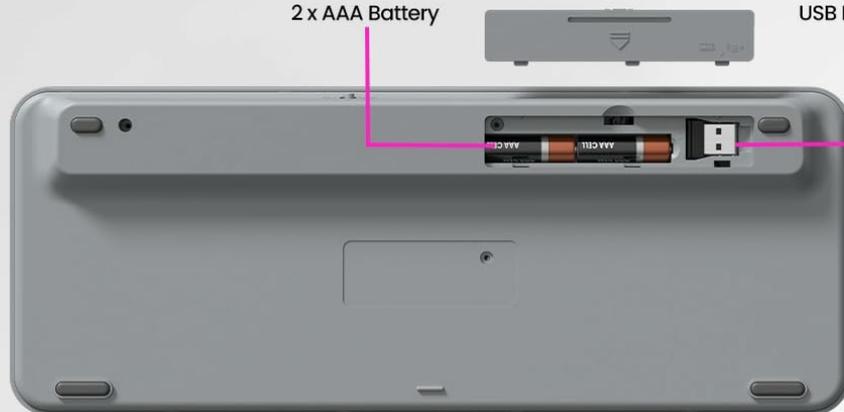

*Battery not included

4.3 Auto-Standby Mode

To conserve battery life, the keyboard features an auto power-saving mode. After 10 minutes of inactivity, the keyboard will enter sleep mode. To wake the keyboard, simply press any key.



Figure 6: Auto Power-Saving Feature.

4.4 Noiseless Typing

The Portronics Bubble 2.0 keyboard is designed with noiseless keys, allowing for quiet typing. This feature helps minimize distractions for both the user and those in the surrounding environment.

Noiseless Typing

Type silently and focus with noise-free keyboard keys



Figure 7: Noiseless Typing Experience.

4.5 Broad Compatibility

The keyboard is compatible with a wide range of operating systems, including Windows, Android, iOS, and macOS. It works seamlessly with PCs, laptops, smartphones, and tablets.

Broad Compatability

No more compatibility worries –
one keyboard, many devices



Figure 8: Broad Device Compatibility.

5. MAINTENANCE

- **Cleaning:** Use a soft, dry cloth to clean the keyboard surface. For stubborn dirt, a slightly damp cloth can be used, ensuring no liquid enters the keyboard.
- **Battery Replacement:** Replace AAA batteries when the low battery indicator light illuminates or when performance degrades. Always use new batteries of the same type.
- **Storage:** Store the keyboard in a cool, dry place away from direct sunlight and extreme temperatures. If storing for an extended period, remove the batteries.
- **USB Receiver:** When not in use, store the USB receiver in its designated slot within the battery compartment to prevent loss.

6. TROUBLESHOOTING

Table 2: Common Troubleshooting Steps

| Problem | Solution |
|---------|----------|
|---------|----------|

| Problem | Solution |
|--------------------------------|---|
| Keyboard not responding | <ul style="list-style-type: none"> ◦ Ensure the keyboard is powered on. ◦ Check battery levels and replace if necessary. ◦ Verify the correct connection mode (2.4G, BT1, BT2) is selected. ◦ For 2.4 GHz, ensure the USB receiver is securely plugged in. ◦ For Bluetooth, ensure Bluetooth is enabled on your device and the keyboard is paired. |
| Lag or intermittent connection | <ul style="list-style-type: none"> ◦ Ensure the keyboard is within the 10-meter operating range. ◦ Reduce interference by moving away from other wireless devices. ◦ Re-pair the keyboard with your device. |
| Keys not functioning correctly | <ul style="list-style-type: none"> ◦ Clean the keyboard to remove any debris under the keys. ◦ Ensure the keyboard is not in a specific mode that alters key functions (e.g., gaming mode, if applicable). |
| Cannot pair via Bluetooth | <ul style="list-style-type: none"> ◦ Ensure the keyboard is in Bluetooth pairing mode (indicator light flashing). ◦ Forget the device from your device's Bluetooth settings and try pairing again. ◦ Ensure your device's Bluetooth is enabled and discoverable. |

7. SPECIFICATIONS

Table 3: Product Specifications

| Feature | Detail |
|--------------------------------|---|
| Brand | Portronics |
| Model Series | Bubble 2.0 |
| Item Model Number | POR-375 |
| Connectivity Technology | Bluetooth 5.3 & 2.4 GHz Wireless |
| Operating Range | Up to 10 meters |
| Multi-Device Support | Connects up to 3 devices (1x 2.4 GHz, 2x Bluetooth) |
| Keyboard Description | Tenkeyless, Wireless, Compact, Multi-Device |
| Power Source | Battery Powered (2x AAA, not included) |
| Item Dimensions (LxWxH) | 31.5 x 12.4 x 2.5 cm |
| Item Weight | 375 g |
| Compatible Devices | Laptop, PC, Smartphone, Tablet |
| Operating System Compatibility | Windows, Android, iOS, macOS |
| Included Components | USB Cable |

8. WARRANTY AND SUPPORT

For warranty information and technical support, please refer to the warranty card included with your product or visit the official Portronics website. You may also contact Portronics customer service directly:

- **Manufacturer:** Portronics Digital Pvt Ltd
- **Address:** Unit No. 1082-1090, 10th Floor, Block-B, Vegas, Dwarka, Sec-14, New Delhi-110075
- **Contact Number:** 9555-245-245

9. PRODUCT OVERVIEW VIDEO

Your browser does not support the video tag.

This video provides a quick overview of the Portronics Bubble 2.0 Wireless Keyboard's key features, including its dual connectivity, multi-device pairing, compact design, multimedia keys, and auto power-saving mode.