



BARTH ESB 69-3 House Binding Machine User Manual

[Home](#) » [BARTH](#) » BARTH ESB 69-3 House Binding Machine User Manual 



Fire Fighting Technology
Serving the Fire Service since 1889
ESB 69-3
HOSE BINDING MACHINE




Contents

- [1 MORE SAFETY. MORE COMFORT.](#)
- [2 Accessoires](#)
- [3 WITH KNOW-HOW MADE IN GERMANY](#)
- [4 Technical Specifications](#)
- [5 Documents / Resources](#)

MORE SAFETY. MORE COMFORT.

You should not make any compromise concerning the quality of binding, because your life depends during a firefight on safe and watertight hoses.

Use the BARTH ESB 69-3 for save and high quality wire binding according to actual standards for pressure and suction hoses.

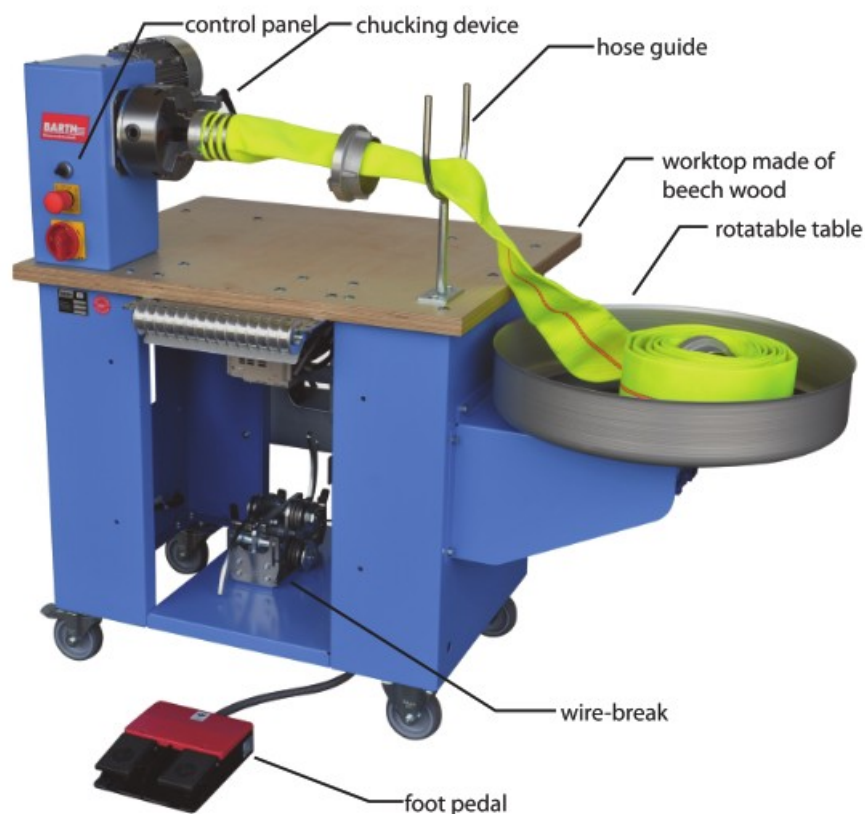


Accessoires

Product Code	Description
1 55581	2 nd wire-spool, for binding with two different wires
8060	Chucking device 1 50, for couplings 1 1 0 to 1 50 mm (4 1 /2 " to 6")
3396	Chucking device 25, for couplings 25 to 38 mm (1 " to 1 1 /2 ")
1 55582	Professional-Set for maximum efficiency (second wire spool, extended wire guide, variable speed control)
1 55587	Binding wire spool, 1 5kg stainless steel; Ø 1 ,4 mm (~ 0.05")
1 55588	Binding wire spool, 1 5kg stainless steel; Ø 1 ,8 mm (~ 0,07")
1 55585	Binding wire spool, 1 5kg zinc-plated; Ø 1 ,4 mm (~ 0.05")
1 55586	Binding wire spool, 1 5kg zinc-plated; Ø 1 ,8 mm (~ 0,07")

Your Benefits

- + high safety standards
- + comfortable & quick
- + user friendly
- + high quality standards

ESB 69-3 with two spool fixtures

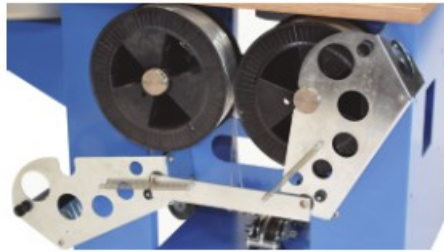

BARTH wire-break for quick reload



WITH KNOW-HOW MADE IN GERMANY

The ESB 69-3 is driven by a gear-motor, the standard chucking device is adjustable for couplings from 38 mm to 110 mm (1 1/2" to 4 1/2"), no matter if you have Storz, BS, DSP, GOST or other couplings.

The BARTH ESB 69-3 with the adjustable wire-break guarantees that the wire is always under tension during the binding process. Another feature is the rotating table which keeps the hose from being twisted while binding. The rotating table is directly synchronized with the rotating of the chucking device.

The BARTH ESB 69-3 is also equipped with a spool holder to store and change the ready-for-use plastic spools with different types of binding wire very fast, easily and safely. The wire tension will be adjusted by the innovative BARTH wire-break to make keep the binding process as comfortable as possible.

Technical Specifications

Product Code	1 55580
Coupling size	38 – 110 mm Ø (1 1/2" to 4 1/2") with standard chuck jaws, extendable and reducible by special chuck jaws
Elec. connection	3N AC 400 V 50 Hz 0,55 kW 1,2 A (opt. 230 V) 5 m cable with 5 pin CEE-plug 16 A
Dimensions	1.500 x 1.380 x 795 mm
Weight	approx. 110 kg

Wilhelm Barth GmbH u. Co. KG
70736 Fellbach, Germany
Steinbeisstrasse 14
Phone +49 (0)71157560-0
za Po ROAR e nese
www.barth-112.com
info@barth-112.com

Documents / Resources



[BARTH ESB 69-3 House Binding Machine](#) [pdf] User Manual

ESB 69-3 House Binding Machine, ESB 69-3, House Binding Machine, Binding Machine, Machine