

basIP AV-04FD SIP Intercom Single Button Panel Instructions

Home » basIP » basIP AV-04FD SIP Intercom Single Button Panel Instructions

AV-04FD SIP Intercom Single Button Panel





EAN: 5060514913529 (SILVER)

BAS-IP AV-04FD — stylish vandal-proof panels with installation by the flush mount method. This individual entrance panel is suitable for installation both in apartments and in the office, factory, gas station, etc.

Contents

- 1 Main features
- 2 Functionality
- 3 Documents /

Resources 4 Related Posts

Main features

• Panel type: Individual.

• Display: No. • Camera: 1/4".

• Angle: 90° horizontal x 60° vertical.

• Resolution: 1 Mp.

• Output video: 720p (1280 × 720), H.264 Main Profile.

• Night backlight: 6 LEDs. • Light sensitivity: 0,01 Lux.

• Protection class: IP65.

• Working temperature: -40 — +65 °C.

• Power consumption: 6,5 W, in standby — 3,6 W.


• Power supply: PoE and +12 V DC.

• Body: Metal. • Colors: Silver.

• Dimensions for installation: $85 \times 180 \times 45$ mm.

• Size of the panel: 95 x 190 x 27 mm.

• Installation: Flush.

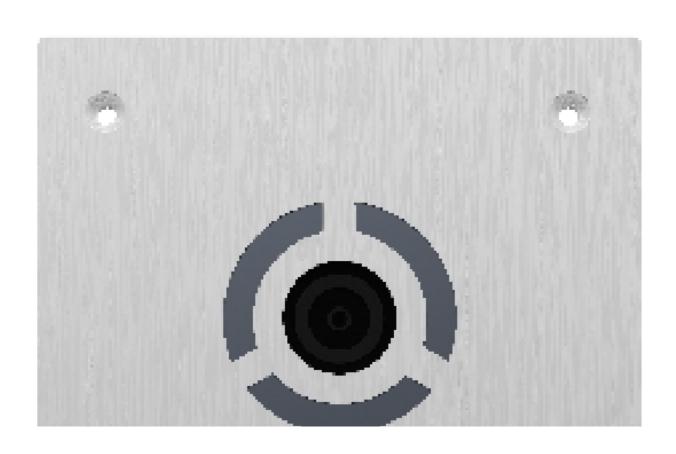



SILVER

• Interface: Multi-language graphical and WEB interface.

- · Lock opening:
 - By means of a monitor
 - From the BAS-IP Intercom application
 - From API
- Shortcut buttons: 1 mechanical call button.
- Authentication: Separate password for settings,

WEB - interface and RTSP stream.

- Talking mode: Full duplex.
- · Additionally:

Software Link support

SIP P2P

Built-in relay

Open API



Documents / Resources



basIP AV-04FD SIP Intercom Single Button Panel [pdf] Instructions

AV-04FD, SIP Intercom Single Button Panel, Single Button Panel, Button Panel, AV-04FD, Out door Panel

Manuals+,