



Bbpos TB200 Toast Direct Attached Instruction Manual

[Home](#) » [bbpos](#) » Bbpos TB200 Toast Direct Attached Instruction Manual 

Contents

- [1 Bbpos TB200 Toast Direct Attached](#)
- [2 NFC Status Indicators](#)
- [3 Cautions & Important Notes](#)
- [4 Product Specifications](#)
- [5 FCC Caution Statement](#)
- [6 Documents / Resources](#)
- [7 Related Posts](#)


Bbpos

Bbpos TB200 Toast Direct Attached



Follow your application instruction to start the transaction process, then swipe, insert or tap card to complete the transaction. If you pay via inserting EMV IC card, please ensure that the EMV chip of the card is facing the right


direction. If you pay using NFC card, please ensure you tap the NFC payment card within 4cm range on top of the NFC marking.

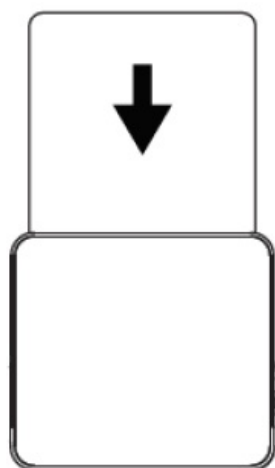

within 4 cm

NFC Status Indicators

First LED ON



Ready for tapping card

LEDs ON in consecutive order




Reading card information

4 LEDs ON + "BEEP"




Card reading process successfully completed

"BEEP"




Transaction completed

First LED flashing



Standby mode

2 "BEEP"s



Error, please retry

Cautions & Important Notes

- Ensure the device is fully charged before use.
- Please ensure EMV chip of the card is facing the right direction when inserting card.
- The NFC card should be tapped within 4 cm range on top of the reader mark.
- Don't drop, disassemble, tear, open, crush, bend, deform, puncture, shred, microwave, incinerate, paint or insert foreign object into the device. Doing any of which will damage the device and void the Warranty.
- Don't immerse the device into water and place near washbasins or any wet locations. Don't spill food or liquid on the devices. Don't attempt to dry the device with external heat sources, such as microwave or hair dryer. Don't use any corrosive solvent or water to clean the device.
- Recommend using dry cloth to clean the surface only.
- Don't use any sharp tools to point the internal components, connectors or contacts, doing which may lead to device malfunction and void the Warranty simultaneously.

Product Specifications

Functions	<ul style="list-style-type: none"> • EMV chip card reader (ISO 7816 compliant class A, B, C card) • NFC Card Reader (EMV contactless, ISO 14443A/B) • Over-the-air firmware update • Over-the-air key update
Charging	Via micro USB
Power & Battery	Lithium polymer rechargeable battery 650mAh, 3.7V
LED Indicator	All LEDs off - button release to power down Red LED on - device starting up / Charging battery Red LED off - fully charged Red LED flashing - low battery / Critical low battery Blue LED on - bluetooth is connected Blue LED flashing - standby mode / waiting for connect bluetooth or bluetooth is disconnected
NFC LED Indicator	Connecting with POS terminal - First LED flashing Ready for NFC Reading – First LED on Success Reading – 4 LEDs on in consecutive order Transaction Completed – One “BEEP” sound Errors – Two “BEEP” sound Power off – All LEDs off
Key Management	DUKPT, MK/SK
Encryption Algorithm	TDES
Support Operating System	Android 2.1 or above iOS 6.0 or above Windows Phone 8 MS Windows
Operating Temperature	0°C – 45°C (32°F – 113°F)
Operating Humidity	Max 95%
Storage Temperature	-20°C – 55°C (-4°F – 131°F)
Storage Humidity	Max 95%

The product shall use the supplied USB cables.



FCC Caution Statement

FCC Supplier's Declaration of Conformity:

BBPOS / TD200 (TD200W, TB200, TB200W, CHB25, CHB26)

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) This device must accept any interference received, including interference that may cause undesired operation.

BBPOS Corp.

970 Reserve Drive, Suite 132 Roseville, CA 95678

www.bbpos.com


Caution:

Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment. This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter. This equipment complies with FCC RF radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with a minimum distance of 20cm between the radiator and any part of your body.

Documents / Resources

	<p>Bbpos TB200 Toast Direct Attached [pdf] Instruction Manual</p> <p>TB200 Toast Direct Attached, Toast Direct Attached, Direct Attached, CHB26</p>
---	---