



BEA MS51W Battery-Powered Touchless Activation with Built-In 900Mhz Transmitter Instruction Manual

[Home](#) » [BEA](#) » BEA MS51W Battery-Powered Touchless Activation with Built-In 900Mhz Transmitter Instruction Manual 

Contents

- 1 BEA MS51W Battery-Powered Touchless Activation with Built-In 900Mhz Transmitter
- 2 Product Information:
- 3 Product Usage Instructions:
- 4 TECHNICAL SPECIFICATIONS
- 5 PRECAUTIONS
- 6 ASSEMBLY DIAGRAM
- 7 PREPARE INSTALLATION SITE
- 8 PREPARE MS51W ASSEMBLY
- 9 INSTALL MS51W ASSEMBLY
- 10 COMPLETE THE INSTALLATION
- 11 TROUBLESHOOTING
- 12 FCC/IC COMPLIANCE
- 13 Documents / Resources



BEA MS51W Battery-Powered Touchless Activation with Built-In 900Mhz Transmitter



Product Information:

Model	MS51W
Activation Type	Battery-powered, touchless activation
Transmitter Frequency	900 MHz
Number of IR Sensors	2
Detection Range	8 inches (20cm) maximum
Battery Life	3 years (at 150 activations per day)
Power Supply	3 VDC (2 AA batteries, each ~1.5 V max.)
Power Consumption	<0.5 mW (when idle), <25 mW (upon RF transmission)
Material	Stainless steel 304 and PC
Weight	Single gang: 0.34 lb, Double gang: 0.55 lb, Round: 0.71 lb, Jamb: 0.29 lb
IP Rating	IP65
FCC Certification	FCC: 2ABWS-10TD900PB IC: 4680A-10TD900PB

Product Usage Instructions:

1. Shut off all power going to the header before attempting any wiring procedures.
2. Observe battery polarity when inserting batteries.
3. Maintain a clean and safe environment when working in public areas.
4. Constantly be aware of pedestrian traffic around the door area.
5. Always stop pedestrian traffic through the doorway when performing tests that may result in unexpected reactions by the door.
6. Before handling any board, ensure you dissipate your body's ESD charge as circuit boards are vulnerable to damage by electrostatic discharge.
7. Always check placement of all wiring before powering up to ensure that moving door parts will not catch any wires and cause damage to equipment.
8. Ensure compliance with all applicable safety standards (i.e. ANSI A156.10 and 156.19) upon completion of

installation.

9. DO NOT attempt any internal repair of the components. All repairs and/or component replacements must be performed by BEA, Inc. Unauthorized disassembly or repair may jeopardize personal safety, expose one to the risk of electrical shock, and adversely affect the safe and reliable performance of the product resulting in a voided warranty.
10. Only trained and qualified personnel are recommended to install and set up the sensor.
11. The door control system and the header cover profile must be correctly grounded.
12. Always test the proper operation of the installation before leaving the premises.
13. The warranty is invalid if unauthorized repairs are made or attempted by unauthorized personnel.
14. Do not use harsh cleaning agents to clean polycarbonate materials. BEA recommends using clean, lukewarm water and a soft, lint-free cloth to clean sensor windows and other polycarbonate surfaces on our products.

Visit website for available languages of this document.



BATTERY-POWERED, TOUCHLESS ACTIVATION WITH BUILT-IN, 900 MHZ TRANSMITTER

TECHNICAL SPECIFICATIONS

TECHNOLOGY / PERFORMANCE	
Technology	Active infrared
number of IR sensors	2
Radio control type	Digital
Frequency	908 – 918 MHz (frequency hopping)
Emitted radio power	-25 dBm (transmitter)
Detection range	8" (20cm) max.
Battery life	3 years (at 150 activations per day)
Product temperature range	-22 – 158 °F (-30 – 70 °C)
ELECTRICAL	
Power supply	3 VDC (2 AA batteries, each ~1.5 V max.)
Power consumption	< 0.5 mW (when idle) < 25 mW (upon RF transmission)
PHYSICAL	
Dimensions (overall)	
single gang	2 ¾" (W) × 4 ½" (H) × 1 ¼" (T)
double gang	4 ½" (W) × 4 ½" (H) × 1 ¼" (T)
round	6" (H/W) × 1 ¼" (T)
jamb	1 ¾" (W) × 4 ½" (H) × 1 ¼" (T)
Material	Stainless steel 304 and PC
Weight	Single gang: 0.34 lb Double gang: 0.55 lb Round: 0.71 lb Jamb: 0.29 lb
COMPLIANCE	
IP rating	IP65
FCC certification	FCC: 2ABWS-10TD900PB IC: 4680A-10TD900PB

Specifications are subject to change without prior notice.
All values measured in specific conditions, using lithium batteries..
For best performance, BEA recommends using lithium batteries.

PRECAUTIONS


CAUTION

- Shut off all power going to header before attempting any wiring procedures.


- Observe battery polarity when inserting batteries.
- Maintain a clean and safe environment when working in public areas.
- Constantly be aware of pedestrian traffic around the door area.
- Always stop pedestrian traffic through the doorway when performing tests that may result in unexpected reactions by the door.
- ESD (electrostatic discharge): Circuit boards are vulnerable to damage by electrostatic discharge. Before handling any board, ensure you dissipate your body's ESD charge.
- Always check placement of all wiring before powering up to ensure that moving door parts will not catch any wires and cause damage to equipment.
- Ensure compliance with all applicable safety standards (i.e. ANSI A156.10 and 156.19) upon completion of installation.
- DO NOT attempt any internal repair of the components. All repairs and/or component replacements must be performed by BEA, Inc. Unauthorized disassembly or repair:
 - May jeopardize personal safety and may expose one to the risk of electrical shock.
 - May adversely affect the safe and reliable performance of the product resulting in a voided warranty.



Only trained and qualified personnel are recommended to install and set up the sensor.



The door control system and the header cover profile must be correctly grounded.



Always test the proper operation of the installation before leaving the premises.




The warranty is invalid if unauthorized repairs are made or attempted by unauthorized personnel.



Do not use harsh cleaning agents to clean polycarbonate materials. Harsh cleaning agents (e.g. ammonia) can cause damage to these materials. BEA recommends using clean, lukewarm water and a soft, lint-free cloth to clean sensor windows and other polycarbonate surfaces on our products.

ASSEMBLY DIAGRAM

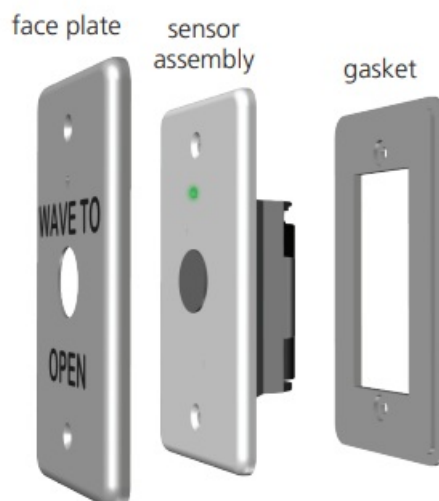

PREPARE INSTALLATION SITE


To ensure system performance, BEA recommends using only plastic electrical boxes.

1. For new installation, install the appropriate mounting box or electrical box.

For retrofitting an existing installation, remove the previous plate and transmitter.






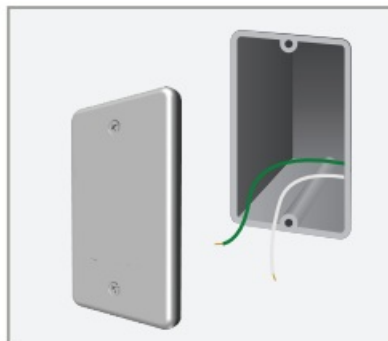



*When installing jamb version, cutout dimensions are
1 1/2" (W) x 2 7/8" (H) x 1" (D min)*

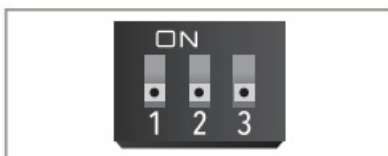

PREPARE MS51W ASSEMBLY


2. Insert 2 AA lithium batteries (provided).
Observe battery polarity when inserting batteries.
3. Make necessary DIP switch adjustments.



DIP	FUNCTION	OFF (default)	ON
1	Detection distance	long range (dependent on DIP 3 setting) DIP 3 ON = 5 – 6" DIP 3 OFF = 7 – 8"	short range (2 – 3")
2	LED indicator <i>(applicable to alkaline battery replacements only)</i>	battery life - multicolor  1x flash = full battery <i>green</i>  1x flash = change batteries <i>orange</i>  1x flash = end of battery life <i>red</i>	battery life - unicolor  1x flash = full battery <i>green</i>  2x flash = change batteries <i>green</i>  3x flash = end of battery life <i>green</i>
3	Immunity	Low immunity	High immunity

INSTALL MS51W ASSEMBLY

- Install MS51W assembly on box. Observe the orientation of the assembly as well as each individual component.

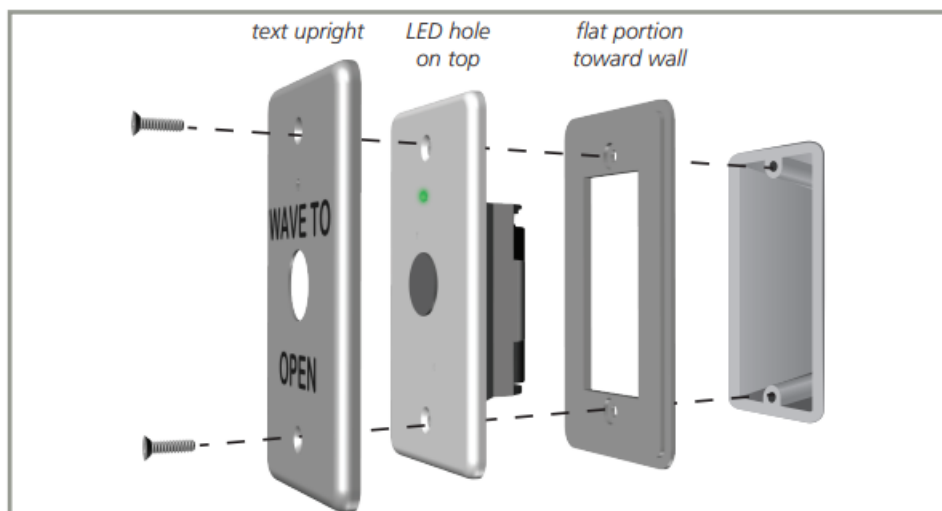

- Secure with the provided screws (#6-32 flathead) and test functionality.



Be sure to remove the plastic film from the face plate before testing.

COMPLETE THE INSTALLATION

- If retrofitting, ensure that the current application is equipped with a 900 MHz receiver. If not (or if new


installation), install a 900 MHz receiver.

7. Pair the transmitter and receiver:

- a. Press and release desired learn button. The red LED on the receiver will illuminate.
- b. Activate the MS51W twice.




The blue LED on the receiver will illuminate.

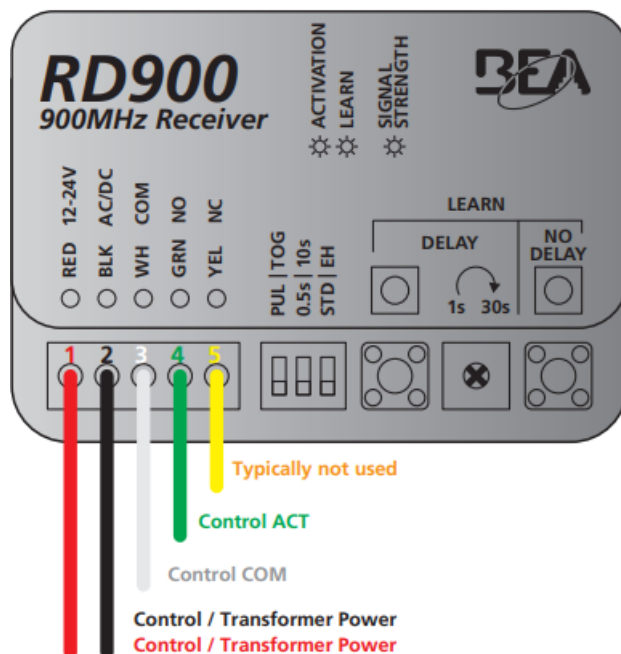See 900 MHz Family User's Guide (75.5937) for more information.



TROUBLESHOOTING

		Dead batteries	Check battery life by placing your hand in front of the MS51W. If there is no LED indication, replace batteries.
		Detection range is too short	Check DIP 1 Position (see page 4) and ensure DIP 3 is in OFF position for indoor applications.
	MS51W does not detect when waving in front of it	Incorrect battery orientation	Ensure batteries are installed properly with the right polarity (see label on product).
		Incorrect MS51W assembly, causing water to leak into the assembly	Ensure all components of the assembly have been placed in the correct orientation (see page 6, step 6). Ensure silicone is applied to the holes in mounting boxes to prevent water intrusion.
		Incorrect receiver wiring/connection	Check wiring and relay connection.
		Improper receiver pairing	Check receiver pairing with transmitter.

	Door does not open when waving hand in front of the MS51W	Incorrect transmitter or receiver frequency	If using wireless transmitters and receivers, ensure that the operating frequencies are the same.
		Door safety system is holding the door closed	Clear the safety system to ensure that nothing is in detection.
		Transmitter interference	Ensure that a plastic junction box is used.
	MS51W stays in detection <ul style="list-style-type: none"> LED will remain solid LED color will depend on the DIP 2 setting 	Window pollution	Check sensor window for any dirt and debris. Wipe sensor window with a non-abrasive, lint-free cloth if necessary.
 	LED flashes orange or red upon activation	Cracked or damaged window	Replace the MS51W.
		Low battery indication	See page 4, step 3. orange = replace soon red = replace immediately
			Increase immunity settings (see page 4, step 3).
			Remove moving or reflective objects in front of the MS51W.
			Ensure that door movement is not causing detection.
			Detection range is too long. Switch to short range (see page 4, step 3).
	MS51W causes door activation without waving hand	Environmental conditions influencing sensor	

FCC/IC COMPLIANCE

- “This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.”
- Changes or modifications not expressly approved by BEA Incorporated could void the user’s authority to operate the equipment.
- Note: This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at his own expense.
- This device complies with Industry Canada licence-exempt RSS standard(s). Operation is subject to the following two conditions: (1) this device may not cause interference, and (2) this device must accept any interference, including interference that may cause undesired operation of the device.

FCC ID: 2ABWS-10TD900TR	IC: 4680A-10TD900TR	Contains model: 10TD900TR
-------------------------	---------------------	---------------------------


BEA, INC. INSTALLATION/SERVICE COMPLIANCE EXPECTATIONS

BEA, Inc., the sensor manufacturer, cannot be held responsible for incorrect installations or incorrect adjustments of the sensor/device; therefore, BEA, Inc. does not guarantee any use of the sensor/device outside of its intended purpose. BEA, Inc. strongly recommends that installation and service technicians be AAADM-certified for pedestrian doors, IDA-certified for doors/gates, and factory-trained for the type of door/gate system. Installers and service personnel are responsible for executing a risk assessment following each installation/service performed, ensuring that the sensor/device system performance is compliant with local, national, and international regulations, codes, and standards. Once installation or service work is complete, a safety inspection of the door/gate shall be performed per the door/gate manufacturer’s recommendations and/or per AAADM/ANSI/DASMA guidelines (where applicable) for best industry practices. Safety inspections must be performed during each service call – examples of these safety inspections can be found on an AAADM safety information label (e.g. ANSI/DASMA 102, ANSI/DASMA 107, UL294, UL325, and International Building Code). Verify that all appropriate industry signage, warning labels, and placards are in place.



Tech Support & Customer Service: 1-800-523-2462
 General Tech Questions: techservices-us@BEAsensors.com | Tech Docs: www.BEAsensors.com

Documents / Resources

	<p>BEA MS51W Battery-Powered Touchless Activation with Built-In 900Mhz Transmitter [pdf] Instruction Manual 75.0068.02, MS51W Battery-Powered Touchless Activation with Built-In 900Mhz Transmitter, B attery-Powered Touchless Activation with Built-In 900Mhz Transmitter, Touchless Activation wit h Built-In 900Mhz Transmitter, Activation with Built-In 900Mhz Transmitter, 900Mhz Transmitter, Transmitter</p>
---	--