

## Manuals+

[Q & A](#) | [Deep Search](#) | [Upload](#)

manuals.plus /

- › [KEEBMONKEY](#) /
- › [WOBKEY Rainy 75 Mechanical Keyboard User Manual](#)

## KEEBMONKEY Pro Blanc

# WOBKEY Rainy 75 Mechanical Keyboard User Manual

Model: Pro Blanc

## 1. INTRODUCTION

The WOBKEY Rainy 75 is a high-performance 75% mechanical keyboard designed for enthusiasts and professionals. It features a sturdy CNC aluminum alloy build, triple-mode connectivity (Wired, Bluetooth 5.0, and 2.4G Wireless), and superior acoustics thanks to its five-layer foam dampening and pre-lubricated HMX/JWK/Cocoa switches. This manual provides essential information for setting up, operating, maintaining, and troubleshooting your keyboard.



Figure 1: WOBKEY Rainy 75 Mechanical Keyboard (Pro - White)

### Key Features:

- Custom Lubricated HMX & JWK Switches for smooth typing.
- Sturdy 6063 Aluminum Alloy Build for durability and premium feel.
- Pleasing Sound Feedback with five-layer foam and 14 dampening buds.
- Triple-Mode Connectivity: Wired (USB-C), BT 5.0, and 2.4G Wireless.
- FR4 Plates with Flex Cuts for enhanced typing experience.
- Double Shot PBT Keycaps for durability and fade resistance.
- VIA/QMK support for advanced customization.



Figure 2: Comprehensive Feature Overview

## 2. SETUP

### 2.1 Package Contents

Before you begin, ensure all items are present in the package:

- WOBKEY Rainy 75 Mechanical Keyboard
- USB Cable (Type-C)
- 2.4GHz Receiver
- 3 Spare Cocoa Switches (for Pro Version)
- Switch Puller
- Keycap Puller



Figure 3: Package Contents

### 2.2 Initial Connection and Power

The Rainy 75 supports three connection modes: Wired, 2.4G Wireless, and Bluetooth. The power switch is discreetly located under the Caps Lock key. Gently remove the Caps Lock keycap using the provided keycap puller to access the switch. Turn the switch to the 'ON' position to power on the keyboard.



Figure 4: Three Modes of Connection

- **Wired Mode:** Connect the keyboard to your computer using the provided USB-C cable. The keyboard will be instantly recognized.
- **2.4G Wireless Mode:** Insert the 2.4GHz receiver into an available USB port on your device. The keyboard should automatically connect.
- **Bluetooth Mode:** Ensure the keyboard is in Bluetooth pairing mode (refer to specific key combinations in the quick start guide for pairing). Search for "Rainy 75" on your device's Bluetooth settings and connect.

The keyboard features a large capacity battery (7000mAh for Pro version) providing extended usage time. It can last up to 900 hours with RGB lighting off.

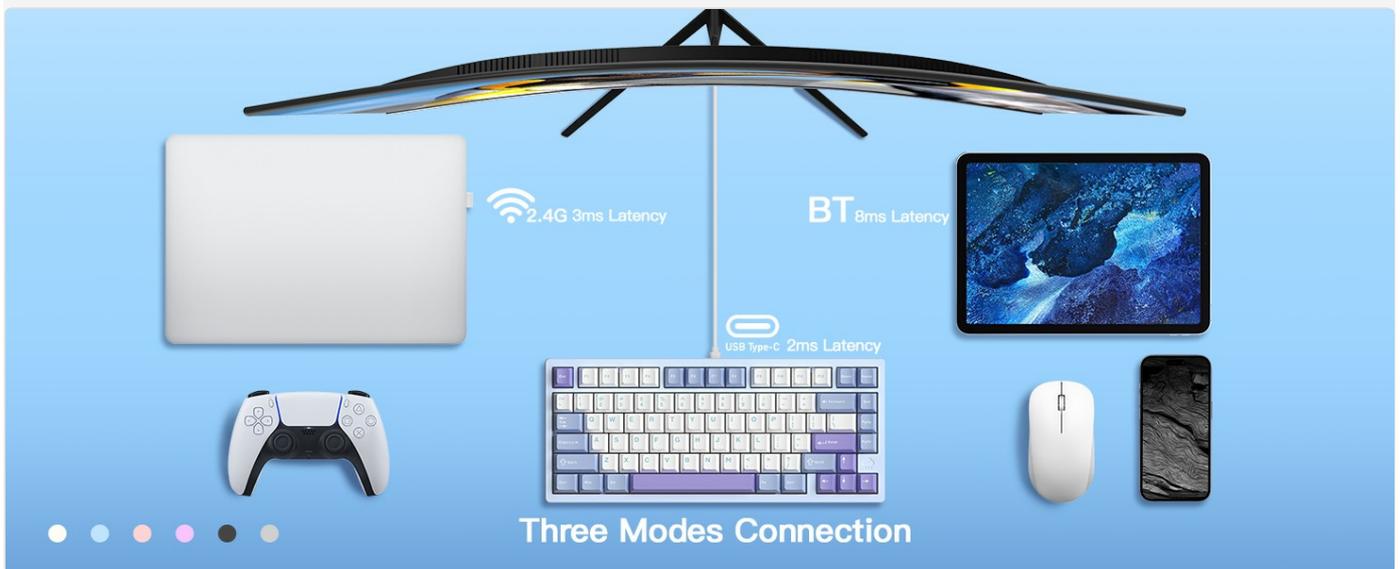


Figure 5: Large Capacity Battery

## 2.3 Initial Setup Video

Your browser does not support the video tag.

Video 1: KEEBMONKEY WOBKEY Rainy 75 Aluminum HMX/JWK Switches Mechanical Keyboard with Superior Acoustics. This video provides a visual guide to the keyboard's features and initial setup, including unboxing and component overview.

## 3. OPERATING YOUR KEYBOARD

### 3.1 Keycap and Switch Replacement

The Rainy 75 features hot-swappable sockets, allowing you to easily change switches without soldering. Use the provided switch puller to carefully remove switches. To replace keycaps, use the keycap puller. Ensure proper alignment when inserting new switches or keycaps to avoid damage.

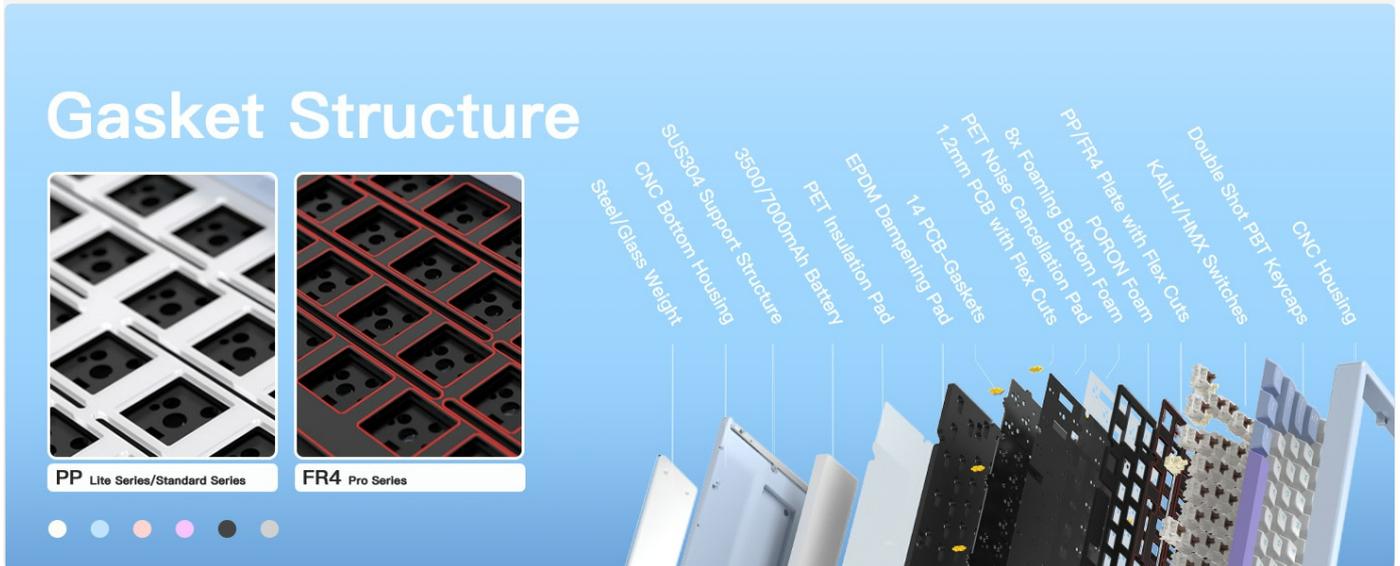


Figure 6: Hot Swappable Keyboard



The keyboard comes with Double Shot PBT Keycaps, known for their durability and resistance to shine and fading.



Figure 7: PBT Keycaps

### 3.2 RGB Lighting Customization

The Rainy 75 features vibrant, customizable RGB lighting with multiple effects. The south-facing RGB LEDs ensure optimal illumination for keycaps. Use the keyboard's function keys or the VIA software to cycle through lighting modes, adjust brightness, and change colors.

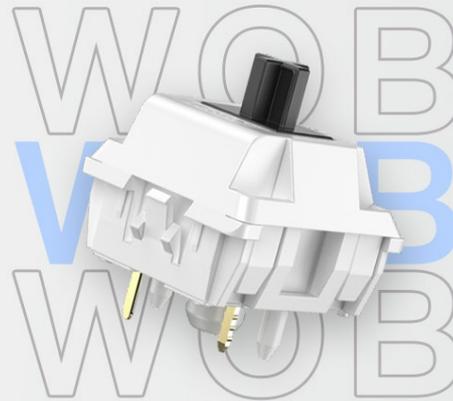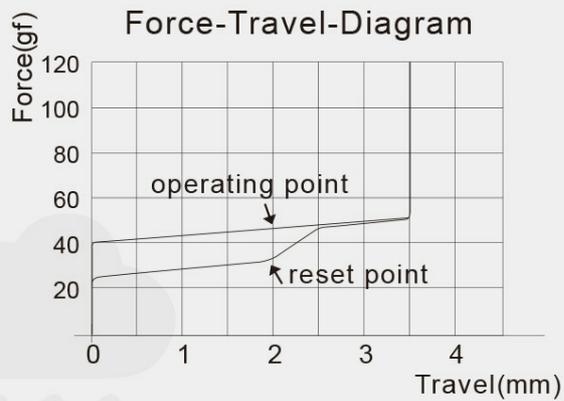

Switch Type:  
Linear

Operating Force:  
40gF(±5g)

Pre-Travel:  
2.0mm(±0.2mm)

Total Travel:  
3.5mm(±0.3mm)


Stem:  
POM

Factory Lubed:  
Yes

Figure 8: Vibrant RGB Lighting

### 3.3 VIA Programmable Functionality

The keyboard supports VIA/QMK firmware, allowing for extensive customization of key assignments, macros, and lighting effects. Download the VIA software from the official WOBKEY website to access these advanced features. This enables you to personalize your typing experience to a high degree.

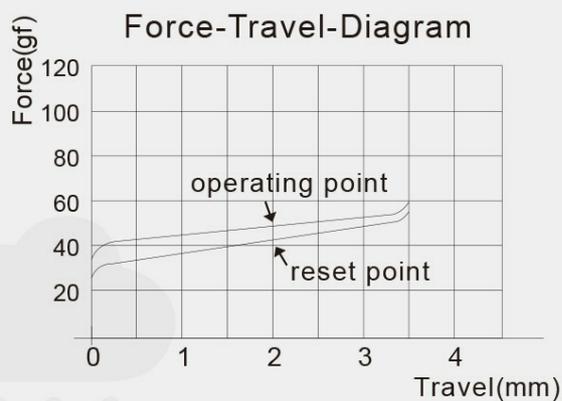

Switch Type:  
Factory Lubed

Operating Force:  
45gF(±5g)

Pre-Travel:  
2.0mm(±0.4mm)

Total Travel:  
3.6mm(±0.5mm)

Stem:  
POM MX Cream

Factory Lubed:  
Yes

Figure 9: VIA Programmable

## 4. MAINTENANCE

### 4.1 Cleaning Your Keyboard

- **General Cleaning:** Use a soft, lint-free cloth slightly dampened with water or a mild cleaning solution to wipe down the keycaps and case. Avoid harsh chemicals.
- **Dust Removal:** Use compressed air to blow away dust and debris from between the keycaps and switches.
- **Deep Cleaning:** For a more thorough clean, carefully remove the keycaps using the provided keycap puller. Clean the exposed switches and plate with a soft brush or compressed air. Wipe down the keycaps with a mild soap and water solution, rinse thoroughly, and ensure they are completely dry before reattaching.

### 4.2 Switch and Keycap Care

- Avoid excessive force when removing or installing switches and keycaps to prevent damage to the stems or sockets.
- Store spare switches and keycaps in a dry, dust-free environment.

## 5. TROUBLESHOOTING

### 5.1 Connectivity Issues

- **Keyboard Not Responding:** Ensure the power switch under the Caps Lock key is in the 'ON' position. Check the battery level.
- **Wired Connection:** Try a different USB-C cable or USB port on your computer.
- **2.4G Wireless Connection:** Ensure the 2.4GHz receiver is securely plugged in. Try a different USB port. Move the keyboard closer to the receiver to rule out interference.
- **Bluetooth Connection:** Ensure Bluetooth is enabled on your device. Re-enter pairing mode on the keyboard and re-pair with your device. Remove previous pairings from your device's Bluetooth settings if issues persist.

### 5.2 RGB Lighting Problems

- **Lights Not On:** Check if RGB lighting is enabled via function keys or VIA software. Ensure the keyboard has sufficient battery charge.
- **Incorrect Colors/Effects:** Reset RGB settings through VIA software or cycle through modes using keyboard shortcuts.

### 5.3 Key Input Issues

- **Key Not Registering:** Carefully remove the keycap and switch. Inspect the switch for any bent pins. Reinsert the switch firmly. If the issue persists, try replacing the switch with one of the spare switches.
- **Incorrect Key Output:** If you have remapped keys using VIA, ensure the correct layout is loaded. Reset to default settings if necessary.

## 6. SPECIFICATIONS

Feature	Detail
Model	Rainy 75 (Pro - White)
Item Model Number	Pro Blanc
Brand	KEEBMONKEY
Layout	75% (81 Keys)
Dimensions	12.6 x 5.12 x 1.57 inches
Item Weight	4.4 pounds
Case Material	6063 CNC Aluminum Alloy
Connectivity	Wired (USB-C), Bluetooth 5.0, 2.4G Wireless
Latency	2ms (Wired), 3ms (2.4G Wireless), 7ms (BT)
Switches	Custom Lubricated HMX/JWK/Cocoa Switches (Hot-swappable)

Feature	Detail
Keycaps	Double Shot PBT Keycaps
Plate Material	FR4 (Pro Series)
Dampening	Five-layer Foam and 14 Dampening Buds
Battery Capacity	7000mAh (Pro Version)
Backlighting	RGB (South-facing)
Compatibility	Laptops, Desktops, Monitors (Windows, macOS, etc.)



Figure 10: 75% Layout and Dimensions




Figure 11: Gasket Structure Components

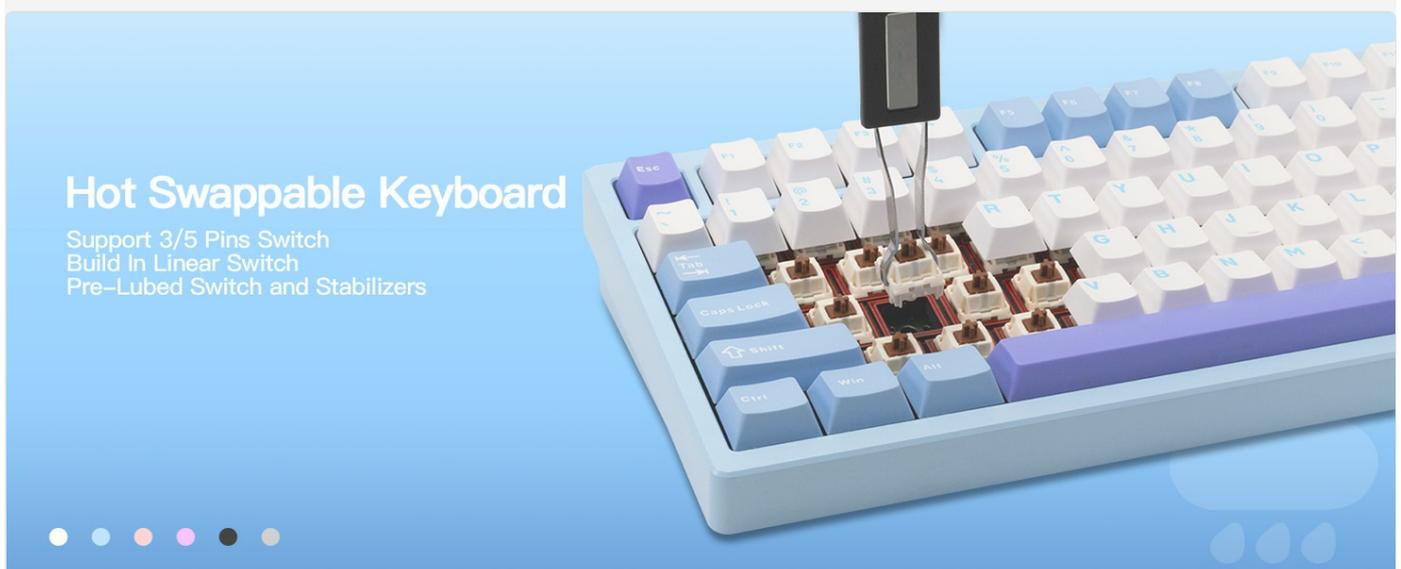


Figure 12: Cocoa Switch Force-Travel Diagram

Feature\Version	Lite Version	Standard Version	Pro Version
RGB	No	Yes	Yes
Switch	HMX Violet Switch	HMX Violet Switch	Kailh Cocoa Switch
Battery	3500mAh	3500mAh	7000mAh
Weight	Mirrored Glass Gradient Glass	Mirrored Glass Gradient Glass	Silver SUS304
Plate	PP	PP	FR4
Price	\$129	\$139	\$159

Figure 13: Violet Switch Force-Travel Diagram

## Package Contents:

**Lite /Standard Version**



Keyboard, Manual, 2.4GHz Receiver, 3 Spare Violet Switches, Switch Puller, Type-c Cable.

**Pro Version**



Keyboard, Manual, 2.4GHz Receiver, 3 Spare Cocoa Switches, Switch Puller, Type-c Cable.

Figure 14: WOB Switch Force-Travel Diagram



### Vibrant RGB Lighting

Dynamic, customizable RGB lighting with multiple effects enhances your setup, delivering an immersive and visually stunning experience.



South Facing RGB

Figure 15: Feature Comparison Across Rainy 75 Versions

## 7. WARRANTY AND SUPPORT

KEEBMONKEY products are manufactured to high standards and undergo rigorous quality checks. For specific warranty details and support, please refer to the warranty information provided with your purchase or visit the official KEEBMONKEY website. For technical assistance or inquiries, please contact KEEBMONKEY customer support. KEEBMONKEY is a registered company founded in 2019, dedicated to designing, manufacturing, and distributing keyboard-related products.