BEGA 71330A For Revealing Performance



e

BEGA 71330A For Revealing Performance Instruction Manual

Home » BEGA 71330A For Revealing Performance Instruction Manual



Contents


- 1 BEGA 71330A For Revealing
- **Performance**
- 2 Instructions for use
- **3 Product Description**
- 4 Safety
- **5 Installation**
- 6 Documents / Resources
 - **6.1 References**
- 7 Related Posts



BEGA 71330A For Revealing Performance



Instructions for use

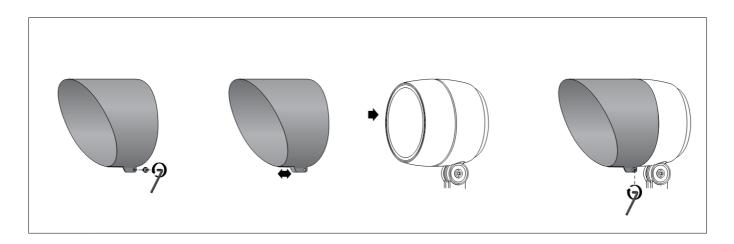

Application

- The shield can be installed at 360° and prevents lateral glare from one direction up to 45°.
- suitable for BEGA performance floodlights
- 85 124 · 85 130 · 85 136 · 85 171

Product Description

- Surround made of stainless steel
- Steel grade no. 1.4301
- Color graphite or silver
- c Conformity mark
- Weight: 0.1 kg

Safety

The manufacturer accepts no liability for damage caused by improper use or installation. If subsequent modifications are made to the luminaire, the person responsible for these modifications shall be considered the manufacturer.

Installation

Undo the hexagon socket screw (wrench size 3mm) and insert the shield into the groove in the floodlight housing. Align the shield and secure it in place.

BEGA Gantenbrink-Leuchten KG · Postfach 3160 · 58689 Menden · <u>info@bega.com</u> · <u>www.bega.com</u>

Documents / Resources



BEGA 71330A For Revealing Performance [pdf] Instruction Manual

71330A For Revealing Performance, 71330A, For Revealing Performance, Revealing Performance, Performance

References

- BEGA · Das qute Licht.
- User Manual

Manuals+, Privacy Policy

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.