Saved from manuals.plus.
Open the live page for links to other documents and user manuals.

AMOROM Home Security Cameras-P1

AMOROM Indoor Security Camera User Manual

Brand: AMOROM | Model: Home Security Cameras-P1

1. Introduction

Thank you for choosing the AMOROM Indoor Security Camera. This device is designed to provide comprehensive home monitoring with advanced features such as 3600 pan and tilt, clear night vision, intelligent motion detection, and two-way audio communication. This manual will guide you through the setup, operation, and maintenance of your new security camera to ensure optimal performance and peace of mind.



Image: The AMOROM Indoor Security Camera shown alongside a smartphone displaying its live video feed, illustrating its primary function as a home monitoring device.

2. What's in the Box

- Indoor Camera × 1
- Power Adapter × 1
- Type-C Charging Cable × 1
- Screw Bags × 1
- Camera Mount × 1
- User Manual × 1

3. Setup Guide

3.1 App Download

To begin, download the **AMOROM app** from your smartphone's app store (available for iOS and Android). Search for "AMOROM" and install the application.



Image: A visual representation of the AMOROM app interface on a smartphone, highlighting its accessibility from anywhere.

3.2 Powering On

1. Connect the Type-C charging cable to the camera's power port.
2. Plug the power adapter into a standard electrical outlet.
3. The camera will power on, and its indicator light will begin to flash, indicating it's ready for setup.

3.3 Connecting to Wi-Fi

1. Open the AMOROM app and create an account or log in.
2. Tap the "+" icon to add a new device.
3. Follow the on-screen instructions to select your camera model and connect it to your 2.4GHz Wi-Fi network. Ensure your Wi-Fi password is correct.
4. The app will guide you through scanning a QR code with the camera's lens or other pairing methods.
5. Once connected, the camera's indicator light will turn solid, and you will see the live feed in the app.

4. Operating Instructions

4.1 360° Coverage (Pan & Tilt)

The AMOROM camera features 360° horizontal pan and 130° vertical tilt capabilities, allowing you to monitor your entire room. Use the directional controls within the AMOROM app to remotely adjust the camera's viewing angle.



Image: The camera demonstrating its 360° pan and 130° tilt functionality, ensuring comprehensive room coverage.



Image: A wide-angle view illustrating the camera's ability to capture a full 360° view of an indoor space.

4.2 AI Motion Detection & Instant Alerts

The camera utilizes advanced AI to detect motion and send instant alerts to your smartphone. You can customize motion detection zones and sensitivity settings within the app to reduce false alarms.



Image: A smartphone screen showing a notification for detected motion, indicating the camera's alert system.



Image: A smartphone displaying a motion detection alert, showing the camera's ability to detect movement within its field of view.

4.3 2-Way Audio

Communicate with family members or pets through the camera's built-in microphone and speaker. Simply tap the microphone icon in the live view interface of the app to speak.



Image: The camera facilitating two-way audio communication between a user and a child with a dog.



Image: A scene depicting the two-way audio function, allowing interaction with a baby through the camera.

4.4 Night Vision

The integrated infrared system provides clear black-and-white video up to 30 feet in low-light or no-light conditions, ensuring continuous monitoring around the clock.



Image: A smartphone screen showing the camera's night vision capability, capturing a clear image in darkness.



Image: A woman viewing the camera's super clear night vision feed on her smartphone, demonstrating its effectiveness in low light.

4.5 Privacy Mode

Activate Privacy Mode in the AMOROM app to automatically turn off the camera and point its lens downward, ensuring your privacy when needed without unplugging the device.



Image: The camera entering privacy mode, with its lens physically rotating downwards to ensure privacy.

4.6 Storage Options

Recordings can be stored locally on a MicroSD card (up to 128GB, sold separately) or securely in the cloud via the AMOROM app. All cloud videos are encrypted and protected with AWS Cloud.



Image: The camera highlighting its MicroSD card slot for local storage and the option for cloud storage.

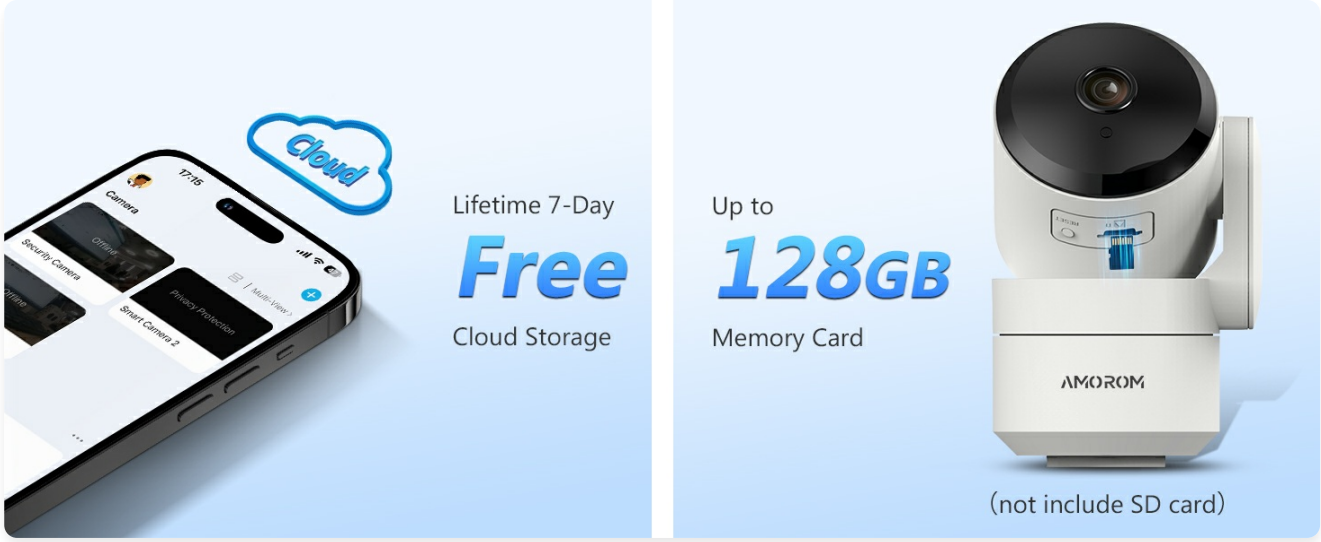


Image: A visual explanation of the camera's two storage options: free 7-day cloud storage and MicroSD card support up to 128GB.

4.7 Voice Control (Alexa/Google Assistant)

Integrate your AMOROM camera with Amazon Alexa or Google Assistant for convenient voice control. Use simple commands to view your live feed on compatible smart displays.



Image: A woman interacting with Alexa to display the camera's live feed on a smart home device.

Image: A user issuing a voice command to Alexa to view the baby's room, demonstrating seamless integration with smart assistants.

4.8 Multi-User Access & Multiple Views

Share access to your camera's live feed with unlimited users through the AMOROM app. You can also add multiple cameras and view up to 16 live feeds simultaneously on one screen.



Image: An illustration of multiple users accessing the camera feed from various devices, highlighting the multi-user sharing feature.



Image: A smartphone screen displaying up to 16 simultaneous live views from multiple cameras, demonstrating the extensive monitoring capability.

4.9 AI Fire Detection

The camera features advanced AI algorithms that can immediately recognize flames and ensure timely alarms, providing 24/7 support to protect your safety and property.



Image: The camera detecting a fire, with a corresponding alert displayed on a smartphone, showcasing its AI fire detection feature.

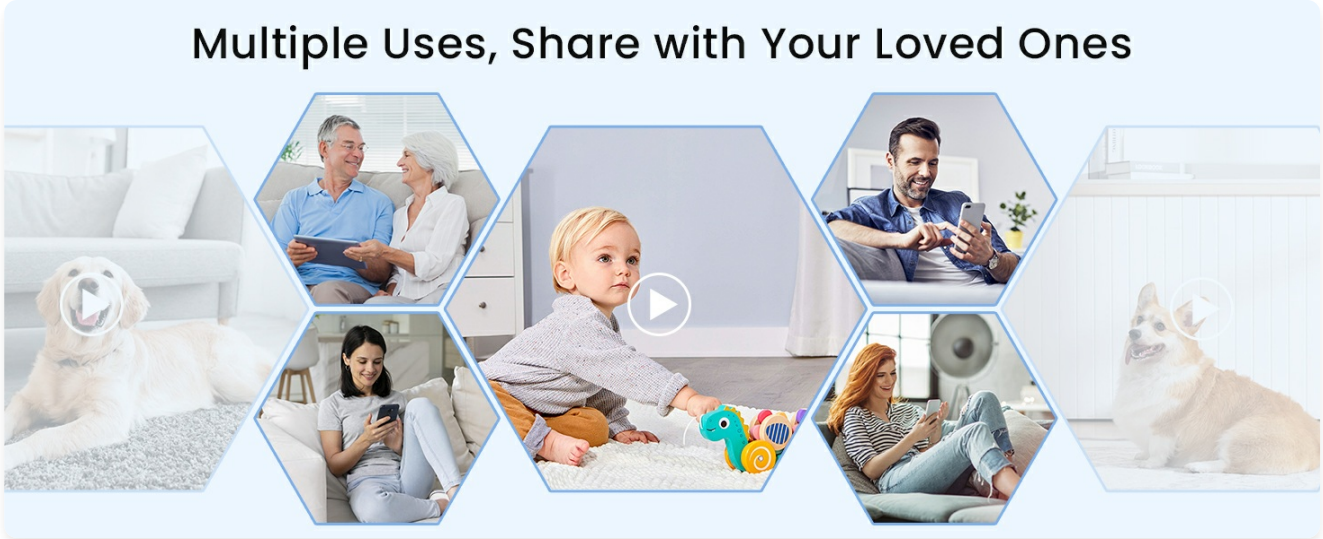


Image: A visual representation of the camera's advanced AI fire detection system, showing an alert on a smartphone during a simulated fire scenario.

5. Maintenance

To ensure the longevity and optimal performance of your AMOROM Indoor Security Camera, follow these maintenance guidelines:

- **Cleaning:** Gently wipe the camera lens and body with a soft, dry, lint-free cloth. Do not use harsh chemicals, cleaning solvents, or abrasive cleaners.
- **Placement:** Avoid placing the camera in direct sunlight or near heat sources, as this can affect its performance and lifespan. Ensure it is placed on a stable surface or securely mounted.
- **Software Updates:** Regularly check the AMOROM app for firmware updates. Keeping your camera's software up-to-date ensures you have the latest features and security enhancements.
- **Power Supply:** Use only the provided power adapter and cable to prevent damage to the camera.

6. Troubleshooting

If you encounter issues with your AMOROM Indoor Security Camera, please refer to the following common problems and solutions:

Problem	Possible Solution
Camera won't connect to Wi-Fi	Ensure your Wi-Fi network is 2.4GHz. Check your Wi-Fi password for accuracy. Move the camera closer to your router. Restart both the camera and your router.
Live feed is blurry or pixelated	Check your internet connection speed. Ensure the camera lens is clean. Adjust the video quality settings in the app to a lower resolution if your network is slow.
Motion detection alerts are too frequent/infrequent	Adjust the motion detection sensitivity settings in the app. Define specific motion detection zones to exclude high-traffic areas.
Two-way audio is not working	Ensure your phone's microphone is enabled for the AMOROM app. Check the volume settings on both your phone and within the app. Ensure the camera's microphone and speaker are not obstructed.
Camera is offline	Check if the camera is powered on. Verify your Wi-Fi network is active and stable. Restart the camera by unplugging and re-plugging it.

7. Specifications

Feature	Detail
Model Name	indoor camera

Feature	Detail
Item Model Number	Home Security Cameras-P1
Indoor/Outdoor Usage	Indoor
Connectivity Protocol	Wi-Fi (2.4GHz)
Video Capture Resolution	1080p
Viewing Angle	360 Degrees
Night Vision Range	30 Feet
Controller Type	Google Assistant, Amazon Alexa
Storage	MicroSD Card (up to 128GB), Cloud Storage
Dimensions (L x W x H)	6 x 4 x 5 inches
Item Weight	10.5 ounces
Power Source	Corded Electric
Special Features	Local Recording, 2-Way Audio, Night Vision, PTZ Technology, Motion Sensor

8. Official Product Video

Your browser does not support the video tag.

Video: An official product video from AMOROM showcasing the key features and benefits of the Indoor Security Camera, including its 3600 monitoring, smart tracking, and ease of use.

9. Warranty and Support

AMOROM is committed to providing high-quality products and excellent customer service. While specific warranty details are not provided in this manual, AMOROM offers 24/7 customer support to assist you with any questions or issues you may encounter.

For assistance, please refer to the contact information provided with your product packaging or visit the official AMOROM website.



Image: A customer support representative, symbolizing the 24/7 customer service available for AMOROM products.

© 2024 AMOROM. All rights reserved.

Ask a question about this manual

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page's manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. Privacy details.

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question

Open the live page

https://manuals.plus/asin/B0CSD9786T

More documents and user manuals: **https://manuals.plus/**