

Manuals+

[Q & A](#) | [Deep Search](#) | [Upload](#)

[manuals.plus](#) /

› [JAYEGT](#) /

› [JAYEGT Motorized Rotating Display Stand 20.5-inch \(JY-52cm-W\) User Manual](#)

JAYEGT JY-52cm-W

JAYEGT Motorized Rotating Display Stand (JY-52cm-W) User Manual

Model: JY-52cm-W | Diameter: 20.5 inches | Max Load: 350 lbs

1. INTRODUCTION

This manual provides detailed instructions for the safe and effective use of your JAYEGT Motorized Rotating Display Stand. Designed for displaying various products, this turntable features a robust motor, remote control functionality, and a high load capacity, making it suitable for photography, live shows, and product exhibitions.

2. PACKAGE CONTENTS

Please verify that all items are present in your package:

- 1 x JAYEGT Motorized Rotating Display Stand (20.5-inch, White)
- 1 x Power Adapter (100~240 V to DC 15V)
- 1 x Remote Control
- 1 x User Manual (this document)
- 5 x Background Boards (various colors)



Figure 2.1: Contents of the JAYEGT Motorized Rotating Display Stand package, including the stand, remote, and background boards.

3. PRODUCT FEATURES

- **High Load Capacity:** Supports up to 350 lbs (158 kg), suitable for large and heavy items.
- **Remote Control:** Adjust angle, speed, and direction wirelessly.
- **Multiple Rotation Modes:** 360-degree continuous rotation, clockwise/counter-clockwise, and intermittent rotation with 45°, 90°, or 180° angle circulation modes.
- **Adjustable Speed:** Rotation speed ranges from 50 to 110 seconds per cycle (5 gears).
- **Quiet Operation:** Smooth motor with noise levels typically below 50dB.
- **Stable Design:** Features anti-shake and non-slip base for secure operation.

4. SETUP INSTRUCTIONS

1. **Unpack:** Carefully remove all components from the packaging.

2. **Placement:** Place the rotating display stand on a stable, flat, and level surface. Ensure there is adequate space around the stand for the items you intend to display.
3. **Power Connection:** Connect the provided power adapter to the stand's power input port. Plug the adapter into a standard electrical outlet (100-240V).
4. **Power On:** Locate the power switch on the side of the stand and turn it to the 'ON' position. A power indicator light will illuminate.
5. **Remote Control:** Ensure the remote control has batteries installed. The remote is ready for use once the stand is powered on.

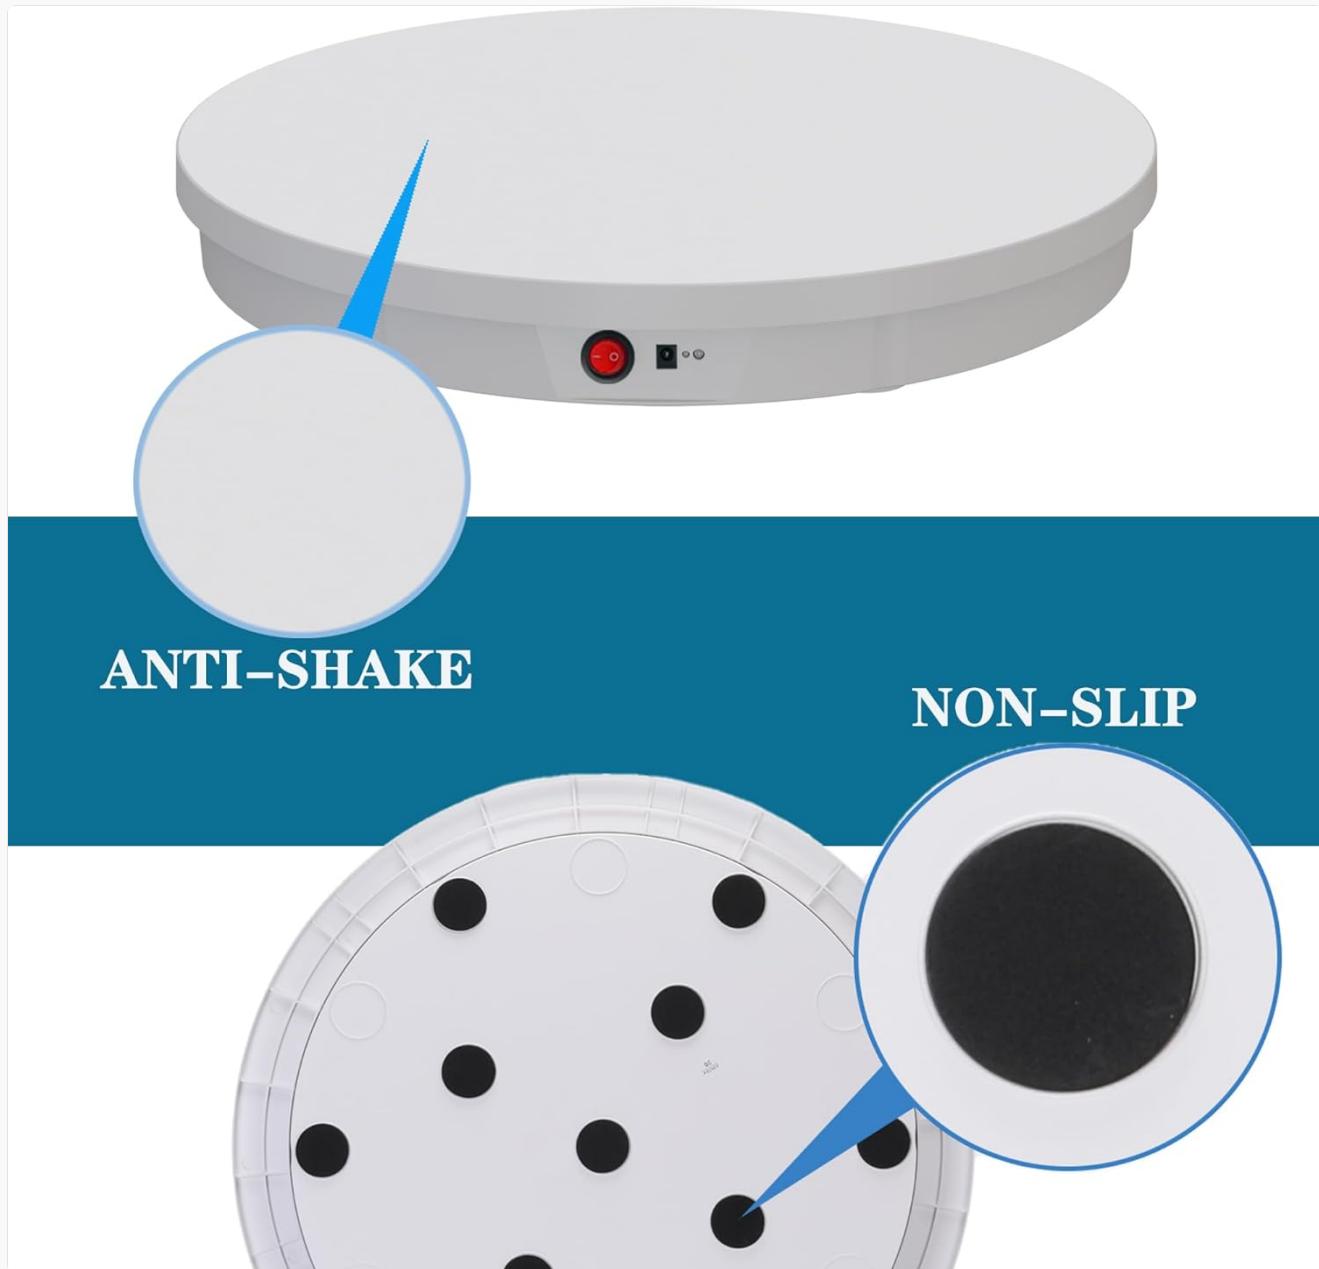


Figure 4.1: The stand's non-slip base and anti-shake design ensure stability during operation.

5. OPERATING INSTRUCTIONS

The JAYEGT Motorized Rotating Display Stand is operated primarily using the included remote control. Familiarize yourself with the remote's buttons for optimal use.

5.1 Basic Operation

- **Power Button:** Use the power switch on the stand to turn the unit on or off.

- **Start/Stop:** Press the **Play/Pause** button on the remote to start or stop rotation.
- **Direction Control:** Use the **Clockwise** or **Counter-clockwise** buttons to change the rotation direction.
- **Speed Adjustment:** Use the **Speed Up** and **Speed Down** buttons to cycle through the 5 available rotation speeds.

CLOCKWISE & COUNTERCLOCKWISE



CONTINUOUS & INTERMITTENT



CONTINUOUS & INTERMITTENT

NOTE:

1. When you press the **45°**, the turntable will always rotate back and forth within a 45° range.
2. Press the left or right key again, and it will resume full circle continuous rotation **90°**.

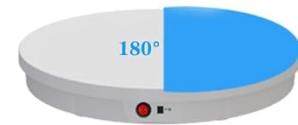
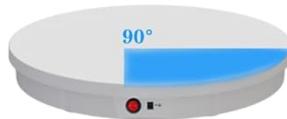
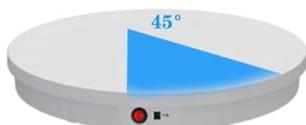


Figure 5.1: Remote control functions for direction and rotation modes.

5.2 Advanced Rotation Modes

- **Continuous Rotation:** The default mode, where the stand rotates continuously in the selected direction.
- **Intermittent Rotation:** Press the **Intermittent** button to activate this mode. The stand will rotate for a set duration, pause, and then resume.
- **Angle Circulation Modes:**
 - Press the **45°** button: The turntable will rotate back and forth within a 45-degree range.
 - Press the **90°** button: The turntable will rotate back and forth within a 90-degree range.
 - Press the **180°** button: The turntable will rotate back and forth within a 180-degree range.
 - To resume full circle continuous rotation, press the left or right key again after selecting an angle mode.
- **Position Memory:** The stand can remember specific positions for precise photography. Refer to the remote control's specific buttons for setting and recalling positions.



Figure 5.2: Adjusting rotation speed and capturing product shots.

6. MAINTENANCE

- **Cleaning:** Wipe the surface of the stand with a soft, dry, or slightly damp cloth. Do not use abrasive cleaners or solvents.
- **Storage:** When not in use, store the stand in a cool, dry place away from direct sunlight and extreme temperatures.
- **Power Disconnection:** Always unplug the power adapter from the wall outlet when the stand is not in use for extended periods.
- **Remote Control Batteries:** Replace batteries in the remote control as needed to ensure proper functionality.

7. TROUBLESHOOTING

Problem	Possible Cause	Solution

Problem	Possible Cause	Solution
Stand does not power on.	Power adapter not connected, power switch off, or power outlet issue.	Ensure power adapter is securely connected and plugged into a working outlet. Verify the power switch on the stand is in the 'ON' position.
Stand does not rotate.	Not powered on, remote control batteries low, remote not aimed correctly, or item too heavy.	Check power connection. Replace remote batteries. Aim remote directly at the stand's sensor. Ensure the displayed item's weight does not exceed 350 lbs (158 kg). Distribute weight evenly.
Rotation is jerky or noisy.	Overload, uneven weight distribution, or stand not on a flat surface.	Reduce load if it exceeds 350 lbs. Redistribute the item's weight evenly on the stand. Place the stand on a completely flat and stable surface.
Remote control unresponsive.	Low batteries, obstruction, or out of range.	Replace remote control batteries. Ensure no obstructions between the remote and the stand's sensor. Operate within a reasonable range.

8. SPECIFICATIONS

Feature	Detail
Model Number	JY-52cm-W
Diameter	20.5 inches (52 cm)
Maximum Load Capacity	350 lbs (158 kg)
Rotation Speed	50-110 seconds per cycle (5 adjustable gears)
Material	Acrylonitrile Butadiene Styrene (ABS)
Color	White
Item Weight	6 pounds (2.7 kg)
Power Input	AC 100-240V, DC 15V Adapter
Noise Level	≤50dB (typically 20-30dB)

Size:52cm/20.5inch

Load bearing: 350bs

Rotating speed:50-110s/r

PRODUCT PARAMETERS



Figure 8.1: Key product parameters of the display stand.

Slient Design

20db 30db 40db 50db 60db 70db 80db

High quality movement makes the product more quite





Figure 8.2: Illustration of the stand's quiet operation, typically 20-30dB.

9. WARRANTY AND SUPPORT

JAYEGT products are manufactured with quality and performance in mind. For warranty information or technical support, please refer to the contact details provided with your purchase documentation or visit the official JAYEGT website. Keep your purchase receipt as proof of purchase.

For further assistance, you may contact JAYEGT customer service through their Amazon store page: [Visit the JAYEGT Store on Amazon](#).

	<p>JAYEGT Rotating Display Stand - Model Information</p> <p>Details on the JAYEGT Rotating Display Stand, including model numbers and FCC ID, from Shenzhen Kayak Technology Co.,Ltd.</p>
	<p>VILTOX JY-710 FSK 2.4GHz Timer Remote Control Wireless Digital User Manual</p> <p>Comprehensive user manual for the VILTOX JY-710 FSK 2.4GHz Timer Remote Control Wireless Digital. Learn about its features, components, safety precautions, operation for timed and manual photography, and technical specifications.</p>
<p>INSTALLATION Product Manual</p> <p>Version: S10016US-00-25A-AA</p>	<p>Red Barrel Studio 50.4" Lifting TV Stand Installation Manual</p> <p>Comprehensive installation manual for the Red Barrel Studio 50.4" Lifting TV Stand With Motorized Vertical Stand Lift, detailing assembly steps, hardware, and safety warnings.</p>
	<p>Wake-Up Light User Manual - JY-001 Features and Operation</p> <p>User manual for the Dongguan Jiu Yuan Technology Co., Ltd. Wake-Up Light (Model JY-001). Provides detailed instructions on product functions, setting the clock, alarms, fall asleep timer, FM radio, Bluetooth, cleaning, and FCC compliance.</p>
	<p>Robolinho Robotic Lawnmower Operating Manual</p> <p>Comprehensive operating manual for the AL-KO Robolinho series of robotic lawnmowers, covering models 350W, 550W, 1300W, 520W, 822W, 1423W, and 2323W. Includes setup, operation, safety, and maintenance instructions.</p>
	<p>Instructions for Remote Car</p> <p>This document provides instructions for operating a remote-controlled car, including setup, pairing, battery installation, charging, and basic controls for forward, backward, left, and right movement. It also includes FCC compliance information.</p>