

Runleader RL-HM202A-BK

Runleader Digital 9999 Days Events Timer

MODEL: RL-HM202A-BK

1. Introduction

The Runleader Digital 9999 Days Events Timer is a versatile device designed to help you track important events with precision. It functions as both a countdown timer for future events and a count-up stopwatch for elapsed time, offering a wide range of applications from personal milestones to professional tasks. Its compact design and multiple placement options make it a convenient tool for any setting.



2. Product Features

- **Digital Events Timer:** Tracks future events by countdown from 0 to 9999 days, 23 hours, 59 minutes. Current and target date/time range: 01/01/18 0:00 to 12/31/99.
- **Count-Up Tracking:** Automatically begins count-up tracking once the countdown ends, functioning as a stopwatch to record event duration (e.g., gym, sport, examination).
- **Countdown ON/OFF:** Allows pausing and resuming countdown tracking with a simple button press.
- **2 Placement Methods:** Can be placed on any flat surface or attached to iron surfaces (like refrigerators) using built-in back magnets.
- **Power:** Built-in replaceable CR2032*2 batteries.

3. Setup

3.1. Battery Installation

The timer comes with two CR2032 lithium metal batteries included. To install or replace batteries:

1. Locate the battery cover on the back of the device.
2. Open the battery cover.
3. Insert two CR2032 batteries, ensuring correct polarity.
4. Close the battery cover securely.

3.2. Placement Methods

The timer offers flexible placement options:

- **Desktop Placement:** Use the integrated stand to place the timer on any flat surface.
- **Magnetic Attachment:** The timer features back magnets, allowing it to be securely attached to metallic surfaces such as refrigerators or microwaves.

2 PLACEMENT METHODS

Back magnets placement



Desktop placement

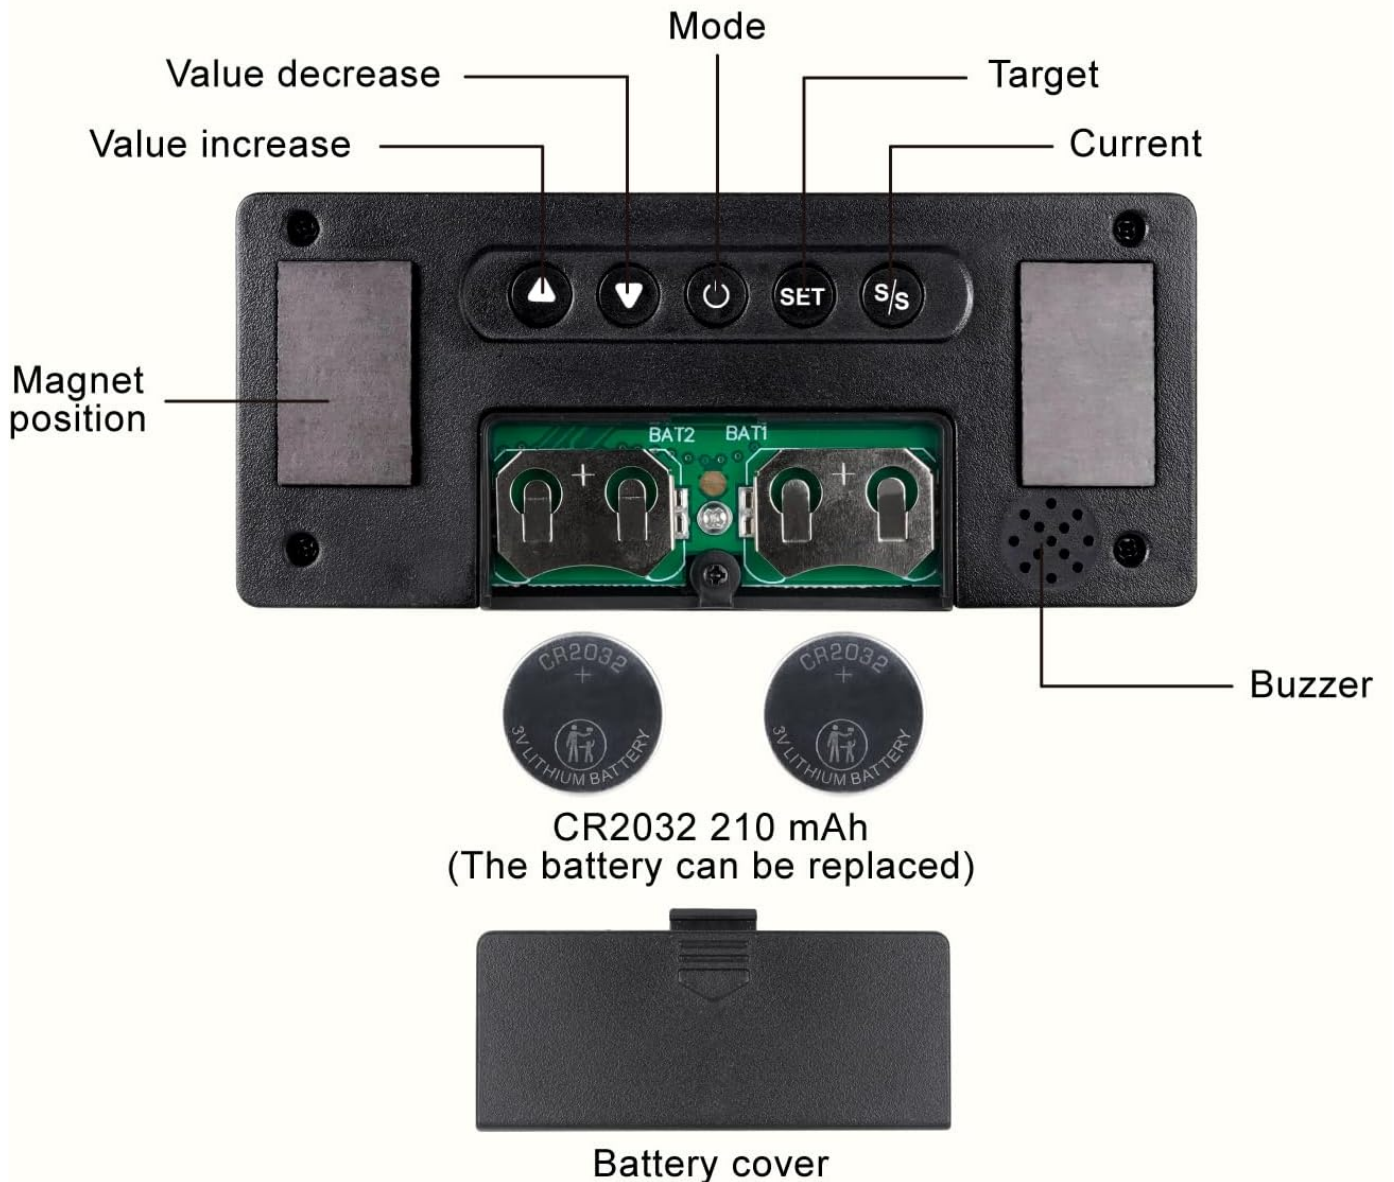


Image: The timer displayed on a desktop and attached to a refrigerator, illustrating its two placement methods.

3.3. Button Functions

Familiarize yourself with the buttons on the back of the timer:

BUTTONS & BATTERY



▲ :Value increase

▼ :Value decrease

⏻ :Power on/off

SET :Set the countdown tracking

S/S :Countdown pause/wake up

Image: Detailed view of the timer's back panel, highlighting button functions and battery compartment.

- ▲ (**Value Increase**): Increases the selected value during setting.
- ▼ (**Value Decrease**): Decreases the selected value during setting.
- **SET**: Used to enter setting mode and toggle between digits (days, hours, minutes, seconds).
- **S/S (Start/Stop)**: Starts or pauses the countdown/count-up timer.
- ⏻ (**Power ON/OFF**): Turns the device on or off.

4. Operating Instructions

4.1. Setting the Countdown Timer

To set a specific date and time for your event countdown:

1. Press and hold the **SET** button for 5 seconds to enter setting mode. The digits will start flashing.
2. Use the ▲ and ▼ buttons to adjust the flashing digit (days, hours, minutes, seconds).
3. Press **SET** again to move to the next digit.
4. Repeat steps 2 and 3 until all desired values are set.
5. Once the countdown target is set, press the **S/S** button to start the countdown.

Your browser does not support the video tag.

Video: Demonstrates how to set the day countdown timer, including adjusting days, hours, minutes, and seconds.



Image: Visual representation of the countdown tracking feature, showing the timer approaching zero.

4.2. Using the Count-Up Tracking

After the countdown reaches zero, the timer automatically switches to count-up mode, acting as a stopwatch to measure the duration of an event.




Image: The timer demonstrating the transition from countdown to count-up mode, useful for tracking event duration.

4.3. Pause and Wake Up Function

You can pause the countdown at any time and resume it when needed:

- To pause the countdown, press the **S/S** button. The display will stop counting.
- To resume, press the **S/S** button again. The countdown will continue from where it left off.

COUNTDOWN PAUSE/WAKE UP

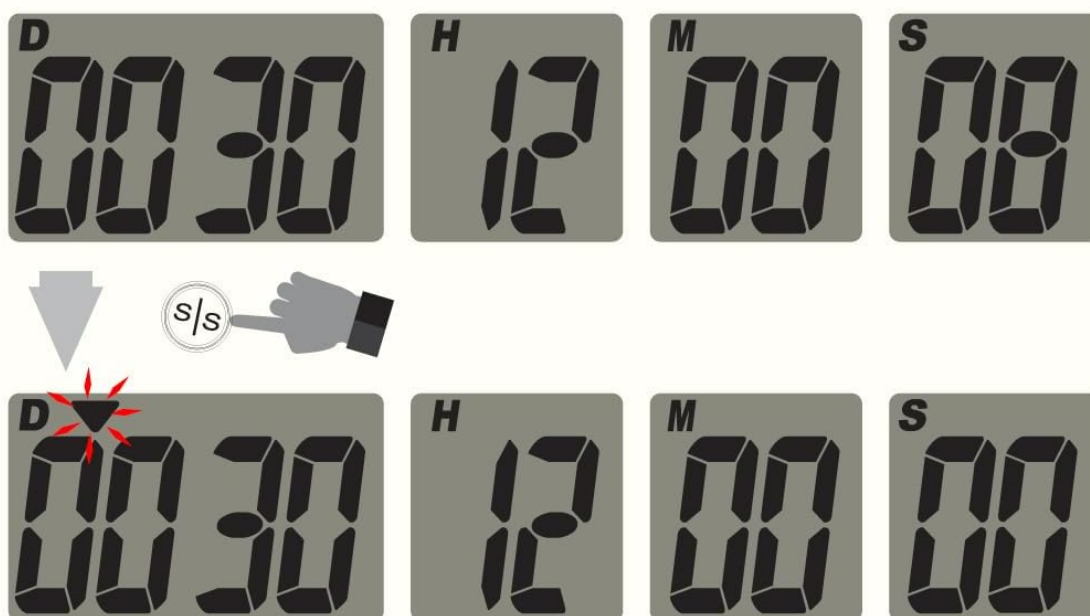

- You can pause or wake up the countdown tracking by "S/S" button.

Image: Visual guide on how to pause and wake up the countdown tracking using the S/S button.

4.4. User Shutdown

To turn off the timer and conserve battery life:

- Press and hold the  (**Power ON/OFF**) button until the display turns off.

USER SHUTDOWN

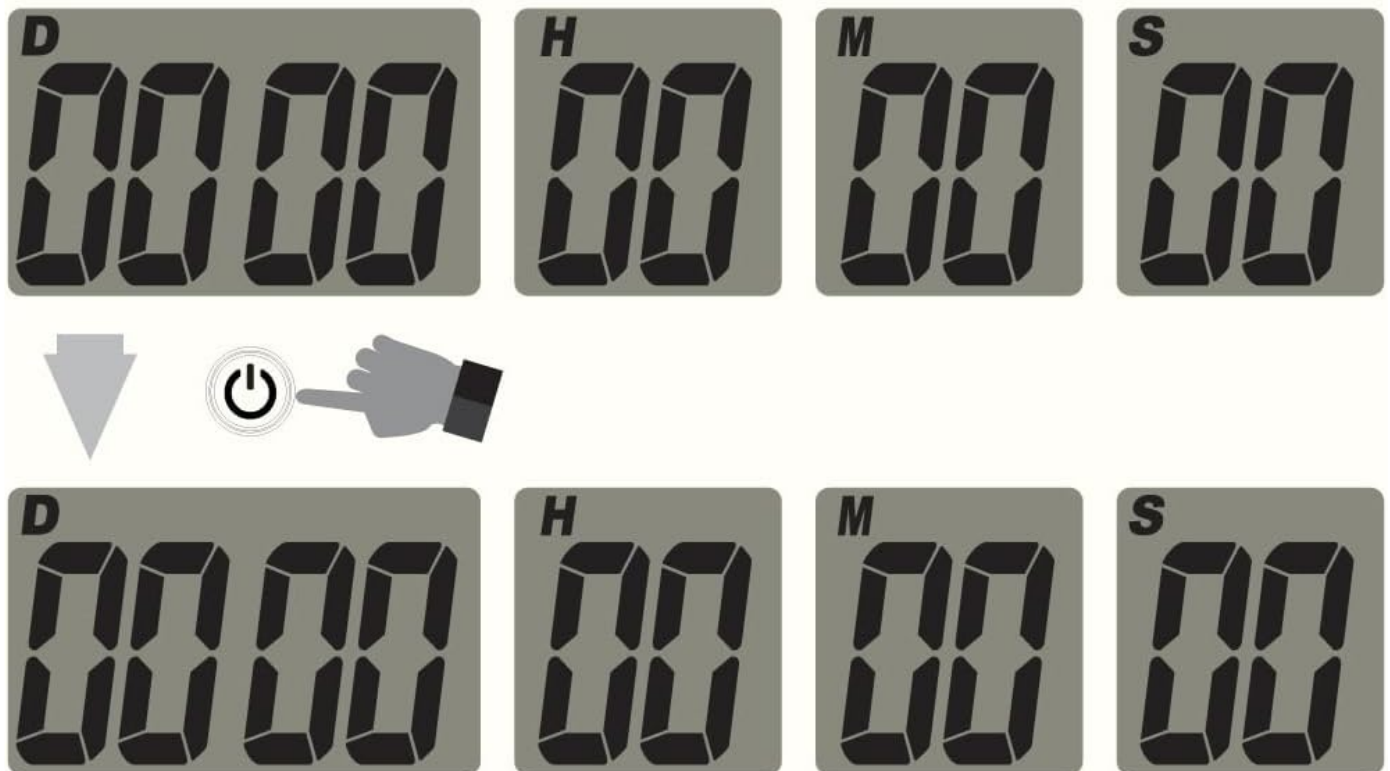


Image: Step-by-step illustration of the user shutdown process for the timer.

5. Application Scenarios

The Runleader Digital 9999 Days Events Timer is ideal for a variety of personal and professional applications:

- **Anniversaries & Birthdays:** Count down to special dates.
- **Festivals & Holidays:** Anticipate upcoming celebrations.
- **Retirement:** Track the days until your retirement.
- **Graduation:** Mark the time remaining until graduation day.
- **Vacations & Travel:** Build excitement for your next trip.

- **Meetings & Deadlines:** Keep track of important professional events.
- **Sports & Fitness:** Use the count-up function for workout durations or race times.


Your browser does not support the video tag.

Video: Overview of the digital countdown days timer, showcasing various application scenarios.

6. Specifications

Attribute	Value
Brand	Runleader
Model Number	RL-HM202A-BK
Color	Black
Product Dimensions	0.43"D x 0.05"W x 0.19"H
Item Weight	1.44 ounces
Number of Settings	4
Batteries	2 Lithium Metal batteries (CR2032) required. (included)
UPC	760752191479

DIMENSION & ACCESSORIES

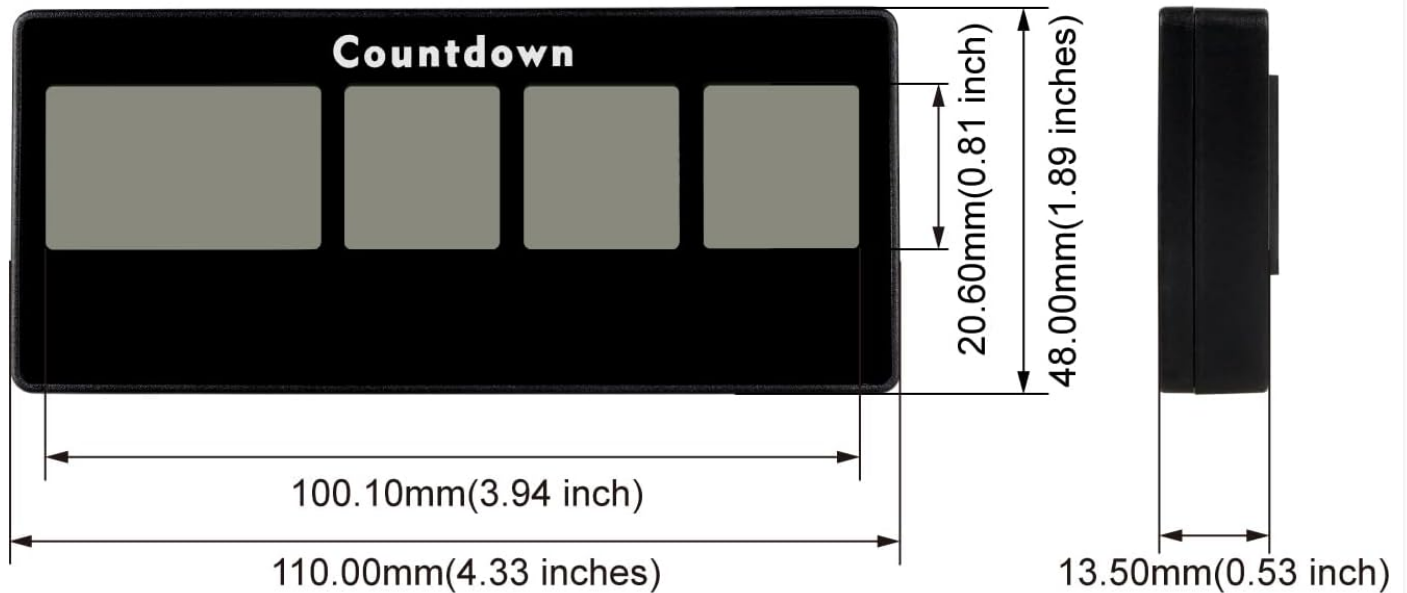

Box*1



User manual*1

Image: Dimensions of the timer and included accessories (box, user manual).

7. Maintenance

- **Battery Replacement:** When the display dims or stops functioning, replace the two CR2032 batteries as described in the Setup section.
- **Cleaning:** Wipe the device with a soft, dry cloth. Avoid using abrasive cleaners or solvents.
- **Storage:** Store the timer in a cool, dry place when not in use for extended periods.

8. Troubleshooting

- **Display is blank:** Check if the batteries are correctly installed and have sufficient charge. Replace if necessary.
- **Timer not responding:** Remove and reinsert the batteries to perform a soft reset.

- **Incorrect time/date:** Follow the operating instructions to reset the current time and countdown target.

9. Warranty and Support

The Runleader Digital 9999 Days Events Timer comes with a **2-year warranty**. For reliable after-sales service and excellent technical support, please contact Runleader customer service through your purchase platform.

ASK A QUESTION ABOUT THIS MANUAL

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page's manual context to help answer it.

Name

Email

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. [Privacy details](#).

Question

Details

Submit question