

- Manuals.plus /
- › [ANJIELO SMART](#) /
 - › ANJIELO SMART 1080P Video Doorbell Camera with 7-inch Touchscreen Intercom System (Model 94202) User Manual

ANJIELO SMART 94202

ANJIELO SMART 1080P Video Doorbell Camera with 7-inch Touchscreen Intercom System (Model 94202)

User Instruction Manual

Overview

Setup

Operating Instructions

Maintenance
Warranty & Support

Troubleshooting

Specifications

PRODUCT OVERVIEW

The ANJIELO SMART 1080P Video Doorbell Camera with 7-inch Touchscreen Intercom System (Model 94202) provides advanced security and communication for your home. This system allows connection to various 12V electronic door locks, such as electric, electromagnetic, cathode, and anode locks. It supports screen monitoring, key-based door unlocking, and remote unlocking via a mobile application.

Key features include PIR motion detection for accurate human recognition, real-time video calls, 1080P HD video quality with wide-angle viewing and infrared night vision, and multiple operating modes for enhanced security and convenience.

SETUP GUIDE

1. Unboxing and Component Check

Before installation, ensure all components are present. The package includes the indoor monitor, memory card, user access card, manual, installation kit, product manual, and outdoor doorbell.


3 IN 1 UNLOCKING



Card Unlock



Monitor Unlock

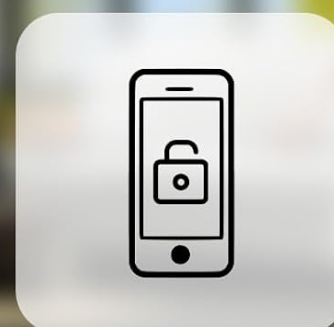

APP Remote Unlock

Image: Various components of the ANJIELO SMART Video Doorbell System laid out, including the indoor monitor, outdoor doorbell, wiring, and mounting hardware.

2. Mounting the Outdoor Doorbell

The outdoor doorbell can be mounted using screws or 3M adhesive tape. For a secure installation, screw mounting is recommended.

1. **Choose Location:** Select a suitable location near your door, ensuring clear visibility and accessibility.
2. **Prepare Surface:** Clean the mounting surface thoroughly to remove any dust or debris.
3. **Mark Drill Holes:** Use the mounting bracket as a template to mark the positions for drilling.
4. **Drill Holes:** Drill pilot holes at the marked positions. Insert wall anchors if necessary.
5. **Secure Bracket:** Attach the mounting bracket to the wall using the provided screws.
6. **Attach Doorbell:** Secure the outdoor doorbell unit to the mounted bracket.

Your browser does not support the video tag.

Video: Installation guide for the outdoor doorbell unit, showing how to mount it to a wall.

Your browser does not support the video tag.

Video: Detailed instructions for mounting the doorbell camera, including preparing the surface and securing the device.

3. Wiring Connections

Connect the outdoor doorbell to the indoor monitor and any electronic door locks using the provided 4-wire cable. Ensure correct polarity and secure connections.

- Purple Brown: Door Exit
- Red Black: Lock+
- Yellow Green: Gate



Image: Diagram illustrating the 4-wire connection for the video doorbell, showing connections for two-way audio and power.

4. Indoor Monitor Installation

Mount the 7-inch touchscreen indoor monitor at a convenient height inside your home. Connect the wiring from the outdoor unit to the monitor. Power on the system once all connections are secure.

Your browser does not support the video tag.

Video: Demonstration of the indoor monitor installation and power-up process.

OPERATING INSTRUCTIONS

1. Real-time Video Call and Two-Way Communication

When a visitor presses the doorbell, the system sends an immediate call notification to your mobile phone via the app. You can then view and speak with the visitor through the monitor or your smartphone.

- **Answer Call:** Tap the answer button on the monitor or app to initiate two-way communication.
- **Missed Calls:** If you cannot answer, the system automatically records the video for later review.

2-WAY AUDIO

Easy to talk with visitors via mobile phone or monitor.



Image: Illustrates two-way audio communication between a visitor at the door and a user viewing from the indoor monitor and a mobile phone.

2. Door Unlocking Options

The system offers multiple ways to unlock connected electronic door locks:

- **Card Unlock:** Use an IC card to unlock the door directly at the outdoor unit.
- **Monitor Unlock:** Unlock the door from the indoor 7-inch touchscreen monitor.
- **App Remote Unlock:** Use the mobile application on your iOS/Android smartphone or tablet to unlock the door remotely.



Image: Shows three methods of unlocking: Card Unlock, Monitor Unlock, and App Remote Unlock, with the outdoor doorbell unit in the center.

One-key Unlock

Can be connected to a 12V electronic door lock
Supports remote unlocking by mobile app



Image: A hand holding a smartphone displaying the mobile app interface with a "Lock" button for one-key remote unlocking.

3. PIR Motion Detection and Night Vision

The integrated PIR motion detection accurately identifies human body contours near your home, sending instant notifications to your device. The 1080P HD camera provides clear images day and night, supported by intelligent infrared night vision with 4 enhanced IR lights.

- **Notifications:** Receive immediate alerts on your phone when motion is detected.
- **Recording:** Motion detection events are recorded and can be played back via the monitor, enhancing home security.

SMART PIR MOTION DETECTION



Image: Depicts the PIR motion detection feature, showing a person detected by the doorbell camera and a notification appearing on a smartphone.

1080P HD CAMERA & NIGHT VISION

You can see clearly without light even dark

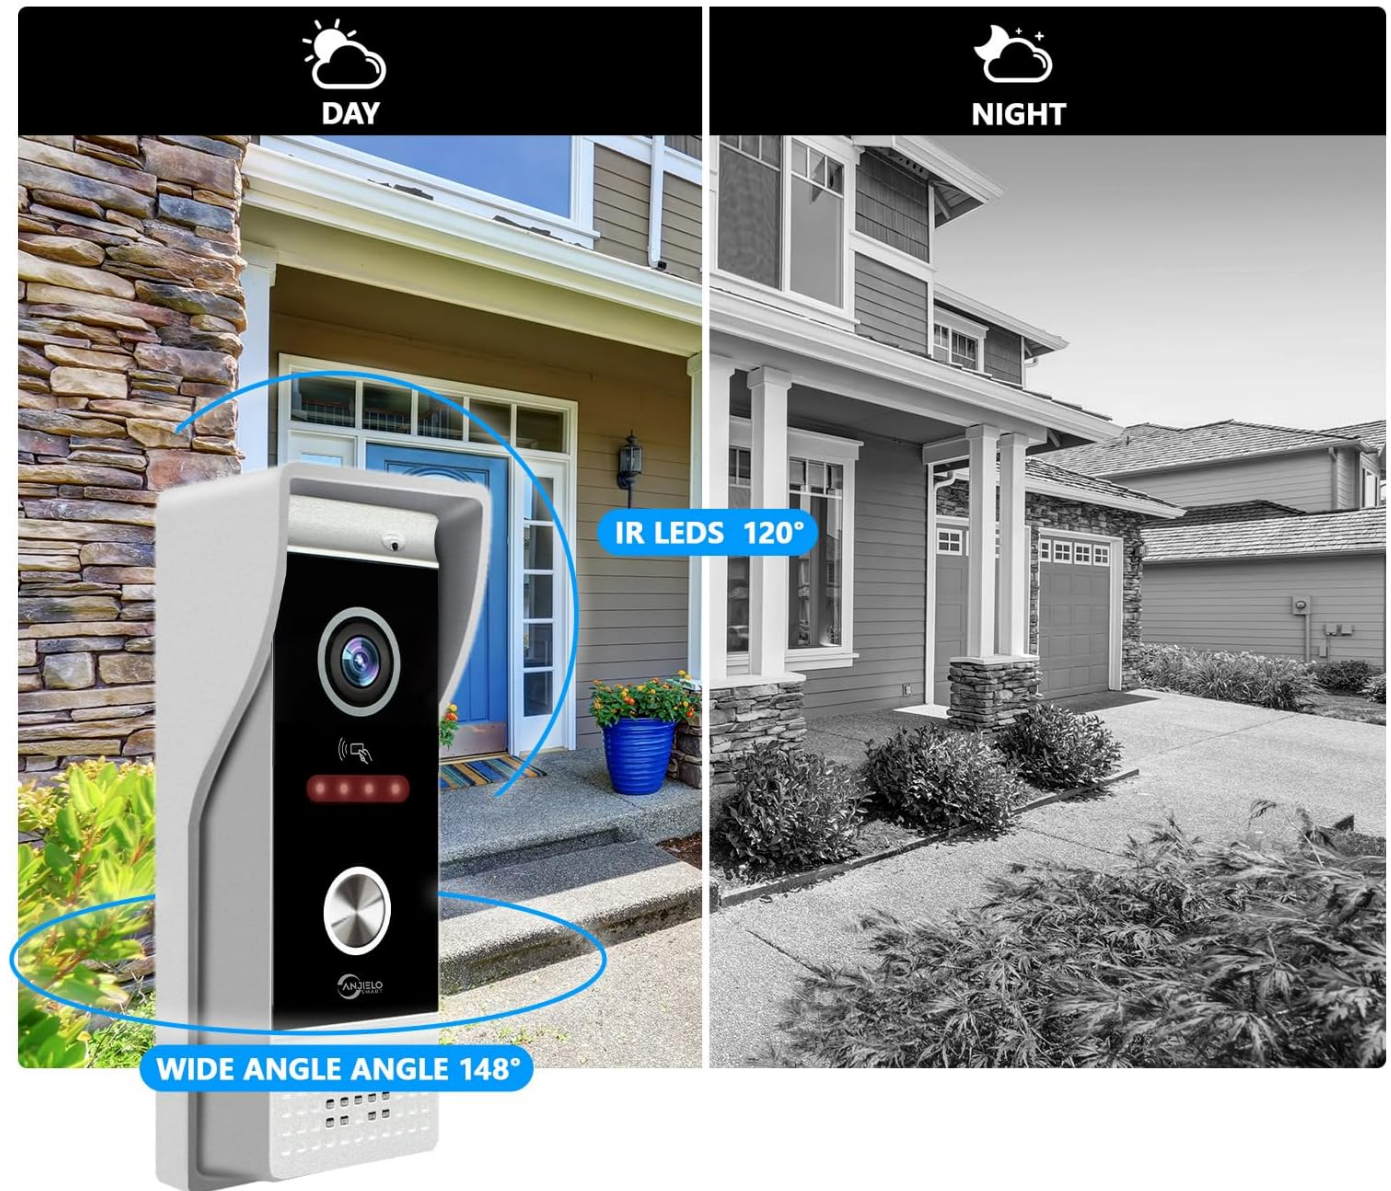


Image: Compares day and night vision capabilities of the 1080P HD camera, highlighting the wide-angle view and IR LEDs for clear night vision.

4. Monitor Modes

The indoor monitor offers three selectable modes:

- **Residence Mode:** Standard operating mode.
- **Not Home Mode:** When selected, the doorbell camera automatically records visitor video calls to inform you of visits.
- **Silent Mode:** The doorbell and monitor will not produce sound, providing a quiet environment.

MAINTENANCE

- **Cleaning:** Regularly wipe the outdoor doorbell camera and indoor monitor with a soft, damp cloth. Avoid abrasive cleaners.
- **Weather Protection:** The outdoor doorbell is IP65 waterproof, designed to withstand rain, heat, and snow. However, avoid direct high-pressure water exposure.

- **Software Updates:** Check the mobile application regularly for firmware updates to ensure optimal performance and security.
- **Memory Card:** The included 32GB Micro SD card provides local storage. Periodically review and manage recorded footage to ensure sufficient space.



Image: Highlights the IP65 waterproof rating of the outdoor doorbell, showing its resilience to various weather conditions.

TROUBLESHOOTING

- **No Power:** Ensure all power connections are secure and the power adapter is functioning correctly.
- **No Video/Audio:** Check all wiring connections between the outdoor unit and indoor monitor. Ensure the mobile app is updated and has necessary permissions.
- **Motion Detection Issues:** Verify PIR sensor is clean and unobstructed. Adjust sensitivity settings in the app if receiving too many or too few alerts.

- **Remote Unlock Failure:** Check network connectivity for both the monitor and your mobile device. Ensure the electronic lock is properly connected and powered.
- **Poor Image Quality:** Clean the camera lens. Ensure adequate lighting, especially at night (IR lights should activate automatically).

PRODUCT SPECIFICATIONS

Brand	ANJIELO SMART
Model Number	94202
Product Dimensions	22 x 2 x 17 cm; 1.18 kg
Color	Black
Material	Metal
Included Components	Indoor monitor, Memory card and user access card, Manual, Installation kit, Product manual, Outdoor doorbell
Switch Installation Type	Wall Mount
Batteries Required	No
ASIN	B0CT2LTDD6
First Available Date	January 23, 2024

Product Size



Image: Shows the dimensions of both the outdoor doorbell unit and the indoor monitor.

WARRANTY & SUPPORT

For warranty information, technical support, or service inquiries, please contact ANJIELO SMART customer service. Refer to the product packaging or the official ANJIELO SMART website for contact details.

Guaranteed software updates until: Unknown (as per product specifications).

© 2024 ANJIELO SMART. All rights reserved.

ASK A QUESTION ABOUT THIS MANUAL

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page's manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. [Privacy details](#).

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question

Open the live page

<https://manuals.plus/asin/B0CT2LTDD6>

More documents and user manuals: <https://manuals.plus/>