

[Manuals.plus](#) /

> [HBN](#) /

> HBN Remote Control Outlet with 100FT RF Signal, Wireless On Off Switch Plug for Household Appliances, Battery Included, 15A/1875W(1 Outlet + 1Remote)

HBN CP-U152R-1-1

HBN Remote Control Outlet User Manual

Model: CP-U152R-1-1

Brand: HBN

PRODUCT OVERVIEW

The HBN Remote Control Outlet provides a convenient and efficient way to manage your household appliances. This wireless system allows you to turn devices on and off remotely, enhancing energy saving and simplifying daily tasks. It features a robust RF signal capable of penetrating walls and doors, offering a wide operational range.



Image: The HBN remote control outlet and its accompanying remote control, showcasing their compact design.

KEY FEATURES

- **Energy Saving & Eco-Friendly:** Compatible with various appliances, supporting up to 125V, 15A, and 1875W resistive load. Helps prevent unnecessary energy consumption and extends appliance lifespan.
- **100FT RF Signal Range:** Powerful RF signal penetrates doors, walls, and windows, allowing control from a distance without Wi-Fi.
- **Easy to Use:** Pre-paired at the factory (battery included). Simply plug in and operate. No programming or tools required for initial use.
- **Customizable Pairing:** Allows pairing one remote with multiple outlets or multiple remotes with one outlet. Each outlet can store up to 5 sets of remote codes.
- **Space-Saving Design:** Compact size (2.1"L x 2.1"W x 1.3"H) occupies only one wall socket, leaving the other available.

Energy Saving and Reliable



Image: Visual representation of the HBN Remote Control Outlet's benefits, including energy saving, smart home integration, 100 ft range, and indoor use.

SETUP INSTRUCTIONS

1. Initial Setup (Pre-paired)

The HBN Remote Control Outlet and its remote come pre-paired from the factory. For immediate use, simply plug the outlet into a standard 125V wall socket. Ensure the appliance you wish to control is plugged into the HBN outlet. The remote control battery is included and pre-installed, often with a protective plastic tab that needs to be removed before first use.

Max **1875W** Power Rate

**Simply insert to use without the need for
programs or settings**



Voltage : 125 Volts

Max. Curren : 15 Amps

Max.Power : 1875 Watts

Max.Range : 100Feet

Image: A HBN remote control outlet plugged into a wall socket, with a lamp connected, illustrating its simple plug-and-play functionality and power ratings.

2. Customizing Pairing (If needed)

If you need to re-pair the remote or pair additional remotes/outlets, follow these steps:

1. Plug the product into the power socket with corresponding parameters.
2. Press the on/off button on the plug and the indicator light will light up.
3. Press and hold the on/off button on the plug until the indicator light flashes for about 3 seconds, then release the button.
4. Press and hold the ON/OFF key of the corresponding group on the remote control until the indicator light on the product stops flashing and the product switches to the function of the pressed key.
5. The remote control and product are paired successfully.

Notice: Each outlet can store up to 5 sets of remote codes. If the number of code combinations exceeds 5, the 5 most recent code combinations will be valid. If the product does not receive the coding information within 10 seconds, the product will exit the coding mode. When the product is powered on, press and hold the switch button to enter the coding mode.



Wireless Remote Control Outlet

Simply Plug and Play

1 Remote + 1 Outlet



Remote Control



Compact Size



100FT Range



Easy to Use

Image: Detailed instructions for pairing the remote control with the outlet, showing the outlet plugged into a wall and the remote.

OPERATING INSTRUCTIONS

Using the Remote Control

Once paired, simply press the "ON" button on the remote to turn on the connected appliance, and the "OFF" button to turn it off. The remote's powerful RF signal allows control from up to 100 feet away, even through walls and doors, providing flexibility in placement.



100FT

Remote Range

**Strong RF signal
works through
door and wall and
windows**



**One switch
control one outlet**



**One switch control
multi outlets**



**One switch control
multi outlets**

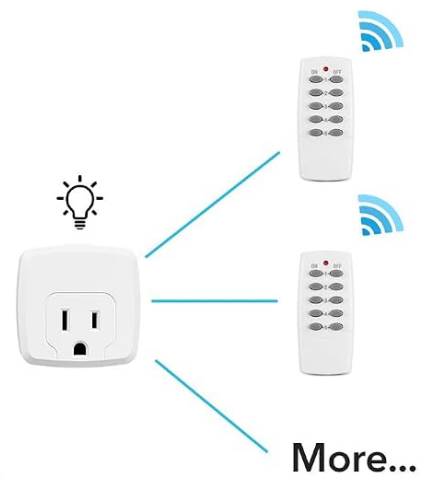


Image: An illustration demonstrating the 100-foot remote range of the HBN outlet, showing its ability to control devices across multiple rooms.

Manual Operation

Each HBN outlet also features a manual on/off button located on the unit itself. This allows you to control the connected appliance directly at the outlet if the remote is not available or if you prefer manual operation.

Applications

This remote control outlet is ideal for a wide range of household appliances, including but not limited to:

- Lamps and lighting fixtures
- Fans and air purifiers
- Coffee makers and small kitchen appliances
- Holiday decorations and seasonal lighting
- Electronics and chargers

Remote Control

Household
Appliances

Endless Options

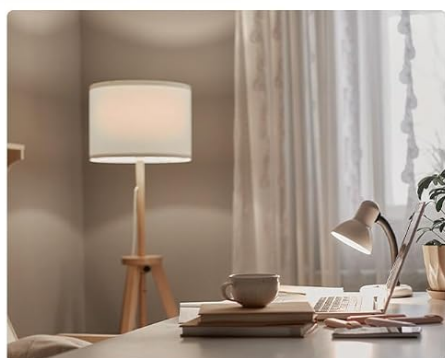


Image: A collage showing various household appliances like lamps, fans, and holiday lights being controlled by the HBN remote control outlet.

Simplify Your Life by Remotely Controlling



**Ideal for people
with limited mobility**



Image: An illustration highlighting the convenience of remote control for individuals with limited mobility, showing various scenarios where remote control is beneficial.

MAINTENANCE

To ensure optimal performance and longevity of your HBN Remote Control Outlet, follow these simple maintenance guidelines:

- **Cleaning:** Wipe the surface of the outlet and remote with a soft, dry cloth. Do not use liquid cleaners or abrasive materials.
- **Storage:** Store the remote in a dry place away from extreme temperatures and direct sunlight when not in use for extended periods.
- **Battery Replacement:** If the remote's indicator light dims or its range decreases, replace the 12V battery. Ensure proper polarity when inserting the new battery.

TROUBLESHOOTING

Problem	Possible Cause	Solution
---------	----------------	----------

Problem	Possible Cause	Solution
Outlet not responding to remote.	Protective plastic tab on battery not removed. Remote battery is low or dead. Outlet and remote are not paired. Beyond effective range or excessive interference.	Remove the plastic tab from the remote's battery compartment. Replace the 12V battery in the remote. Follow the "Customizing Pairing" steps in the Setup section. Move closer to the outlet or reduce sources of RF interference.
Limited remote range.	Obstructions (thick walls, metal objects). Battery low.	Ensure a clear line of sight if possible, or move closer. Replace the remote battery.
Outlet does not fit with another plug in the same wall socket.	Compact design occupies space.	Plug the HBN outlet into the top socket to allow space for a standard plug in the bottom socket. Two HBN outlets cannot be used in a single duplex wall socket.

SPECIFICATIONS

Attribute	Value
Model Number	CP-U152R-1-1
Product Dimensions	2.1"L x 2.1"W x 1.3"H (3.84 ounces)
Voltage	125 Volts
Max. Current	15 Amps
Max. Power	1875 Watts (Resistive Load)
Max. Range	100 Feet (RF Signal)
Batteries	1 x 12V battery (included for remote)
Material	Plastic



Remote Control and Plug Pairing :

1. Plug the product into the power socket with corresponding parameters.
2. Press the on/off button on the plug and the indicator light will light up.
3. Press and hold the on/off button on the plug until the indicator light flashes for about 3 seconds, then release the button.
4. Press and hold the ON/OFF key of the corresponding group on the remote control until the indicator light on the product stops flashing and the product switches to the function of the pressed key.
5. The remote control and product are paired successfully.

Notice:
The plug can store up to 5 sets of remote control codes. If the number of code combinations exceeds 5, the 5 most recent code combinations will be valid.
If the product does not receive the coding information within 10 seconds, the product will exit the coding mode.
When the product is powered on, press and hold the switch button to enter the coding mode.

Image: A visual summary of the technical specifications for the HBN Wireless Remote Control Outlet, including voltage, current, power, and range.

WARRANTY AND SUPPORT

For warranty information, technical support, or any inquiries regarding your HBN Remote Control Outlet, please contact HBN customer service. Refer to the product packaging or the official HBN website for the most up-to-date contact details. HBN is committed to providing quality products and excellent after-sales service to ensure customer satisfaction.

© 2025 HBN. All rights reserved.

ASK A QUESTION ABOUT THIS MANUAL

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page’s manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. [Privacy details](#).

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question

Open the live page

<https://manuals.plus/asin/B0CT5T4MN1>

More documents and user manuals: <https://manuals.plus/>