



Berkel B10-SLC Gravity Feed Slicer User Guide

[Home](#) » [Berkel](#) » Berkel B10-SLC Gravity Feed Slicer User Guide 

Berkel

**B10-SLC
Gravity Feed Slicer**



Model B10-SLC



Intertek

B10-SLC – Gravity Feed Slicers

Contents

- [1 SPECIFIER STATEMENT](#)
- [2 PERFORMANCE FEATURES](#)
- [3 EASY TO OPERATE FEATURES](#)
- [4 SPECIFICATIONS](#)
- [5 Documents / Resources](#)
 - [5.1 References](#)
- [6 Related Posts](#)

SPECIFIER STATEMENT

Berkel Model B10-SLC manual gravity feed slicer features Berkel's hollow ground chromium-plated, carbon steel knife and built-in sharpener. The permanent, tapered guard covers the non-slicing portion of the knife, even when the center plate is removed. The 30° table makes product feed easier, creating more consistent and uniform slices with less waste. The 1 /4 HP motor, 10" knife and large product table are ideal for handling oversize meats, cheeses and a variety of other products. The B10-SLC is easy to clean and disassemble quickly without tools. The compact space-saving design is ideal for limited kitchen counter space. Complies with NSF/ANSI Standard #8.

Project _____
AIA # _____ SIS # _____
Item # _____ Quantity _____ C.S.I. Section 114000

PERFORMANCE FEATURES

- 1-speed, 1 /4 HP, totally enclosed and permanently lubricated knife motor
- Precise slice adjustment to a thickness of 9 /16" (14 mm)
- Carriage handles food up to 8 1 /4" (210 mm) wide, by 6 7 /8" (175 mm) high or 6 7 /8" (175 mm) diameter
- Furnished in 115/60/1, 2.5 amps, AC, ETL listed

EASY TO OPERATE FEATURES

- 30° product table with a removable meat pusher
- Top-mounted, two-stone knife sharpener produces a consistently sharp knife edge
- Attached 6-foot, flexible, 3-wire cord, and plug for the grounded receptacle (5-15P)

EASY-TO-CLEAN FEATURES

- Removable carriage arm
- A permanent, tapered knife ring guard covers a non-slicing portion of the knife even when the center plate is removed; ring guard design provides more room behind the knife for easy cleaning
- The finish is stainless steel and sanitary anodized aluminum; unit disassembles quickly without tools for easy

cleaning

- Nominal 10" (250 mm) diameter; hollow ground, hardened and polished forged chromium-plated carbon steel knife
- Positive, moisture protected, on/off switch with power light indicator

SPECIFICATIONS


Motor: 1-speed, 1/4 HP, totally enclosed, permanently lubricated ball bearings, thermally protected.

Electrical: Furnished in 115/60/1, 2.5 amps, AC, ETL listed.

Finish/Construction: All food contact areas are stainless steel or anodized aluminum including the pusher, gauge plate, product table, center plate, knife ring guard and a one-piece base. The slicer disassembles quickly without tools for easy cleaning.

Knife: Nominal 10" (250 mm) diameter, hollow ground, hardened and polished forged chromium-plated carbon steel, rotates at 290 rpm. Cutting Capacity: Carriage handles food up to 8 1/4" (210 mm) wide by 6 7/8" (175 mm) high or 6 7/8" (175 mm) diameter.

Slice Thickness: The precision system provides infinite slice adjustment and consistent cuts of hard or soft foods from tissue thin to 9/16" (14 mm).

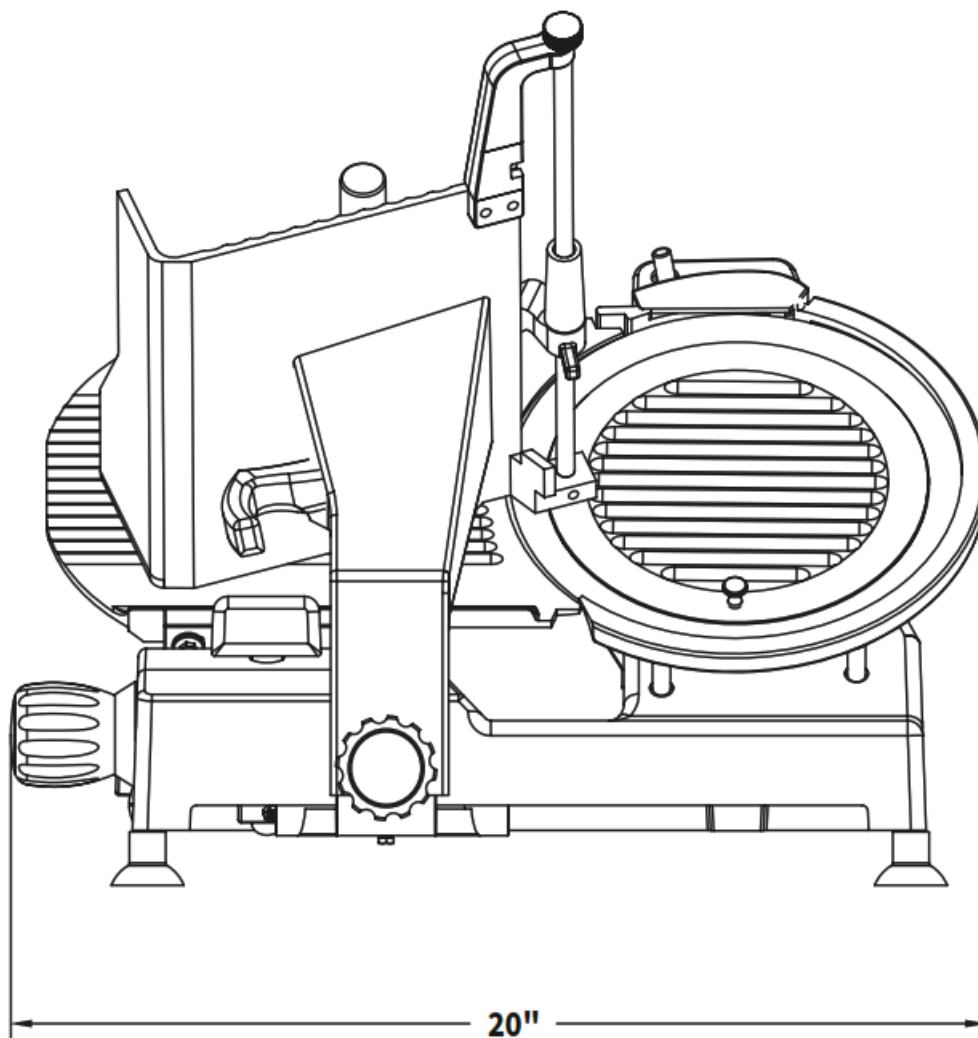


Full Gravity Feed: Full 30° angle feed requires less mechanical pressure. Equipped with a removable anodized aluminum pusher to hold product and minimize waste.

Knife Sharpener: Top mounted, two-stone system for a lasting, razor-sharp edge.

Knife Ring Guard: Permanent, tapered guard covers a non-slicing portion of the knife edge even when the center plate is removed.

The ring guard is designed to provide added room behind the knife for easy cleaning. On/Off Switch: Highly reliable, moisture resistant, on/off switch with power light indicator. Cord and Plug: Attached 6-foot, flexible, 3-wire cord, and plug for the grounded receptacle (5-15P).

Warranty: All parts, service, and travel coverage for one year, excluding wear items.

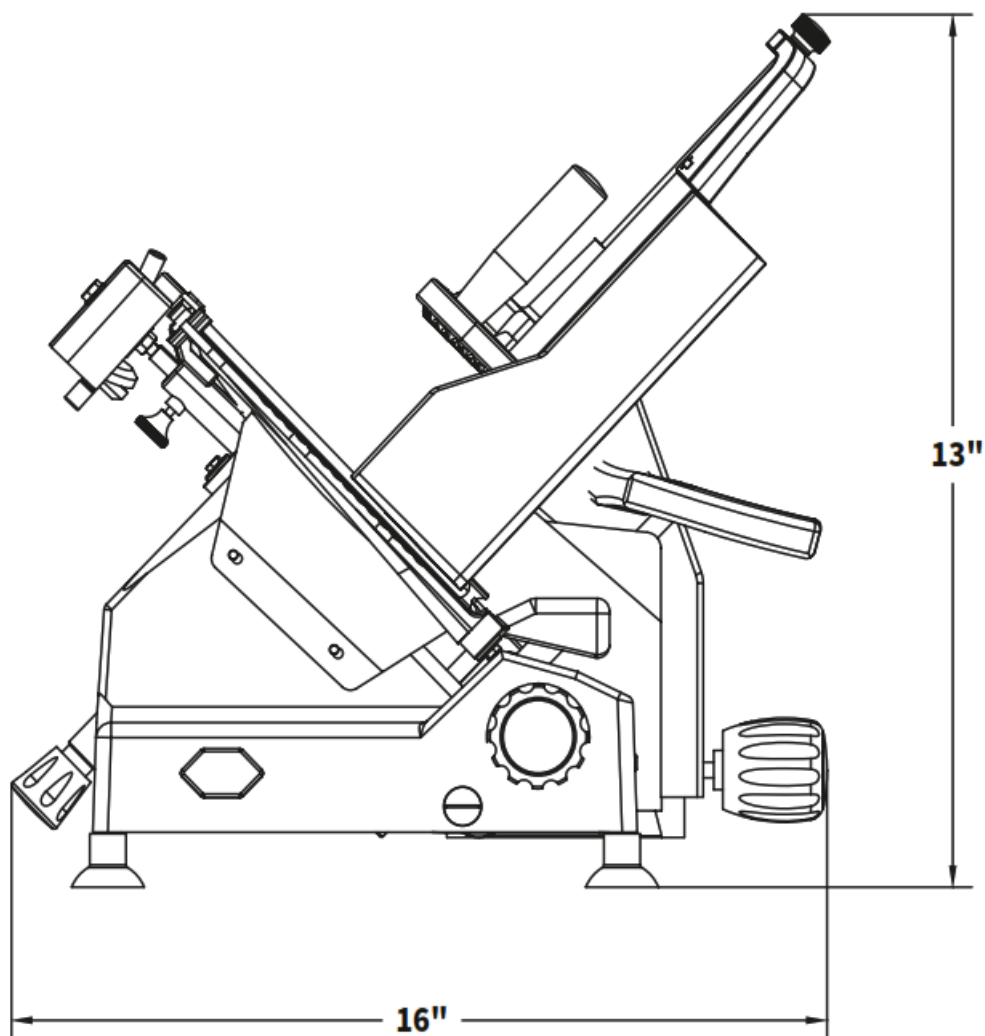

MODEL NUMBER	CUTTING CAPACITY	SLICE THICKNESS	KNIFE DIAMETER	PRODUCT DIMENSIONS		
				WIDTH	DEPTH	HEIGHT
B10-SLC	8 1/4" (210 mm) wide 6 7/8" (175 mm) high 6 7/8" (175 mm) diameter	to 9/16" (14 mm)	10" (250 mm)	16" (407 mm)	20" (510 mm)	13" (330 mm)


MODEL NUMBER	MOTOR	ELECTRICAL	WEIGHT	BOX DIMENSIONS		
				WIDTH	DEPTH	HEIGHT
B10-SLC	1-speed 1/4 HP	115/60/1 2.5 amps	Net 33 lbs. (15 kg) Ship 40 lbs. (18 kg)	22" (560 mm)	24" (610 mm)	18" (458 mm)

Approved by..... Date..... Approved by..... Date

As continued product improvement is a policy of Berkel, specifications are subject to change without notice.

- BK45783 (06-21) Berkel
- 2006 Northwestern Pkwy, Louisville, KY 40203
 - Phone: 800-814-2028
 - Fax: 800-444-0602
 - www.berkelequipment.com Printed in the U.S.A.

Documents / Resources

	<p>Berkel B10-SLC Gravity Feed Slicer [pdf] User Guide</p> <p>B10-SLC Gravity Feed Slicer, B10-SLC, Gravity Feed Slicer, Feed Slicer, Gravity Slicer, Slicer</p>
---	--

References

-  [Berkel Equipment](#)