

Best HBN65 Series Built In Range Hood User Guide

Home » best » Best HBN65 Series Built In Range Hood User Guide 🖺

Contents

- 1 Best HBN65 Series Built In Range
- **2 Product Usage Instructions**
- 3 PRODUCT INFORMATION
- **4 FEATURES**
- **5 DIMENSION**
- **6 SPECIFICATION**
- **7 CONTACT INFORMATION**
- 8 FAQs
- 9 Documents / Resources
 - 9.1 References
- **10 Related Posts**



Best HBN65 Series Built In Range Hood



Product Usage Instructions

Facility

• Follow the provided cutout dimensions for proper installation of the hood. Ensure the electrical connection is a direct wire setup. Use an 8-inch duct or a 3 1/4 x 10-inch duct for ventilation.

Operation

 Use the Capacitive Touch Slider to control the fan speed. Features like Heat SentryTM and SmartSense enhance performance. Use the BEST Kitchen app for additional control options.

Maintenance


 Regularly clean the filters and follow the Filter Clean Reminder. Check for any blockages in the duct and ensure proper airflow for optimal performance.

PRODUCT INFORMATION

Technology



• SmartSense® Uses infrared sensors to monitor heat from the cooking surface and automatically adjusts hood fan speed



• TECHNOLOGY Code Ready Technology® can limit airflow to 300 or 400 CFM to comply with local make-up air code requirements

FEATURES

- Internal blower system powers 650 Max CFM, with less than 0.3 sones at low speed
- · Perimeter aspiration with mesh filters engineered to optimize capture efficiency










At BEST, we make high-performance range hoods that perform beautifully. Astonishingly quiet. Impressively effective. Remarkably efficient. And perfectly suited for the most distinguished kitchens. Whether it's the centerpiece of the room or letting its surroundings shine, BEST is where high-end performance inspires.

DIMENSION

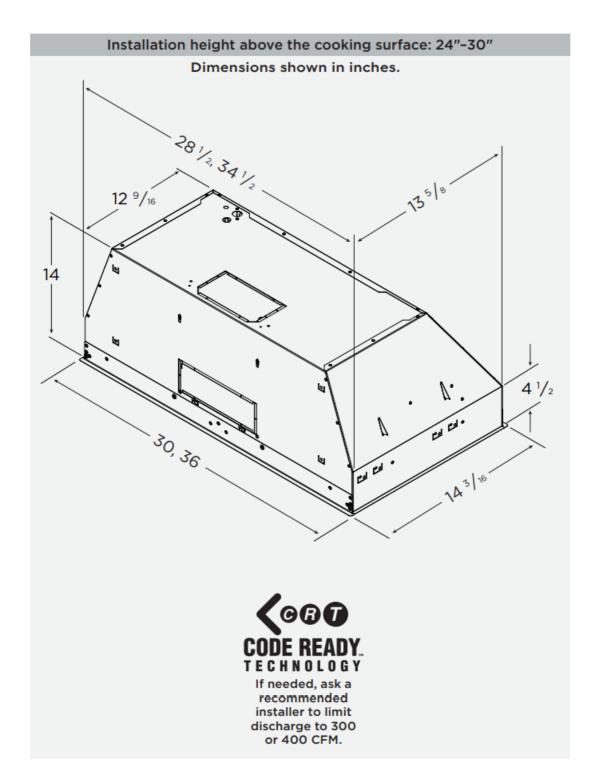

SPECIFICATION

HBN65 SERIES CUTOUT DIMENSIONS

Model	Cutout W x D
HBN65306SS	28 ¹ /2"W x 13 ⁵ /8"D
HBN65366SS	34 ¹ /2"W x 13 ⁵ /8"D

HOOD SIZES

Internal Blower, Single - Depth: 14 3/16"

For exact dimensions, please refer to installation, use and care instructions.

FEATURES

- Finish Brushed Stainless Steel (Grade 430)
- Lighting Type LED Modules (6W per module)
- Number of Modules 2
- · Lighting Levels 4
- · Lighting Modules Included Yes
- Control Type 4-speed Capacitive Touch Slider
- Control Features Heat SentryTM, Delay-off, Wi-Fi/Bluetooth Connectivity, Voice Control, SmartSense, Filter Clean Reminder
- Remote Control BEST Kitchen app
- Filter Type Perimeter with Mesh
- · Non-ducted Capability No
- HOOD BLOWER INCLUDED
- Max Blower CFM* 650
- ACCESSORIES
- ADA Kit HAWRK5
- Universal MUA Damper MD8TU
- Power Cord Kit HCK44
- INSTALLATION REQUIREMENTS
- Amps @ 120V 3.8
- Electrical Connection Direct Wire
- Duct Size 8" or 3 1/4" x 10"
- · Duct Direction Vertical (round) or
- Horizontal
- · Backdraft Damper Included

MAX Blower CFM indicates the performance of the hood blower in open air and is not HVI certified.

CONTACT INFORMATION

- BESTRANGEHOODS.COM
- USA <u>800-558-1711</u>
- BESTRANGEHOODS.CA
- CANADA 800-567-3855

FAQs

- Q: What is the maximum blower CFM for this hood?
 - A: The maximum blower CFM is 650.

• Q: Can this hood be used without ducting?

• A: Yes, this hood has non-ducted capability for installation without ducting.

Documents / Resources



Best HBN65 Series Built In Range Hood [pdf] User Guide

HBN65306SS, HBN65366SS, HBN65 Series Built In Range Hood, HBN65 Series, Built In Range Hood, Range Hood, Hood

References

User Manual

Manuals+, Privacy Policy

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.