



BLAUPUNKT Velocity Wiper Blade Multi Adapter Instructions

[Home](#) » [Blaupunkt](#) » BLAUPUNKT Velocity Wiper Blade Multi Adapter Instructions 

BLAUPUNKT Velocity Wiper Blade Multi Adapter Instructions



Contents


- [1 HANDLING & CAUTIONS](#)
- [2 INSTALLATION GUIDE](#)
- [3 Documents / Resources](#)
- [4 Related Posts](#)

HANDLING & CAUTIONS

1. Be sure to clean the windshield if it is stained with oil, dirt and grime to ensure the service life of wiper.
2. Windshield wiper blade should be replaced when they neither perform as expected, nor provide a sufficient level of safety.
3. The recommended replacement duration for maximum performance is six months.
4. If wiper blades do not suspend off the windshield, operate the wiper until they reach the center of the windshield, turn off ignition and change the wiper blades.


INSTALLATION GUIDE

Preinstalled Adapter B1

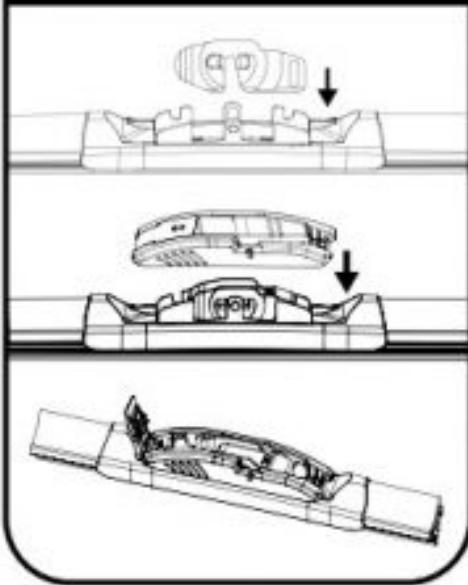

Remove

Preinstalled Adapter B1
Before Installing
Adapter M3 or M5

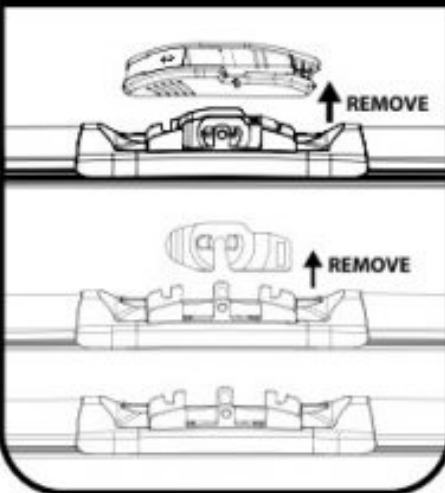


1. Hook (1/2", 3/4")




2. Adapter B1



Install

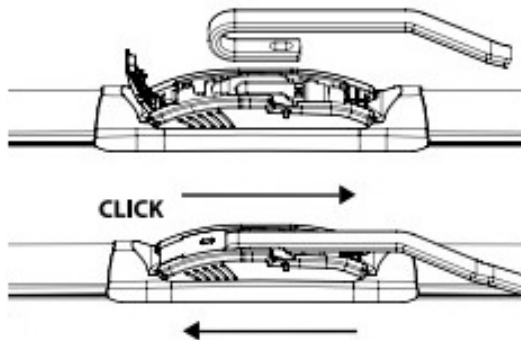


1. Pin & Hood

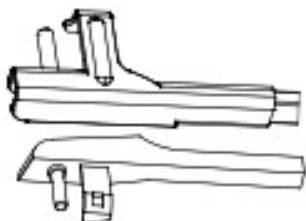

2. Adapter M3-PH



Install

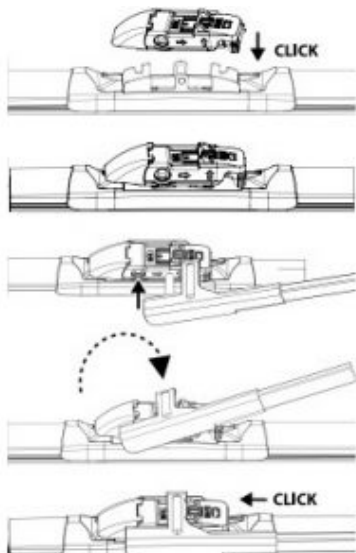

1. Push Button




2. Adapter M3-TL




Remove

REMOVE M3-PT

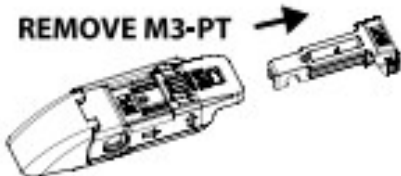





REMOVE M3-PH

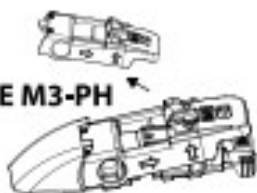

USE M3-TL ATTACHED




Install

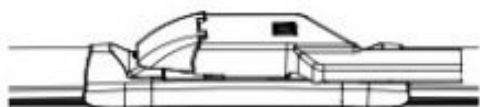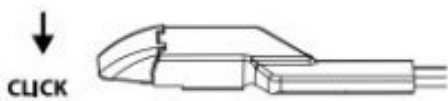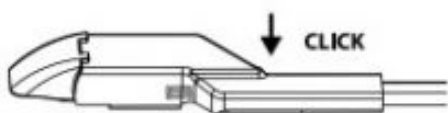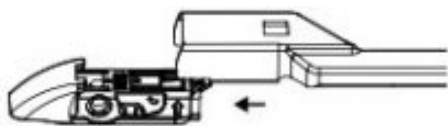


1. Push Button Narrow (16mm)






2. Adapter M3-NTL

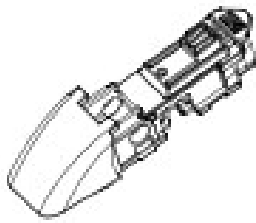


Remove

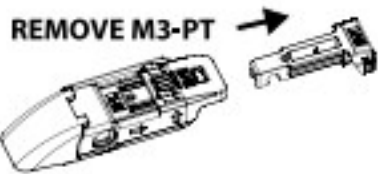


Install

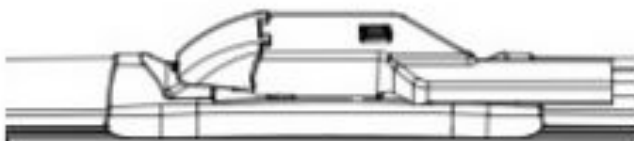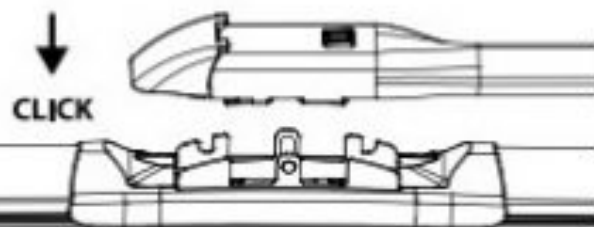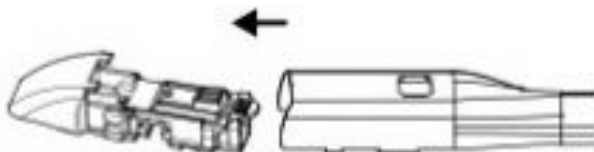



1. Pinch Tab

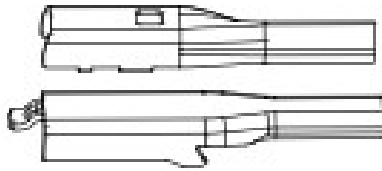


2. Adapter M3-PT

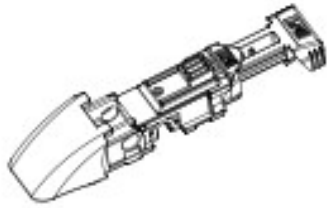


Remove

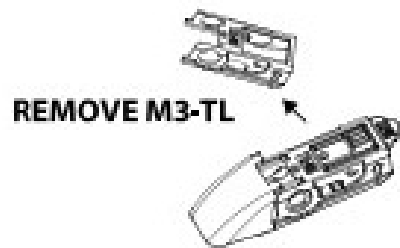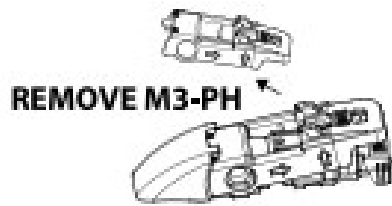

Install

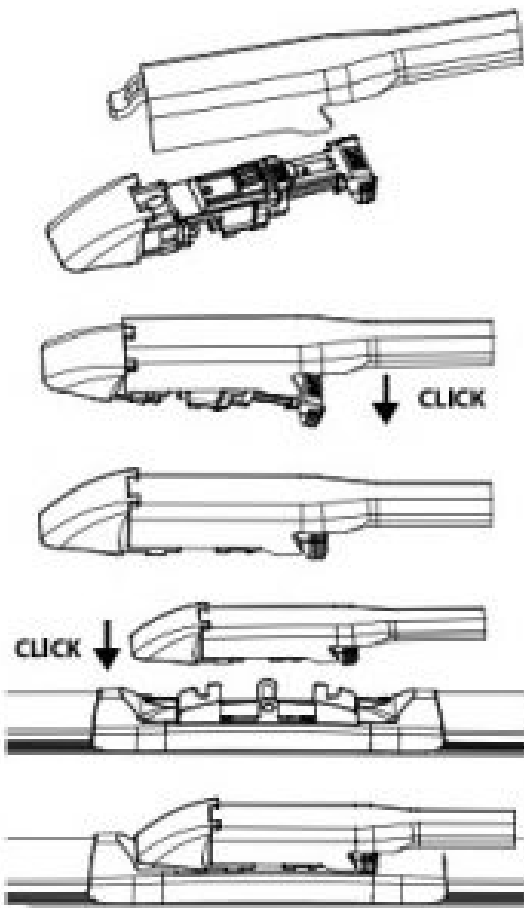


1. Top Lock

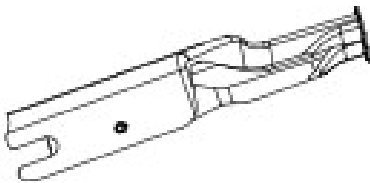

2. Adapter M5-TLC



Install

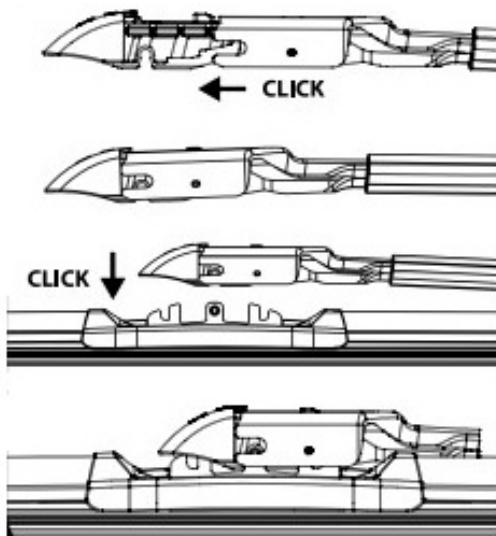

Designed and engineered by Blaupunkt Competence Centre

Documents / Resources

	BLAUPUNKT Velocity Wiper Blade Multi Adapter [pdf] Instructions Velocity Wiper Blade Multi Adapter
---	---