



BLITZWOLF BW-SS12 Smart WiFi Shutter Switch with App Remote Control User Manual

[Home](#) » [Blitzwolf](#) » BLITZWOLF BW-SS12 Smart WiFi Shutter Switch with App Remote Control User Manual 

BLITZWOLF BW-SS12 Smart WiFi Shutter Switch with App Remote Control User Manual




Contents

- [1 What's in the box BW](#)
- [2 To know the product](#)
- [3 Indicator Meaning](#)
- [4 General Parameters](#)
- [5 How To Use](#)
- [6 Q&A](#)
- [7 Documents / Resources](#)

What's in the box BW

SS12 Curtain Smart Switch*1, Screw Kit*1, M/I*1

To know the product

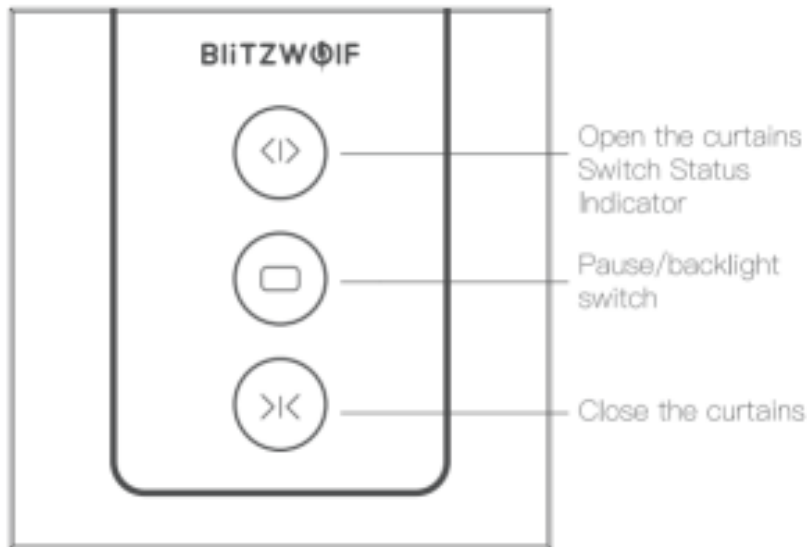

1. It is recommended to test the product performance before installation and use, and then install and debug after understanding the working principle of the product.
2. The smart switch is not just a functional switch, it is essentially an electrical appliance and can work independently.
3. The on/off button can be used as a reset button, long press to reset, the green indicator light flashes.
4. Only supports 2.4GHz WIFI network (802.11 b/g/n), and the installation location is recommended to be within the WIFI coverage.
5. Basic electrical wiring knowledge or experience is required, otherwise please consult a professional electrician.

Note: The smart switch is divided into the panel and the back shell wiring part. The panel has switch buttons and indicator lights, and the wiring part of the rear shell should be wired according to the instruction diagram. Non—professionals are forbidden to disassemble the PCB circuit part for maintenance.

Indicator Meaning

Indicator Status	Indicator meaning	Trigger method
Switch Status Indicator Blue	The smart light is turned on and the light is off	Power on
Switch Status Indicator Red	The light is turned on, touch to turn off the light	Trigger when the light is turned on
Switch Status Indicator Flashes Green	WIFI to be connected	It will enter the paired WIFI state after powering on for the first time. When a forced reset is required, press and hold the first switch button for 20s to trigger.

General Parameters


Working Voltage	AC110-240V(50/60Hz)
Maximum Load	600W (normal work), Instantaneous Maximum 2400W
Working Current	MAX 10A
Wireless Protocol	IEEE 802.11 b/g/n (2.4GHz WIFI)
Material	Flame retardant ABS+ Glass
Size	86mm*86mm*34mm

How To Use



1. Use a screwdriver to open the panel.



2. Connect as shown in the figure.

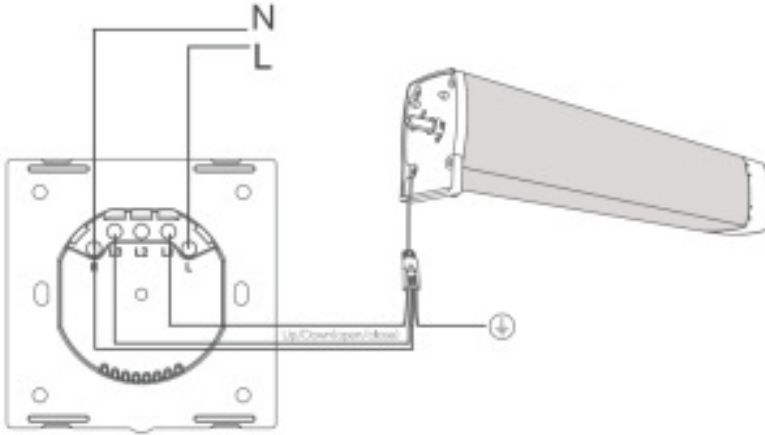

3. Use the screws in the screw package to fix and fix the rear cover panel.

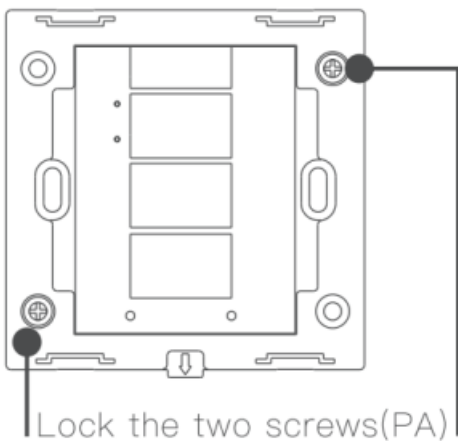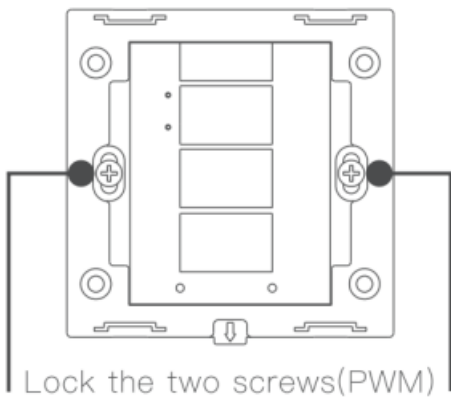

4. Connect to the pairing APP The paired WIFI needs to use 2.4GHz WIFI, and the password is entered correctly without special characters. The WIFI signal strength is high. It is recommended that the product is connected and paired. The distance between the mobile phone and the WIFI is close, and the 5GHz WIFI does not support connecting to this product. After the new installation is powered on, it is in the pairing state by default. If you are not in the pairing state, you need to press and hold the first switch button until the green indicator light flashes.

1. Scan qr code identification/search and download BlitzWolf APP in the APP Store




2. Sign up for BlitzWolf APP
 3. Go to the home page of APP, click + on the upper right corner, and select the corresponding device to add
 4. Confirm that the device WIFI icon is in flashing state and the device is in pairing state
 5. Press the operation prompt to enter the WIFI password
 6. Wait a moment to complete the pairing process and customize the device name.
5. Learn to use and be familiar with your APP * After the configuration is successful, you can control the Wifi light switch on the APP. * The timer can be set for each group on the APP. * App can share the control of the device with your family/friends.
6. If you need to connect to Alexa, Google Home, IFTTT control, please follow the instructions in the APP to connect.

Q&A

1. Failed to pair to WIFI Check whether the WIFI password is entered correctly, whether the WIFI is 2.4GHz WIFI, the product, mobile phone and WIFI are close when connected, and the smart switch installation must be within the coverage of the WIFI signal. If the WIFI quick connection mode is unsuccessful, you can use the hotspot network distribution mode to search for the AP signal emitted by the smart switch.
2. Touch the switch button, the light is off It is recommended to check whether the indicator light has changed, whether the lamp is burned out or has poor contact, and whether the wire connection is correct.
3. APP cannot remotely control the lamps It is recommended to check whether the WIFI network can connect to the Internet normally and whether the smart switch has been successfully paired and bound in the APP.

Documents / Resources

	BlitzWolf BW-SS12 Smart WiFi Shutter Switch with App Remote Control [pdf] User Manual BW-SS12, Smart WiFi Shutter Switch with App Remote Control
---	---