BLNAN 010A RGB Dimmable Square LED Ceiling Light

BLNAN 010A RGB Dimmable Square LED Ceiling Light User Guide

Contents

BLNAN

BLNAN 010A RGB Dimmable Square LED Ceiling Light

Product Information

Ceiling Light

A smart ceiling light that can be controlled remotely using the Tuya App and a remote control.

Specifications

- **Power Supply:** Electric
- **Control Method:** Tuya App, Remote Control

Product Usage Instructions

Tuya App Instructions

1. Download and install the Tuya App by scanning the QR code provided or searching for SmartLife in the app store.
2. After the App scans the device, click "Add" to bind the device.
3. Click "Done" to enter the device control page.

Remote Control Instructions

1. **Pairing:**
   1. Connect the device to the power supply and ensure it works normally (light turns on slowly).
   2. Turn off the power for 5-10 seconds and then turn it back on.
   3. Long press Button 1 until the device flashes 3 times quickly, then release.
   4. The code pairing of the remote control is successful. You can now control the device using the remote.
2. **Clearing Code:**
   1. Connect the device to the power supply and ensure it works normally (light turns on slowly).
   2. Turn off the power for 5-10 seconds and then turn it back on.
   3. Long press Button 2 until the device flashes 3 times quickly, then release.
   4. The remote control is successfully cleared. It needs to be repaired before use.

Frequently Asked Questions (FAQ)

Q: How do I reset the device if I encounter issues with control?

A: To reset the device, follow the steps for clearing the code in the remote control instructions section.

Tuya App Instructions

Download and install App

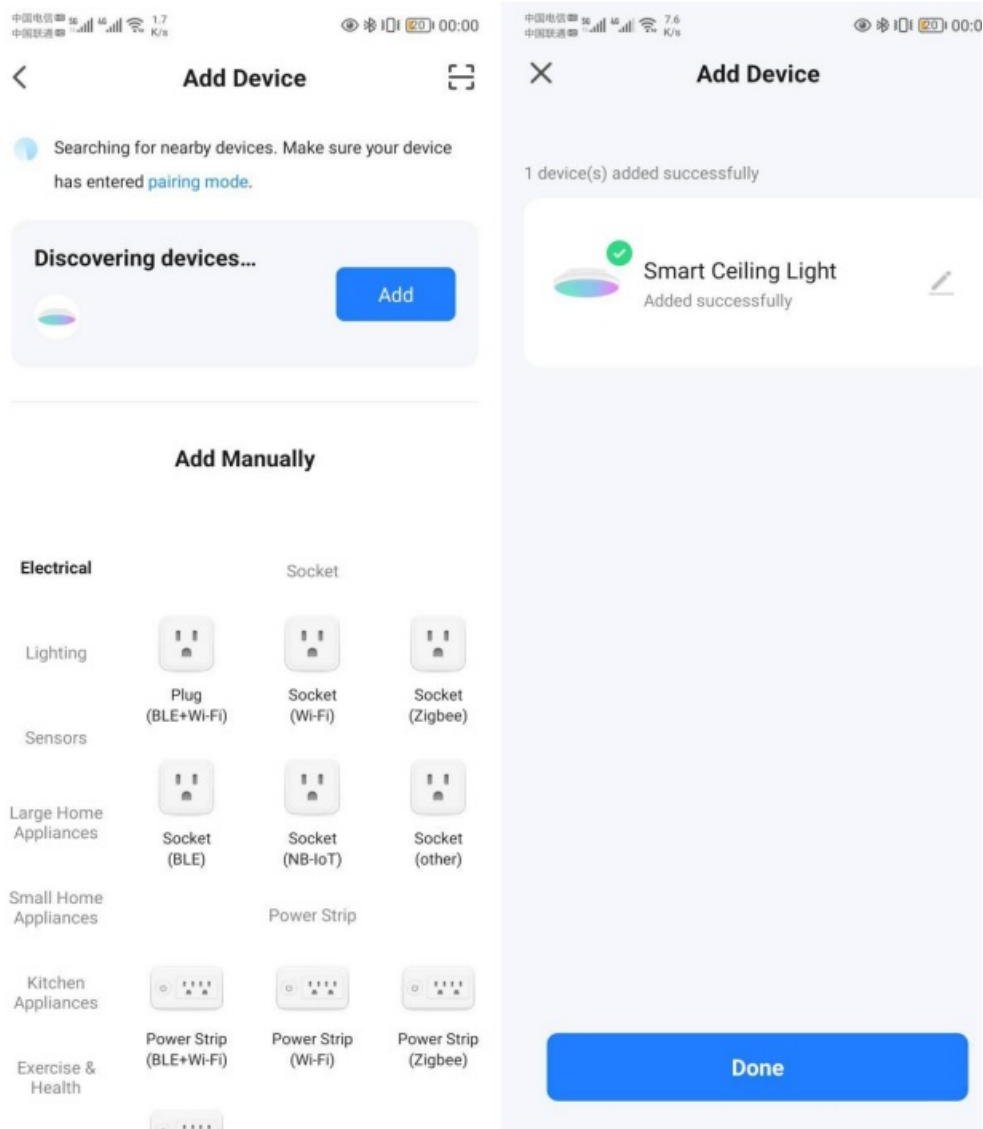Scan the QR code below or search SmartLife to download

For the first use, you need to use your mobile phone number or Email address to register and log in.
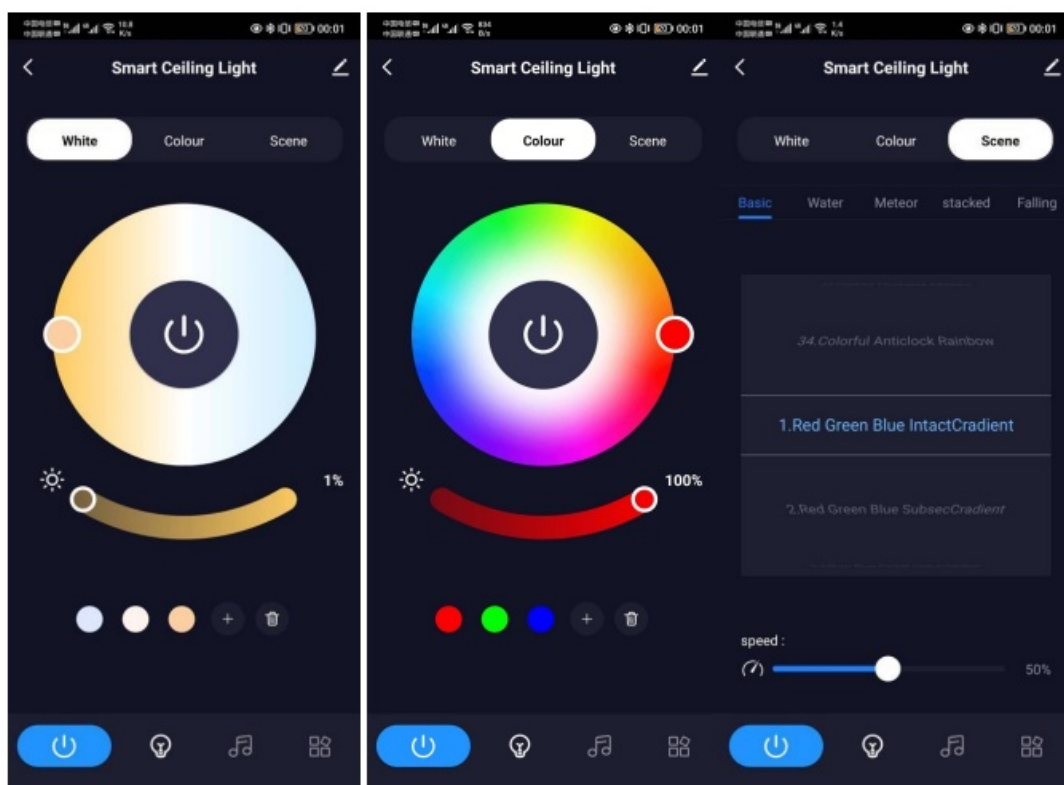
Device configuration and control

1. Connect the device to the power supply and confirm that the device can work normally (the light turns on slowly);
2. Continuous ON-OFF-ON-OFF-ON Power on and off three times (power on for 2~3 seconds, power off for 5~10 seconds) to make the device enter the distribution network mode, at this time the main light source will remind you to breathe;
3. Open the Smart Life App, click Add Device in the upper right corner, and wait for the App to automatically search for peripheral devices;
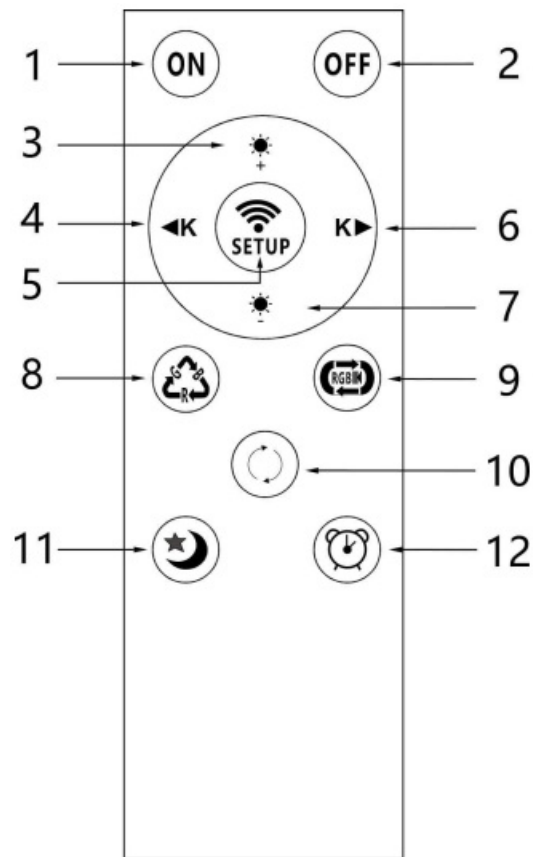
4. After the App scans the device, click Addto bind the device;

<   Add Device   ⊏⊐

◯   Searching for nearby devices. Make sure your device
     has entered pairing mode.

Discovering devices…

◯   **Add**

Add Manually

Electrical   Socket

Lighting

| Plug (BLE+Wi-Fi) | Socket (Wi-Fi) | Socket (Zigbee) |

Sensors

| Socket (BLE) | Socket (NB-IoT) | Socket (other) |

Large Home
Appliances

Small Home
Appliances   Power Strip

Kitchen
Appliances

| Power Strip (BLE+Wi-Fi) | Power Strip (Wi-Fi) | Power Strip (Zigbee) |

Exercise &
Health

✕   Add Device

1 device(s) added successfully

✓ **Smart Ceiling Light**
     Added successfully   ✎

Done

5. Click Done to enter the device control page

Remote Control Instructions

Pair code

1. Connect the device to the power supply and confirm that the device can work normally (the light turns on slowly);
2. Turn off the power of the device for 5~10 seconds and then turn on the power again;
3. Long press Button 1 until the device flashes 3 times quickly, then let go;
4. The code pairing of the remote control is successful. At this time, you can press the button to control the device.

Clear code

1. Connect the device to the power supply and confirm that the device can work normally (the light turns on slowly);
2. Turn off the power of the device for 5~10 seconds and then turn on the power again;
3. Long press button 2 until the device flashes 3 times quickly, then let go;
4. The remote control is successfully cleared. At this time, the remote control can no longer control the device and needs to be repaired before it can be used.

Control

- **Button 1:** On, short press to turn on the main light source;
- **Button 2:** Off, short press to turn off the main light/color light;
- **Button 3:** Increase the brightness, short press to adjust the brightness of 10 levels, and long press to adjust the brightness steplessly;
- **Button 4:** Reduce the temperature, short press to adjust the 10-level temperature, long press to adjust the temperature steplessly;

- **Button 5:** Press and hold this button for 5 seconds to enable the device to enter the App distribution network mode;
- **Button 6:** Temperature increase, short press 10 levels of temperature adjustment, long press to stepless temperature;
- **Button 7:** Brightness reduction, short press for 10 levels of brightness adjustment, long press for stepless brightness adjustment;
- **Button 8:** Color static cycle switching (red, yellow, green, blue, purple, white);
- **Button 9:** Color dynamic cycle switching;
- **Button 10:** White light/neutral light/warm light three color temperature cycle switching;
- **Button 11:** Night light;
- **Button 12:** 60-second countdown timer off, white light/color light all off at the same time;

Documents / Resources

Ceiling Light	**BLNAN 010A RGB Dimmable Square LED Ceiling Light** [pdf] User Guide
	010A RGB Dimmable Square LED Ceiling Light, 010A, RGB Dimmable Square LED Ceiling Light, Dimmable Square LED Ceiling Light, Square LED Ceiling Light, LED Ceiling Light, Ceiling Light

References

- **User Manual**